


High Insulation Resistance Reed Relays

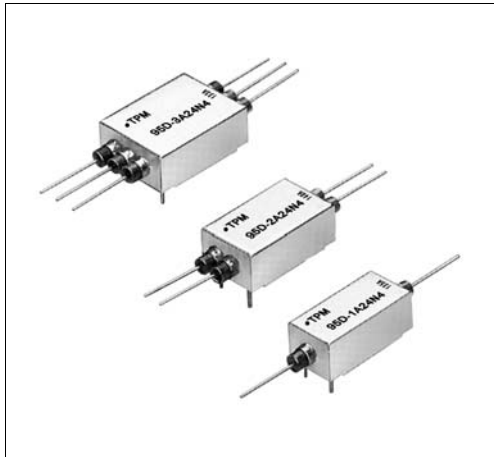



The 95 series features the ultra high insulation resistance in the Sanyu relays product line. Easy mounting became possible by and this structure, and also controlling minute signal possible by guarding both Electrostatic Shield and Magnetic Shield.

- High insulation resistance up to 10^{14}
- Available 1 form A, 2 form A, and 3 form A
- Contact rating available 10W and 50W
- Lead configuration in lead and PCB



Mechanical Dimensions

All dimensions are measured in inches (millimeters).



9 5 D - 1 A □ 4 N 4 - □ □

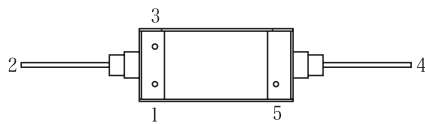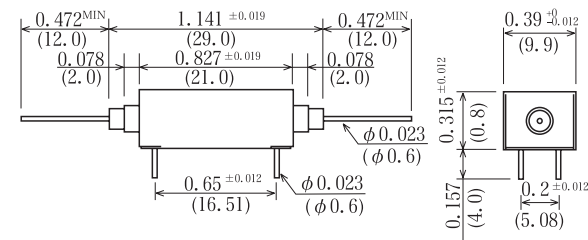

9 5 D - 3 A □ 4 N 4 - □ □

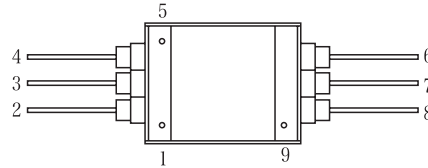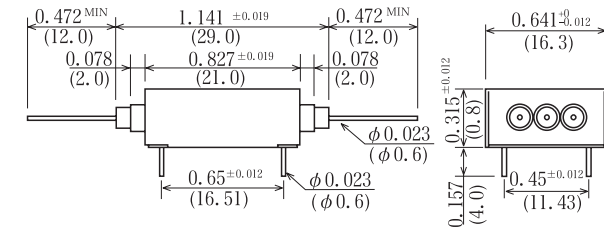

9 5 D - 2 A □ 4 N 4 - □ □

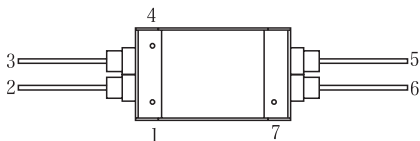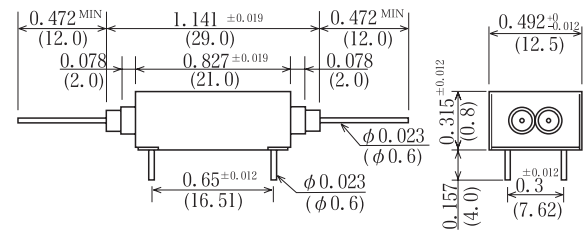



95D Series			Model Number	Model Number	Model Number	Model Number	Model Number	Model Number			
			95D-1A□4N4-60	95D-1A□4N4	95D-2A□4N4-60	95D-2A□4N4	95D-3A□4N4-60	95D-3A□4N4			
Parameters	Test Condition	Units	1 Form A		2 Form A		3 Form A				
Coil Specifications											
Nominal coil voltage		VDC	5	12	24	5	12	24	5	12	24
Coil resistance	±10% at 20°C	Ω	450	2500	8000	260	1500	6000	180	1000	4000
Operating voltage	15°C~35°C	VDC Max	4.0	9.6	19.2	4.0	9.6	19.2	4.0	9.6	19.2
Release voltage	15°C~35°C	VDC Min	0.7	1.2	2.4	0.7	1.2	2.4	0.7	1.2	2.4
Contact Ratings											
Switching voltage	Peak AC resistance	Volts	100	350	100	350	100	350	100	350	
Switching current	Max. DC/Peak AC resistance	Amps	0.5	0.5	0.5	0.5	0.5	0.5	0.5	0.5	
Carry current	Max. DC/Peak AC resistance	Amps	1.0	2.5	1.0	2.5	1.0	2.5	1.0	2.5	
Contact rating	Max. DC/Peak AC resistance	Watts	10	50	10	50	10	50	10	50	
Life expectancy	1V, 10mA	×10 ⁶ cycles	1000	1000	1000	1000	1000	1000	1000	1000	
Contact resistance	Maximum initial	mΩ	150	150	150	150	150	150	150	150	
Contact resistance stability	Maximum initial	mΩ	5.0	5.0	5.0	5.0	5.0	5.0	5.0	5.0	
Relay Specifications											
Insulation resistance	Between open contacts	Ω-min	10 ¹⁴	10 ¹⁴	10 ¹⁴	10 ¹⁴	10 ¹⁴	10 ¹⁴	10 ¹⁴	10 ¹⁴	
	Contacts to shield	Ω-min	10 ¹³	10 ¹³	10 ¹³	10 ¹³	10 ¹³	10 ¹³	10 ¹³	10 ¹³	
	Shield to coil	Ω-min	10 ¹¹	10 ¹¹	10 ¹¹	10 ¹¹	10 ¹¹	10 ¹¹	10 ¹¹	10 ¹¹	
Capacitance	at 100V 20°C 40%RH	pF-Max									
Across open contacts	Shield guarding										
Contact to Shield	Contacts open, Shield floating										
Open contact to coil	Shield guarding										
Dielectric strength	Between contacts	VDC	200	500	200	500	200	500	200	500	
	Contacts to shield		1000	1000	1000	1000	1000	1000	1000	1000	
Operating time (Including bounce)	At nominal coil voltage, 100Hz Square wave	msec	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
Release time	Diode suppression	msec	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	
Environmental Ratings	Schematics										
Mesurement reference conditons	Top view										
Temp. : 15°C~35°C Humidity : 25%~85%RH											
Atmospheric pressure : 860~1060hPa											
Storage temp. : -40°C~+80°C											
Operating temp : -20°C~+60°C											
The operating and Release Voltage and the coil resistance are specified at 20°C. These values change approximately 0.4%/°C change in the ambient temperature.											
Vibration : 20Gs to 2000Hz											
Shock : 50Gs											

Notes :

- (1) Values are specified with a resistive load being applied. A contact protective circuit is required for C and L type loads.
- (2) The values for the operating time and release time however, are when the rated coil voltage is applied and a clamp diode is attached.

ORDERING CODE

9 5 D - □ A □ 4 N 4 - □ □
(1) (2) (3)

Example 95D-1A14N4 Represents Series 95D 1Form A, Dry Reed (Rhodium), Coil Voltage 5V and Electrostatic Shield.

- (1) Number of capsules
1-1 capsule
2-2 capsules
3-3 capsules
- (2) Coil Voltage
1-5VDC
2-12VDC
3-24VDC
- (3) Special Code Example
60-Contact Rating 10W