


### Features

- +10 dBm Output Level at 2062.50MHz
- 2<sup>nd</sup> Harmonic : < -20 dBc
- Spurious Level : < -70 dBc
- Lock Time : < 10ms
- 50mA Current Consumption
- Strip-line Resonator

### Description

The plerow™ PLL synthesizer module was designed for use in wireless and wireline systems in a wide range of frequency from 50 MHz to 6 GHz. ASB's PLL provides exceptionally low spurious and phase noise performance with fast locking time and low current consumption. All products are available in a surface-mount type package.



### Specifications

Parameter	Unit	Min.	Typical	Max.
Frequency Range	MHz		2062.5	
Output Power	dBm	+8	+10	+12
Supply Voltage	V	4.75	5.00	5.25
Current Consumption	mA			50
Channel Step Size	kHz		-	
2 <sup>nd</sup> Harmonics	dBc		-20	
Spurious Level	dBc		-70	
Lock Time	ms		3	10
Reference Frequency	MHz		-	
Reference Input Level	dBm		-	
Phase Noise (C / N)	@ 1 kHz		-73	
	@ 10 kHz		-100	
	@ 100 kHz		-118	
Output Impedance	Ω		50	
Operating Temp. Range	°C	-40	+25	+85
Package Type & Size	mm	SMT, 19.0W×19.0L×5.8H		

1) Measurement conditions are as follows: T = 25°C, V<sub>CC</sub> = 5.0 V, Freq. = 2062.5MHz, 50 ohm system.



### More Information

Website: [www.asb.co.kr](http://www.asb.co.kr)  
E-mail: [sales@asb.co.kr](mailto:sales@asb.co.kr)

Tel: (82) 42-528-7223  
Fax: (82) 42-528-7222

ASB Inc., 4th Fl. Venture Town Bldg., 367-17 Gojeong-Dong, Seo-Gu, Daejeon 302-716, Korea

### Outline Drawing

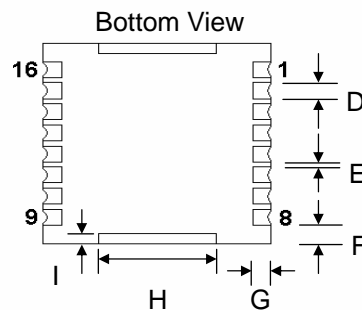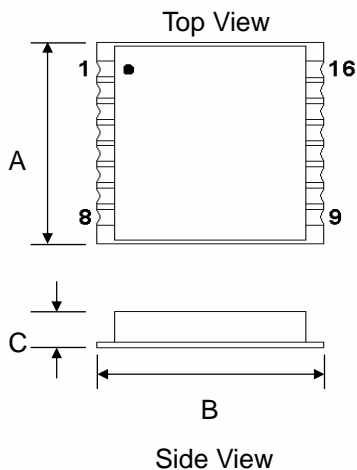

Pin Configuration	
1	Ground
2	Ground
3	Ground
4	Ground
9	VCC (VCO)
13	RF OUT
15	VCP (PLL)
16	LOCK DETECT
Others	Ground

Dimension (mm)	
A	19.0
B	19.0
C	5.8
D	1.5
E	0.5
F	1.75
G	1.35
H	15.0
I	0.9
Tolerance: ± 0.2	