


6		5		4		3		2		1	
CATALOG NUMBER	MATERIAL NUMBER	CABLE RANGE	NOMINAL ROD DIAMETER	LENGTH "M"	LENGTH "B"	BREAK STRENGTH* (LBS/N)	 UL LISTED	 CSA APPROVED	PRODUCT SELECTION NUMBER		
35901	1300950146	.50-.61 / 12.7-15.5	.56 / 14.2	11.0±1.50 / 279±38	5.0±0.50 / 127±13	3400 / 15124	NO	YES	PL050-1		
35902	1300950147	.62-.74 / 15.7-18.8	.68 / 17.3	11.0±1.50 / 279±38	6.0±0.50 / 152±13	4100 / 18238			PL062-1		
35903	1300950148	.75-.99 / 19.1-25.1	.87 / 22.1	13.0±1.50 / 330±38	6.0±0.50 / 152±13	4100 / 18238			PL075-1		
35904	1300950149	1.00-1.24 / 25.4-31.5	1.12 / 28.4	14.0±1.50 / 356±.38	7.0±1.00 / 178±25	5800 / 25800			PL100-1		
35905	1300950150	1.25-1.49 / 31.8-37.8	1.37 / 34.8	15.0±2.00 / 381±51	7.0±1.00 / 178±25	5800 / 25800			PL125-1		
35906	1300950151	1.50-1.74 / 1.50-44.2	1.62 / 41.1	16.0±2.00 / 406±51	7.0±1.00 / 178±25	7500 / 33362			PL150-1		
35907	1300950152	1.75-1.99 / 44.5-50.5	1.87 / 47.5	18.0±2.00 / 457±51	8.0±1.00 / 203±25	10000 / 44482			PL175-1		
35908	1300950153	2.00-2.49 / 50.8-63.2	2.25 / 57.2	19.0±2.00 / 483±51	9.0±1.00 / 229±25	10000 / 44482			PL200-1		
35909	1300950154	2.50-2.99 / 63.5-75.9	2.75 / 69.9	19.0±2.00 / 483±51	10.0±1.00 / 254±25	13000 / 57827			PL250-1		

*TO DETERMINE RECOMMENDED WORKING LOAD, DIVIDE BREAK STRENGTH BY 5.

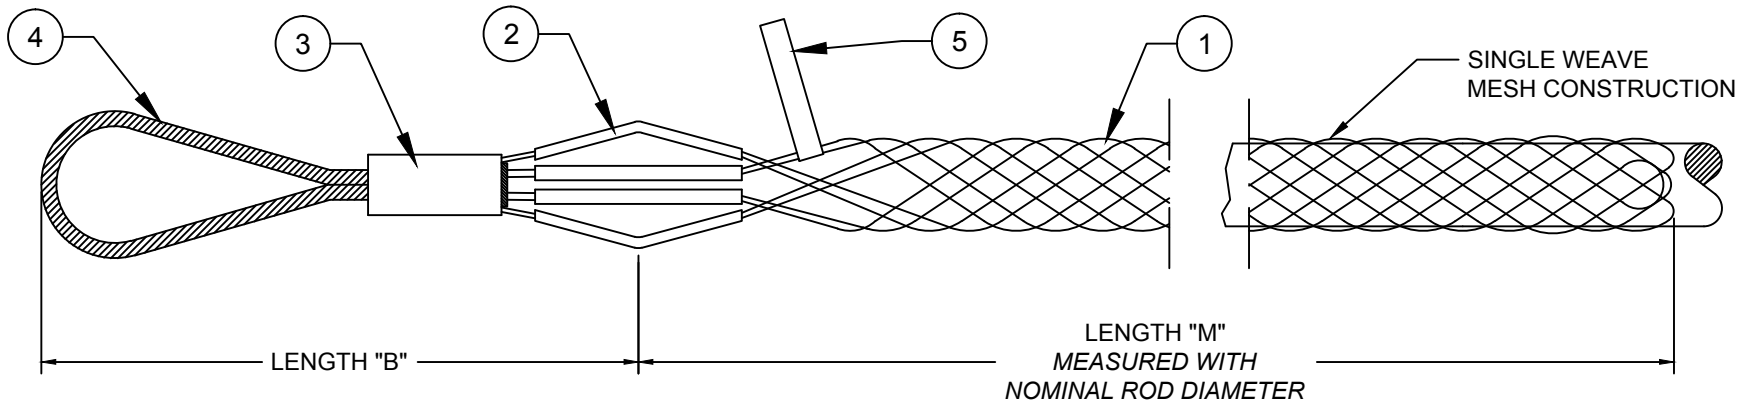

ITEM	DESCRIPTION	MATERIAL	RELEASE SALES DRAWING	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)	DIMENSION STYLE INCH/MM	SCALE NTS	DESIGN UNITS INCH	THIRD ANGLE PROJECTION
1	WIRE MESH	GALVANIZED STEEL	EC NO: IGC2014-1487	▽=0	4 PLACES ±---	DRAWN BY DATE			
2	SHOULDER PROTECTOR	ALUMINUM	DRWN: HRUIZ01 2014/05/13	▽C=0	3 PLACES ±---	CHECKED BY DATE			
3	FERRULE	ALUMINUM	CHKD: HKNEELAN 2014/05/13		2 PLACES ±.13 ±.010	APPROVED BY DATE			
4	BALE WIRE	GALVANIZED STEEL	APPR: JFMURPHY 2014/10/14		1 PLACE ±.25 ±.020	JFMURPHY 2014/10/14			
5	LABEL	MYLAR			ANGULAR ±1/2°	MATERIAL NO.			
					DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	SEE TABLE			
						SIZE A			

PULLING GRIPS
LIGHT DUTY
FLEXIBLE EYE
MOLEX INCORPORATED
SD-130095-101
SHEET NO. 1 OF 1