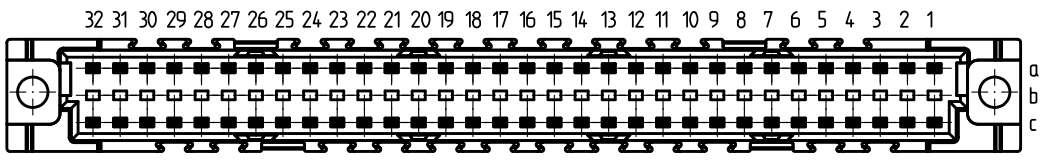
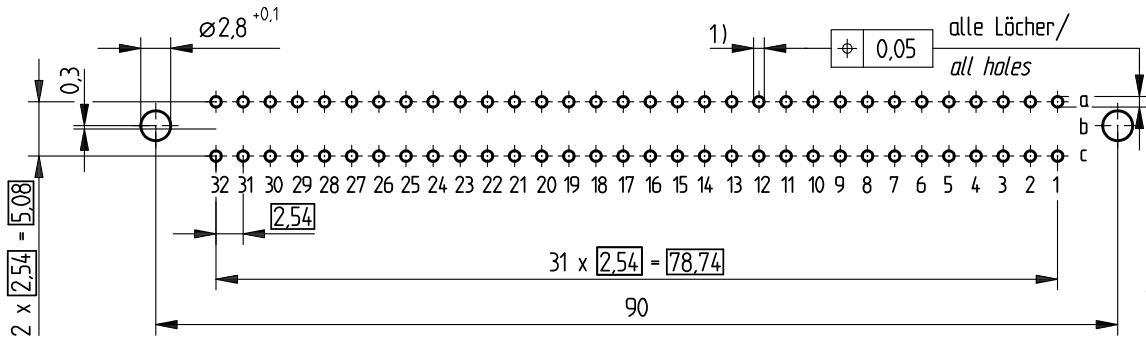


Bestückungsplan / contact layout

■ bestückt / assembled



Leiterplatten-Lochbild / PCB drillhole pattern



Elastische Einpresszone / compliant pressfit zone

Isolierwerkstoff / housing material : PBT GF30

Bauart 7 / type 7

Anforderungsstufe 2 = 400 Steckzyklen / performance class 2 = 400 mating cycles

Fehlende Masse und Angaben nach IEC 60 603-2 / DIN EN 60 603-2

Missing information and dimensions per IEC 60 603-2 / DIN EN 60 603-2



Schichtaufbau im metallisierten Loch siehe Zeichnung 164062 / Nr. 6

diameter of drilled hole see drawing 164062 / No. 6

- 1) $\varnothing 1,0^{+0,09}_{-0,06}$ Durchmesser des metallisierten Loches
- $\varnothing 1,0^{+0,09}_{-0,06}$ Diameter of finished plated-through hole

Bedruckung siehe Zeichnung 294875

Marking see drawing 294875

| | | |
|--|---|--|
| Information: All rights reserved. Only for information. To insure that this is the latest version of this drawing, please contact one of the ERNI companies before using. | Tolerances  All Dimensions in mm | Scale 2:1 |
| | Subject to modification without prior notice. Drawing will not be updated. | Designation Federleiste C 64 EE Fem. Connector C 64 Pressfit |
|  www.ERNI.com | 254120 | |
| Index | Date | H:00065119.SZA |
| | | STVC |

Consider protection memo from DIN 34