
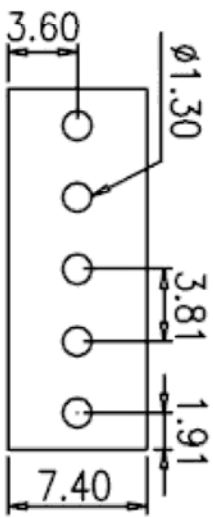


Rev	AWO #	Description	Date	Appr
-	9427	RELEASED	3/06/09	

APPROVED: _____

DATE: _____ TITLE: _____

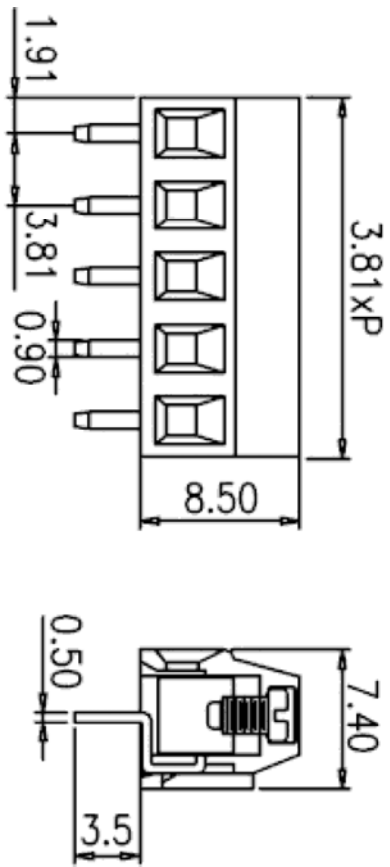

SPECIFICATIONS:

Material: Insulator: PA66, rated UL 94V-0

Insulator color: Green

Contact: Bronze, Tin plated

Screw: Steel, M2/Zn plated

Electrical:

Operation voltage: 300 VAC max

Current rating: 12 Amps max per Pole

Rated surge voltage: 1.6/2/3 KV

Mechanical:

Torque (Lb-in): 1.73

Solid wire: 30-16 AWG

Environmental:

Operating temperature: -40°C to +105°C

Lead free, RoHS compliant.

Recommended soldering temp: 235°C for 5 sec.



UNLESS OTHERWISE SPECIFIED	
ALL DIMENSIONS ARE MM	
TOLERANCES EXCEPT AS NOTED	
INCHES	HOLDS
.X ± .10	ØX ± .10
.XX ± .020	ØXX ± .015
.XXX ± .015	ØXXX ± .010
APPROVALS	DATE
DRAWN	3/06/09
CHECKED	
APPROVED	

ADAM TECH
 909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: TERMINAL BLOCK, PCB, VERTICAL, 3.81MM PITCH

SIZE	PART NO.	REV.
X	EBW-XX-B	-
REF:	S0024T	SCALE: NTS
SHEET 1 OF 1		