


Component Side

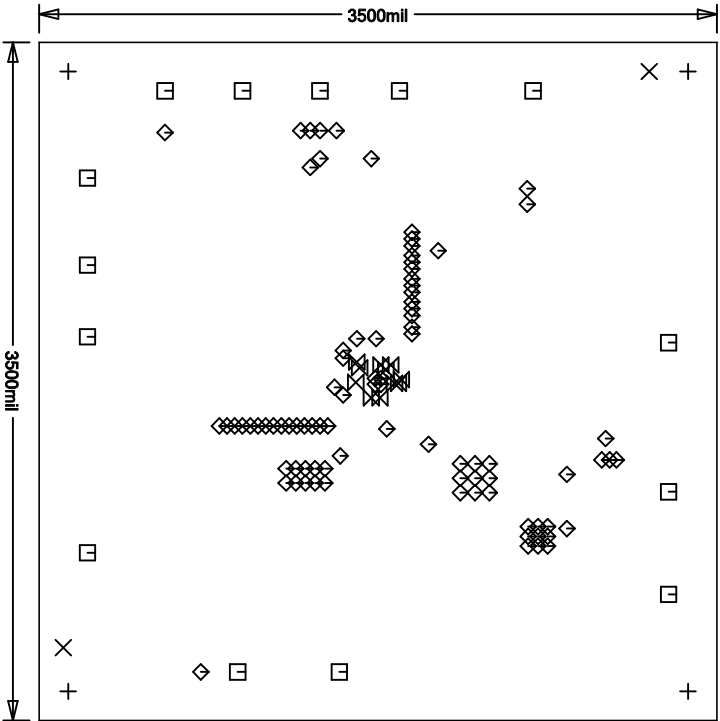


SIZE	QTY	SYM	PLATED	TOL
187	4	+	YES	+/-3mil
70	2	X	NO	+/-3mil
94	14	□	YES	+/-3mil
8	88	◇	YES	+/-3mil
6	11	⊗	YES	+/-3mil

REVISIONS		
REV	APPR	DATE

NOTES: UNLESS OTHERWISE SPECIFIED:

- ARTWORK PIN DEMO CIRCUIT 12688
- FAB PER IPC-A-600, 4-LAYERS.
- MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4  
.062 +/- .005 INCH THICKNESS WITH 2 OZ.  
COPPER FINISH ON EXTERNAL LAYERS AND  
1 OZ. COPPER ON INTERNAL LAYERS.  
FLAMMABILITY RATING: 94 V-2 MINIMUM.
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.  
0.00 ARE PRIMARY DATUMS.
- BOARD: SELECTIVE PLATED BOARD. SOLDER  
MASK OVER BARE COPPER, COLOR, GREEN LPI,  
GOLD IMMERSION BOTH SIDES.  
SILKSCREEN COMPONENT SIDE WITH WHITE NON-  
CONDUCTIVE INK.  
PLATE THRU ALL HOLES WITH COPPER  
MIN. PLATING THICKNESS: 1 OZ. EXCEPT  
WHERE PLATING NOT REQUIRED
- DRILL: ALL HOLES SHALL BE DRILLED +/-3mil  
WITH RESPECT TO CTR. OF DRILLED PAD.  
ALL HOLES FINISHED SIZE AFTER PLATING.
- DO NOT ALTER ARTWORK TO ADD LOGO OR DATE CODE BUT YOU MAY  
MODIFY PAD SIZE TO MEET END FINISH.
- PCBs SHOULD BE RoHS COMPLIANT.
- SCORING:



Fabrication Drawing

APPROVALS		TITLE: L73755EUD-1/-2	
DRAWN	INIT DATE	High Voltage LED Controller	
CHECK	DESIGN	FD Demo Circuit 12688	
ENGR	16mils	REV. 0	
SCALE = NONE		DES-23xxx	