



REVISIONS			
REV	DESCRIPTION	APPR	DATE

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.  
2 OZ. COPPER FINISH ON OUTER LAYERS.  
1 OZ. COPPER FINISH ON INNER LAYERS.  
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.  
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.  
0.000 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH  
HOLES WITH COPPER. .001 INCH THICK MIN. ALL  
HOLE SIZES ARE SPECIFIED AFTER PLATING.  
HOLE LOCATION TOLERANCES ARE +/- .003  
INCH IN RELATION TO CENTER
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.

WHITE TIN IMMERSION BOTH SIDES.

6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
8. SCORING:

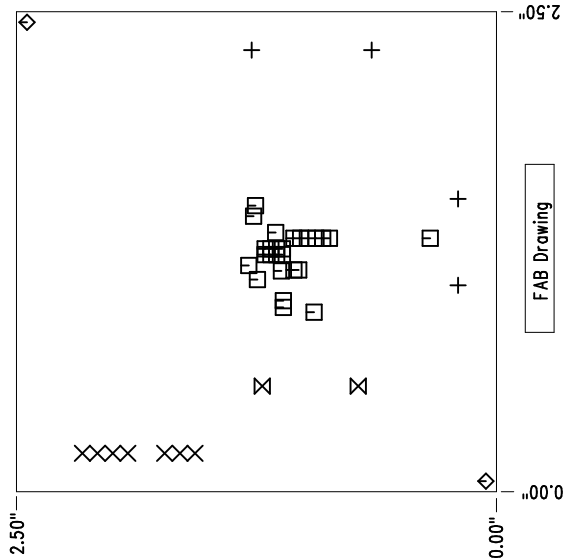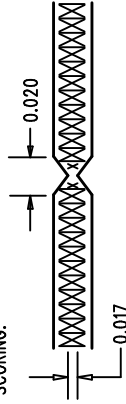

SIZE	QTY	SYM	PLTD
95	4	+	PLTD
35	7	X	PLTD
10	26	□	PLTD
70	2	◇	NPLTD
40	2	⊗	PLTD

FAB DRAWING

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOLERANCES ON ANGLE ±1  
2 PLACE ±.01 3 PLACE ±.005  
INTERPRET DIM AND TOL  
PER ASME Y14.5M - 1994

APPROVALS		INIT		DATE	
DRAWN	CHECK				
DESIGN	ENGR	J. Wu	D. Burgeon	12/28/05	12/28/05
SCALE = NONE					

**LINEAR TECHNOLOGY**  
1630 McCarthy Blvd.  
Milpitas, CA 95035  
PH: (408)432-1900

**TITLE:** LTC3533EDE  
High Efficiency Synchronous Buck-Boost Converter  
with Automatic Burst Mode

SIZE	DC999A	REV.	A
A			

SHT 1 of 1