IXYS


Advance Technical Information

TrenchMV™ Power MOSFET

IXTA98N075T
IXTP98N075T

V_{DSS} = 75 V
I_{D25} = 98 A
$R_{DS(on)}$ ≤ 10 mΩ


N-Channel Enhancement Mode




Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 175°C	75	V
V_{DGR}	T_J = 25°C to 175°C; R_{GS} = 1 MΩ	75	V
V_{GSM}	Transient	± 20	V
I_{D25}	T_C = 25°C	98	A
I_{LRMS}	Package Current Limit (RMS):	75	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	280	A
dv/dt	$I_S \le I_{DM}$, di/dt ≤ 100 A/μs, $V_{DD} \le V_{DSS}$ $T_J \le 175°C$, R_G = 5 Ω	5	V/ns
I_{AR}	T_C = 25°C	25	A
E_{AS}	T_C = 25°C	600	mJ
P_d	T_C = 25°C	230	W
T_J		-55 ... +175	°C
T_{JM}		175	°C
T_{stg}		-40 ... +175	°C
T_L	1.6 mm (0.062 in.) from case for 10 s	300	°C
T_{SOLD}	Plastic body for 10 seconds	260	°C
M_d	Mounting torque (TO-220)	1.13 / 10	Nm/lb.in.
Weight	TO-220	3.0	g
	TO-263	2.5	g

Symbol	Test Conditions (T_J = 25°C unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0 V, I_D = 250 μA	75			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 100 μA	2.0		4.0	V
I_{GSS}	V_{GS} = ±20 V, V_{DS} = 0 V			± 200	nA
I_{DSS}	$V_{DS} = V_{DSS}$ V_{GS} = 0 V			2	μA
	T_J = 150°C			150	μA
$R_{DS(on)}$	V_{GS} = 10 V, I_D = 25 A, Notes 1, 2			10	mΩ

TO-263 (IXTA)



TO-220 (IXTP)



G = Gate D = Drain
S = Source TAB = Drain

Features
- Ultra-low On Resistance
- Unclamped Inductive Switching (UIS) rated
- Low package inductance
  - easy to drive and to protect
- 175 °C Operating Temperature

Advantages
- Easy to mount
- Space savings
- High power density

Applications
- Automotive
  - Motor Drives
  - 42V Power Bus
  - ABS Systems
- DC/DC Converters and Off-line UPS
- Primary Switch for 24V and 48V Systems
- High Current Switching Applications

© 2007 IXYS CORPORATION, All rights reserved

Symbol	Test Conditions (T_J = 25°C unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS}= 10 V; I_D = 0.5 I_{D25}, Note 1	38	64		S
C_{iss}			3100		pF
C_{oss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		520		pF
C_{rss}			125		pF
$t_{d(on)}$	Resistive Switching Times		20		ns
t_r	V_{GS} = 10 V, V_{DS} = 0.5 V_{DSS}, I_D = 25 A		42		ns
$t_{d(off)}$	R_G = 5 Ω (External)		42		ns
t_f			27		ns
$Q_{g(on)}$			68		nC
Q_{gs}	V_{GS}= 10 V, V_{DS} = 0.5 V_{DSS}, I_D = 25 A		18		nC
Q_{gd}			15		nC
R_{thJC}				0.65	°C/W
R_{thCS}			0.50		°C/W

Source-Drain Diode


Symbol	Test Conditions (T_J = 25°C unless otherwise specified) Characteristic Values	Min.	Typ.	Max.	
I_S	V_{GS} = 0 V			98	A
I_{SM}	Repetitive			280	A
V_{SD}	I_F = I_S, V_{GS} = 0 V, Note 1			1.5	V
t_{rr}	I_F = 49 A, -di/dt = 100 A/µs V_R = 40 V, V_{GS} = 0 V		50		ns

Note 1. Pulse test, t ≤ 300 µs, duty cycle, d ≤ 2 %;
2. On through-hole packages, $R_{DS(on)}$ Kelvin test contact location is 5 mm or less from the package body.

ADVANCE TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.


TO-263 (IXTA) Outline

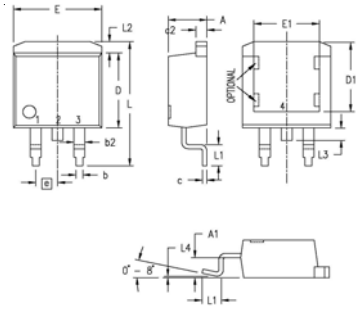

Pins: 1 - Gate 2 - Drain
3 - Source 4, TAB - Drain

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.06	4.83	.160	.190
A1	2.03	2.79	.080	.110
b	0.51	0.99	.020	.039
b2	1.14	1.40	.045	.055
c	0.46	0.74	.018	.029
c2	1.14	1.40	.045	.055
D	8.64	9.65	.340	.380
D1	7.11	8.13	.280	.320
E	9.65	10.29	.380	.405
E1	6.86	8.13	.270	.320
e	2.54	BSC	.100	BSC
L	14.61	15.88	.575	.625
L1	2.29	2.79	.090	.110
L2	1.02	1.40	.040	.055
L3	1.27	1.78	.050	.070
L4	0	0.38	0	.015
R	0.46	0.74	.018	.029

TO-220 (IXTP) Outline

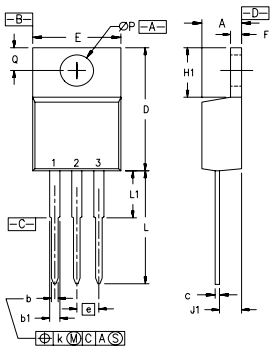

Pins: 1 - Gate 2 - Drain
3 - Source 4, TAB - Drain

SYM	INCHES MIN	MAX	MILLIMETERS MIN	MAX
A	.170	.190	4.32	4.83
b	.025	.040	0.64	1.02
b1	.045	.065	1.15	1.65
c	.014	.022	0.35	0.56
D	.580	.630	14.73	16.00
E	.390	.420	9.91	10.66
e	.100 BSC		2.54 BSC	
F	.045	.055	1.14	1.40
H1	.230	.270	5.85	6.85
J1	.090	.110	2.29	2.79
k	0	.015	0	0.38
L	.500	.550	12.70	13.97
L1	.110	.230	2.79	5.84
ØP	.139	.161	3.53	4.08
Q	.100	.125	2.54	3.18

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or moreof the following U.S. patents: 4,835,592 4,850,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.