




REVISION HISTORY				
ECO	REV	DESCRIPTION	APPR	DATE
-	2	PRODUCTION FAB	J. DREW	06-15-10

LAYER STRUCTURE

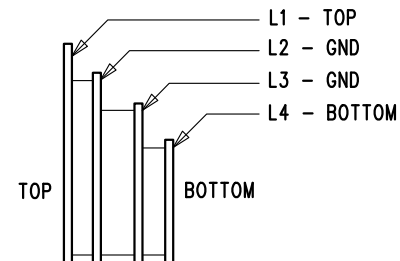

NOTES: UNLESS OTHERWISE SPECIFIED

- FAB PER IPC-A-600.
- MATERIAL: -EPOXY FIBERGLASS, NEMA GRADE FR-4
-FINISHED THICKNESS TO BE 0.062" +/- .005"
-TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE OUTER LAYERS AND 1 OZ. CU ON THE INNER LAYERS.
-FLAMMABILITY RATING: 94 V-0 MINIMUM.
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00 ARE PRIMARY DATUMS.
- DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
-ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
-HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
- FINISH: -SMOBC USING LPI BOTH SIDES, COLOR GREEN.
-GOLD IMMERSION BOTH SIDES.
(LEAD FREE SOLDER CAN BE USED FOR PROTOTYPE)
-FOR SILKSCREEN: BOTH SIDES USE WHITE NON-CONDUCTIVE INK.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
- PCBS ARE TO BE RoHS COMPLIANT.
- DO NOT ALTER SOLDER MASK MAINTAIN .0018" OVERSIZE ON SMT PADS. A .005" WEBBING IS REQUIRED BETWEEN SMD PADS.
- SCORING FOR PANELIZED PCB: "PRODUCTION FAB ONLY"

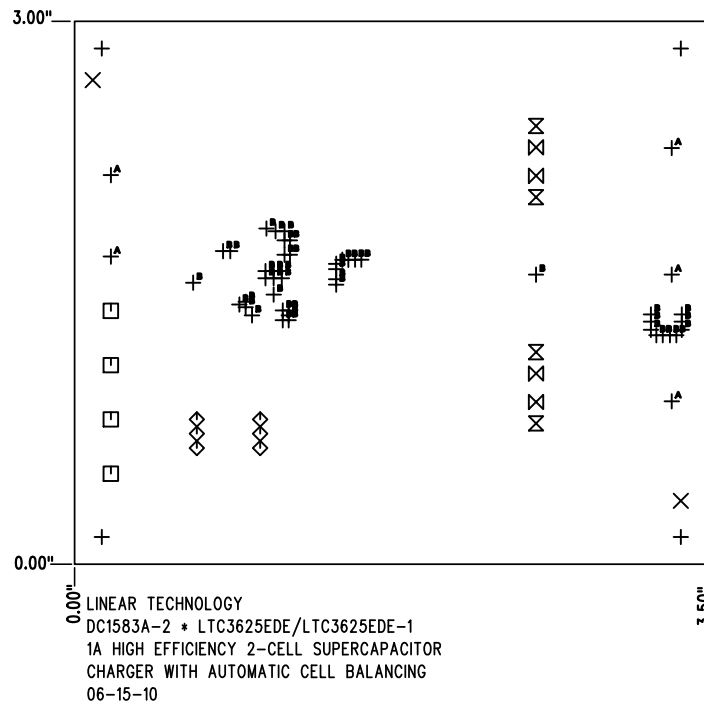

SIZE	QTY	SYM	PLATED	TOL
0.188	4	+	NO	+/-0.003
0.07	2	X	NO	+/-0.003
0.063	4	□	YES	+/-0.003
0.031	6	◇	YES	+/-0.003
0.08268	4	⊗	YES	+/-0.003
0.03937	4	⊗	YES	+/-0.003
0.094	5	⊕ ^A	YES	+/-0.003
0.01	45	⊕ ^B	YES	+/-0.003

10. USE 8888 BOTTOM SILKSCREEN FOR SERIALIZATION

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON ANGLE ±1 0.XX" = ±0.01" 0.XXX" = ±0.005" INTERPRET DIM AND TOL PER ASME Y14.5M-1994	APPROVALS		<p>1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 www.Linear.com LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY</p>
	PCB DES.	NC	
THIRD ANGLE PROJECTION	APP ENG.	J. DREW	TITLE: FABRICATION DRAWING: 1A HIGH EFFICIENCY 2-CELL SUPERCAPACITOR CHARGER WITH AUTOMATIC CELL BALANCING SIZE N/A IC NO. LTC3625EDE/LTC3625EDE-1 REV. 2 DEMO CIRCUIT 1583A-A/B
	DATE	06-15-10	
DO NOT SCALE DRAWING	SCALE:	NONE	FILENAME: DC1583A-2.PCB SHT 1 of 1