



| SIZE | QTY | SYM | PLTD  |
|------|-----|-----|-------|
| 95   | 5   | +   | PLTD  |
| 35   | 2   | ×   | PLTD  |
| 72   | 2   | □   | NPLTD |
| 15   | 26  | ◇   | PLTD  |

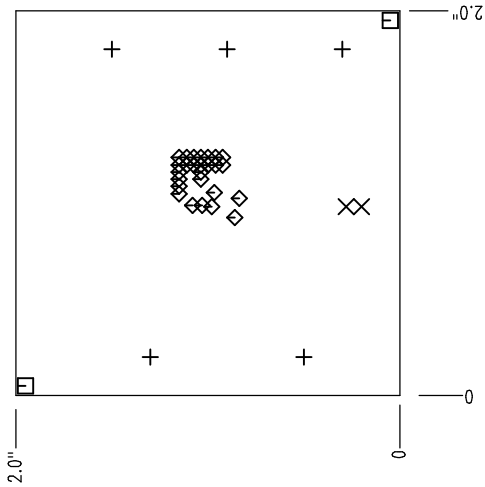

### NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4, 2 OZ. COPPER  
THICKNESS .062 +/- .006 TOTAL OF 2 LAYERS.  
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH  
HOLES WITH COPPER, .001 INCH THICK MIN. ALL  
HOLE SIZES ARE SPECIFIED AFTER PLATING.  
HOLE LOCATION TOLERANCES ARE +/- .003  
INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE EXCEPT IN THE AREA AS SHOWN.
7. SCORING:

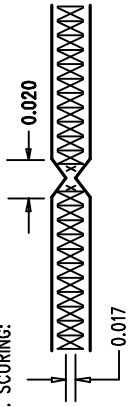

### FAB DRAWING

|                  |         |                          |  |  |        |
|------------------|---------|--------------------------|--|--|--------|
| <b>APPROVALS</b> |         | <b>LINEAR TECHNOLOGY</b> |  | 1630 McCarthy Blvd.<br>Milpitas, CA 95035<br>PH: (408)432-1900 |        |
| DRAWN            | INIT    | DATE                     |  |  |        |
| CHECK            |         |                          |  |  |        |
| DESIGN           | JUNE WU | 9/26/00                  |  |  |        |
| ENGR             | FRAN H. | 9/29/00                  |  |  |        |
|                  |         |                          | TITLE: LTC1734ES6 Li-Ion Battery Charger |  |        |
| SIZE             | A       | DEMO                     | DC370A                                   | LTC1734ES6   | REV. A |
| SCALE = NONE     |         |                          | DES-230410                               |  |        |
|                  |         |                          | SHT 1 of 1                               |  |        |