



PF3000

PF Series 12-Channel Configurable PMIC

Overview


The PF3000 power management integrated circuit (PMIC) features a configurable architecture that supports numerous outputs with various current ratings as well as programmable voltage and sequencing. This enables the PF3000 to power the core processor, external memory and peripherals to provide a single-chip system power solution in multiple applications, reducing design complexity and lowering overall bill of materials. The high-performance architecture offers improved efficiency across the complete output range and delivers advanced functionality for consumer and industrial applications.

The PF3000 is ideally suited for i.MX 7 series application processors. It also meets the power consumption requirements for all low end i.MX 6 series, including the i.MX 6UltraLite, i.MX 6Solo, i.MX 6SoloLite, and the i.MX 6SoloX. Our compatibility with i.MX applications processors is shown in multiple reference designs included within the Board Support Package (BSP) and facilitates software controlled, dynamic voltage scaling. This provides customers with a platform-level solution from a single supplier to enable faster time to market and reduce engineering effort.

Target Applications

- eReaders
- Navigation
- Human-machine interface
- Home automation
- Industrial embedded board manufacturer
- Point of sale (POS) terminals
- Wearables
- Internet of Things (IoT)
- Portable medical

PF3000 Functional Internal Block Diagram

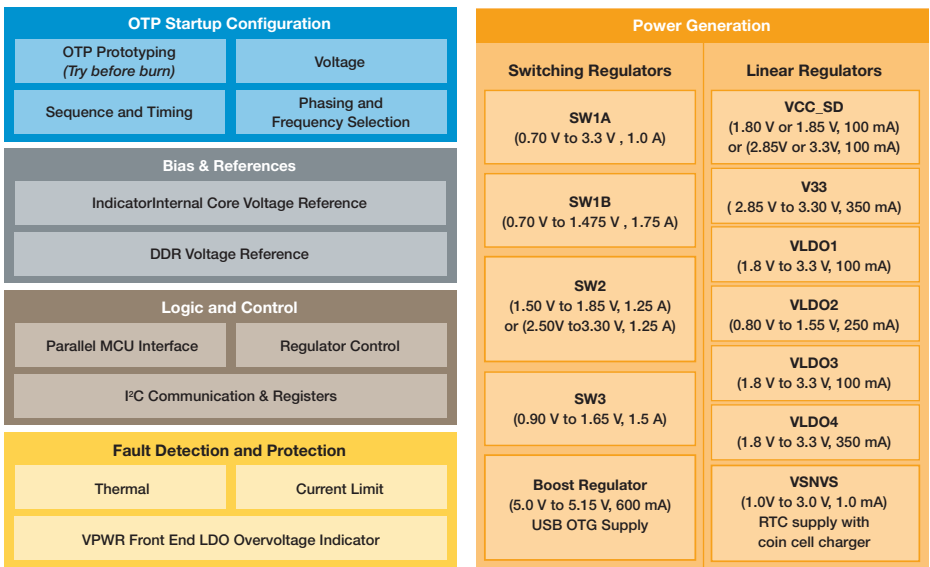

Product Differentiation

	Features	Benefits
Efficiency	4 Buck Converters	High efficiency (>90%), lower power dissipation
	6 LDOs, integrated boost regulator for USB + coin cell charger, RTC supply	Supply multiple peripherals, lowering external component count
	Forced PFM (Pulse Frequency Modulation), APS (Auto Pulse Skip) or PWM operation	Higher light load efficiency – longer battery standby time
Simplify	Programmable output voltage, sequence, timing	Ensure scalability across platforms (multiple i.MX applications processors usage)
	Quick turn customization (OTP configuration)	Try before buy option, faster time to market
	5 V voltage input compatibility	Simplify bill of materials by alleviating the need for a 5 V to 4.5 V converter
	I ² C digital interface for programmability	On the fly voltage scaling for better system efficiency, regulator management for versatility
Low-Cost	Preprogrammed versions, optimized for dedicated i.MX applications processors versions	Reduces design efforts since the PMICs are designed for compatibility with the i.MX applications processors
	7 x 7 mm QFN power package	Allows 4 layer printed circuit boards (PCBs)

Features

- 2.8 V to 5.5 V input voltage
- 12-channel, 7.2 A total power delivery
- 4-channel configurable buck converters
- Forced PWM/PFM or APS operation
- 6 user programmable LDOs
- Boost regulator to 5.0 V out for USB, coin cell charger, DDR reference
- Programmable output voltage, current limit, soft-start, FSW, OTP fault interrupt
- High power 7 x 7 mm QFN package
- Consumer, industrial grades available

PF3000 PMIC Enablement

KITPF3000FRDMEVM
KITPF3000FRDMPGM

- Generic family evaluation and programming platform
- Friendly graphical user interface
- USB interface

Complete Technical Documentation Available


- Datasheet, application notes, EVM user guide

Easy to Use Tools

- GUI and evaluation systems available to test efficiency and temperature rise
- Technical and hands-on training available upon request

Product Core	Market	Ambient Temperature
MC32PF3000	Consumer	-40C° to +85C°
MC34PF3000	Industrial	-40C° to +105C°

Freescal Document Number	Title	Description
PF3000	PF3000	Data Sheet
SG1002	Analog Product Selector Guide	Selector Guide
SG200	Industrial Product Selector Guide	Selector Guide

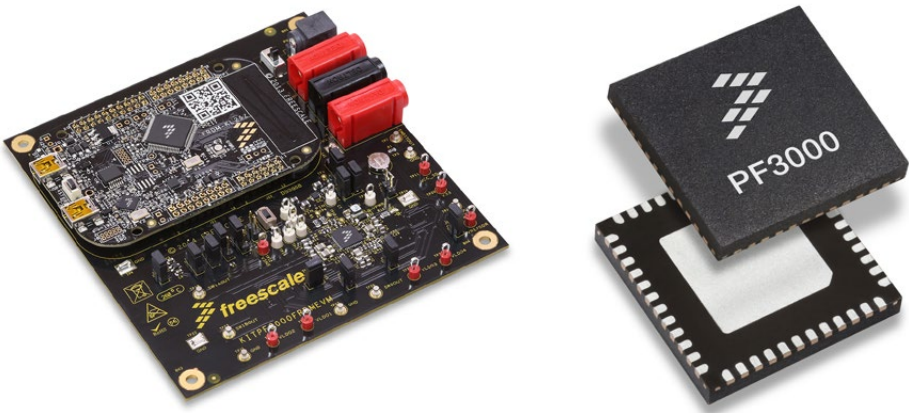

For more information visit freescale.com/PMIC

Freescal and the Freescal logo are trademarks of Freescal Semiconductor, Inc., Reg. U.S. Pat. & Tm. Off. All other product or service names are the property of their respective owners. © 2015 Freescal Semiconductor, Inc.

Document Number: PF3000FS REV 2