STGWT15H60F

Trench gate field-stop IGBT, H series 600 V, 15 A high speed

Datasheet - production data


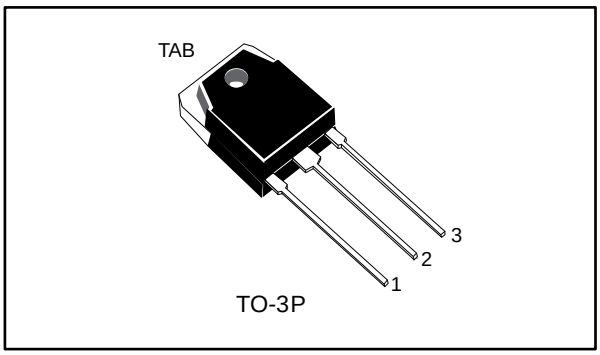


Figure 1: Internal schematic diagram

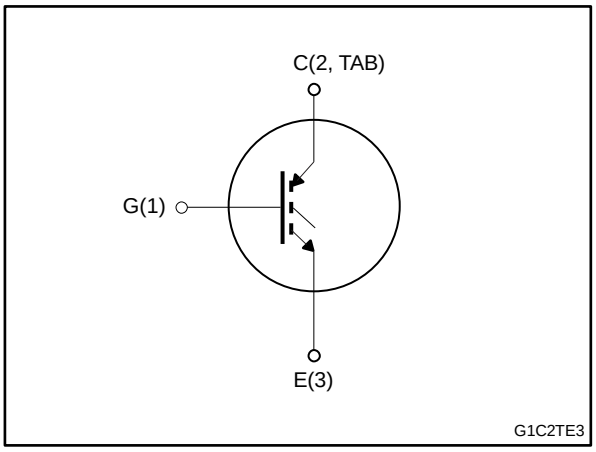

Features

- High speed switching
- Tight parameter distribution
- Safe paralleling
- Low thermal resistance
- Short-circuit rated

Applications

- Motor control
- UPS
- PFC

Description

This device is an IGBT developed using an advanced proprietary trench gate field-stop structure. The device is part of the H series of IGBTs, which represents an optimum compromise between conduction and switching losses to maximize the efficiency of high switching frequency converters. Furthermore, a slightly positive $V_{CE(sat)}$ temperature coefficient and very tight parameter distribution result in safer paralleling operation.

Table 1: Device summary

Order code	Marking	Package	Packing
STGWT15H60F	G15H60F	TO-3P	Tube

This is information on a product in full production.

www.st.com

Contents

1 Electrical ratings 3
2 Electrical characteristics 4
2.1 Electrical characteristics (curves) 6
3 Test circuits 10
4 Package information 11
4.1 TO-3P package information 12
5 Revision history 14

1 Electrical ratings

Table 2: Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{CES}	Collector-emitter voltage (V_{GE} = 0 V)	600	V
I_C	Continuous collector current at T_C = 25 °C	30	A
	Continuous collector current at T_C = 100 °C	15	
I_{CP}(1)	Pulsed collector current	60	A
V_{GE}	Gate-emitter voltage	±20	V
P_{TOT}	Total dissipation at T_C = 25 °C	115	W
T_{STG}	Storage temperature range	-55 to 150	°C
T_J	Operating junction temperature range	-55 to 175	°C

Notes:

(1)Pulse width is limited by maximum junction temperature.

Table 3: Thermal data

Symbol	Parameter	Value	Unit
R_{thJC}	Thermal resistance junction-case	1.3	°C/W
R_{thJA}	Thermal resistance junction-ambient	50	°C/W

2 Electrical characteristics

T_J = 25 °C unless otherwise specified

Table 4: Static characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)CES}$	Collector-emitter breakdown voltage	V_{GE} = 0 V, I_C = 2 mA	600			V
$V_{CE(sat)}$	Collector-emitter saturation voltage	V_{GE} = 15 V, I_C = 15 A		1.6	2	V
		V_{GE} = 15 V, I_C = 15 A, T_J = 125 °C		1.7		
		V_{GE} = 15 V, I_C = 15 A, T_J = 175 °C		1.8		
$V_{GE(th)}$	Gate threshold voltage	V_{CE} = V_{GE}, I_C = 1 mA	5	6	7	V
I_{CES}	Collector cut-off current	V_{GE} = 0 V, V_{CE} = 600 V			25	µA
I_{GES}	Gate-emitter leakage current	V_{CE} = 0 V, V_{GE} = ±20 V			±250	nA

Table 5: Dynamic characteristics

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{ies}	Input capacitance	V_{CE} = 25 V, f = 1 MHz, V_{GE} = 0 V	-	1952	-	pF
C_{oes}	Output capacitance		-	78	-	pF
C_{res}	Reverse transfer capacitance		-	45	-	pF
Q_g	Total gate charge	V_{CC} = 480 V, I_C = 15 A, V_{GE} = 0 to 15 V (see *Figure 24: "Gate charge test circuit"*)	-	81	-	nC
Q_{ge}	Gate-emitter charge		-	8	-	nC
Q_{gc}	Gate-collector charge		-	42	-	nC

Table 6: Switching characteristics (inductive load)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	V_{CE} = 400 V, I_C = 15 A, V_{GE} = 15 V, R_G = 10 Ω		24.5	-	ns
t_r	Current rise time			8.2	-	ns
(di/dt)on	Turn-on current slope			1470	-	A/µs
$t_{d(on)}$	Turn-on delay time	V_{CE} = 400 V, I_C = 15 A, V_{GE} = 15 V, R_G = 10 Ω, T_J = 175 °C (see *Figure 23: "Test circuit for inductive load switching"*)		25	-	ns
t_r	Current rise time			9	-	ns
(di/dt)on	Turn-on current slope			1370	-	A/µs
$t_{r(Voff)}$	Off voltage rise time	V_{CE} = 400 V, I_C = 15 A, V_{GE} = 15 V, R_G = 10 Ω,		18	-	ns
$t_{d(off)}$	Turn-off delay time			118	-	ns
t_f	Current fall time			69	-	ns
$t_{r(Voff)}$	Off voltage rise time	V_{CE} = 400 V, I_C = 15 A, V_{GE} = 15 V, R_G = 10 Ω, T_J = 175 °C (see *Figure 23: "Test circuit for inductive load switching"*)		27	-	ns
$t_{d(off)}$	Turn-off delay time			124	-	ns
t_f	Current fall time			101	-	ns
t_{sc}	Short-circuit withstand time	V_{CC} ≤ 360 V, V_{GE} = 15 V, R_G = 10 Ω	3	5	-	µs

Table 7: Switching energy (inductive load)

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
E_{on} (1)	Turn-on switching energy	V_{CE} = 400 V, I_C = 15 A, R_G = 10 Ω, V_{GE} = 15 V	-	136	-	µJ
E_{off} (2)	Turn-off switching energy		-	207	-	µJ
E_{ts}	Total switching energy		-	343	-	µJ
E_{on} (1)	Turn-on switching energy	V_{CE} = 400 V, I_C = 15 A, R_G = 10 Ω, V_{GE} = 15 V, T_J = 175 °C	-	224	-	µJ
E_{off} (2)	Turn-off switching energy		-	329	-	µJ
E_{ts}	Total switching energy		-	553	-	µJ

Notes:

(1)Including the reverse recovery of the external diode. The diode is the same of the co-packed STGP15H60DF.

(2)Including the tail of the collector current.

2.1 Electrical characteristics (curves)

Figure 2: Power dissipation vs. case temperature

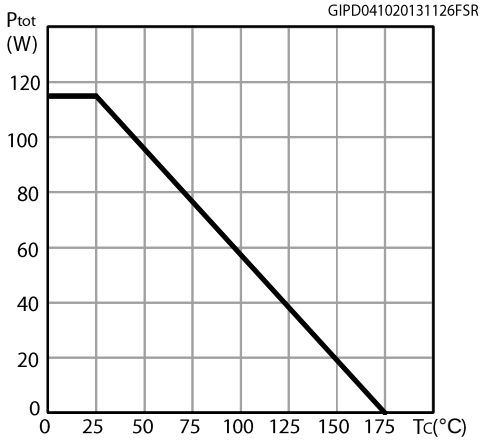


Figure 3: Collector current vs. case temperature

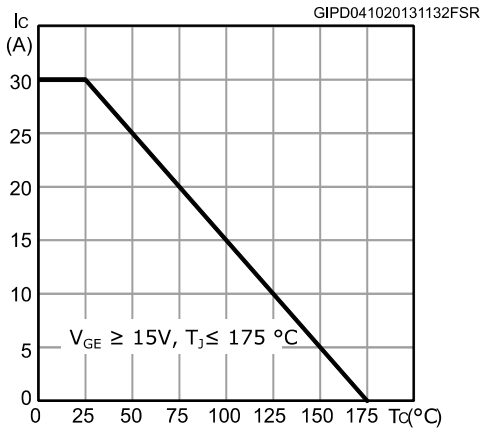


Figure 4: Output characteristics (T_J = 25°C)

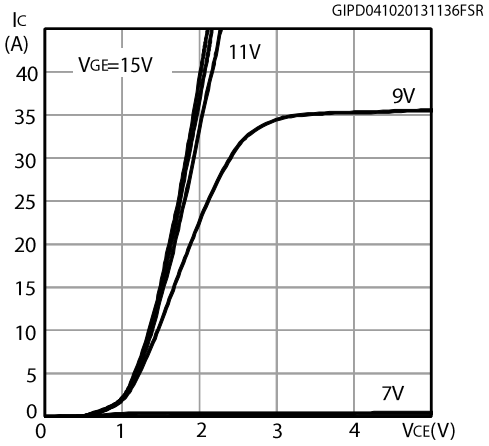


Figure 5: Output characteristics (T_J = 175°C)

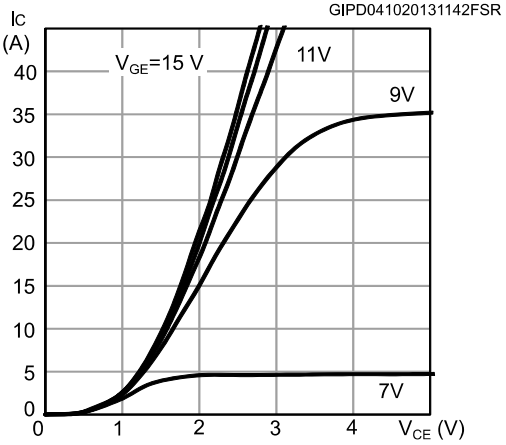


Figure 6: $V_{CE(sat)}$ vs. junction temperature

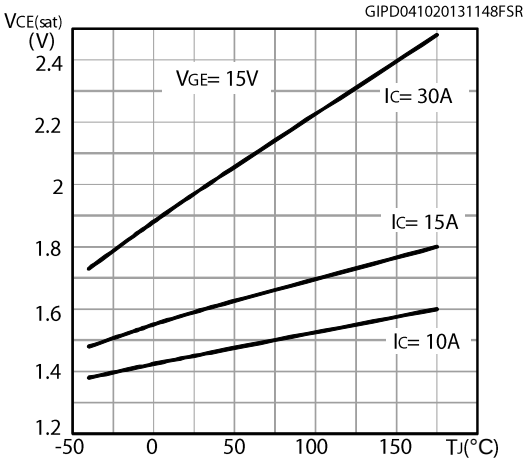


Figure 7: $V_{CE(sat)}$ vs. collector current

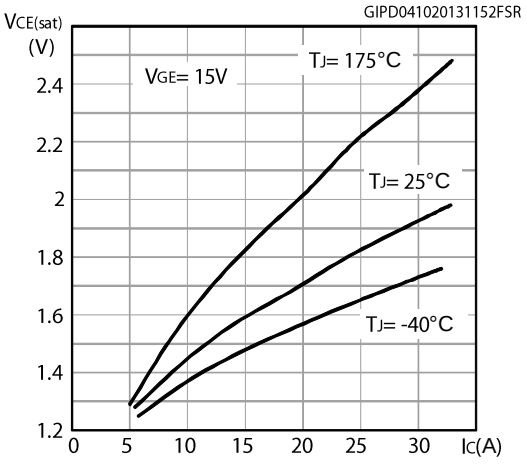


Figure 8: Collector current vs. switching frequency

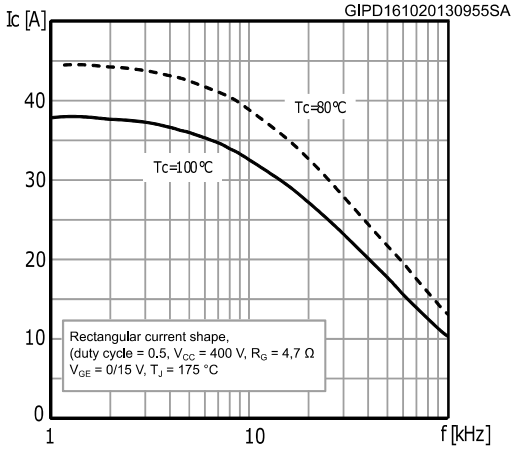


Figure 9: Forward bias safe operating area

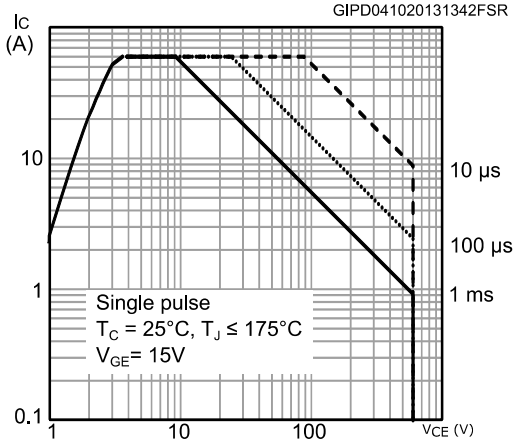


Figure 10: Transfer characteristics

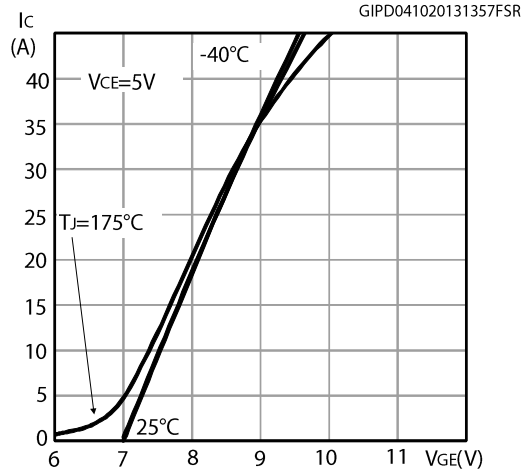


Figure 11: Normalized $V_{GE(th)}$ vs junction temperature

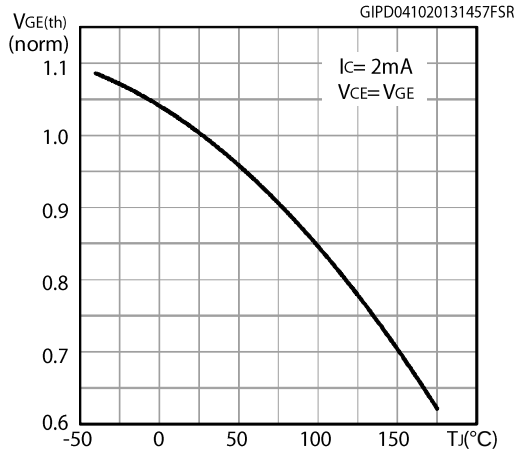


Figure 12: Normalized $V_{(BR)CES}$ vs. junction temperature

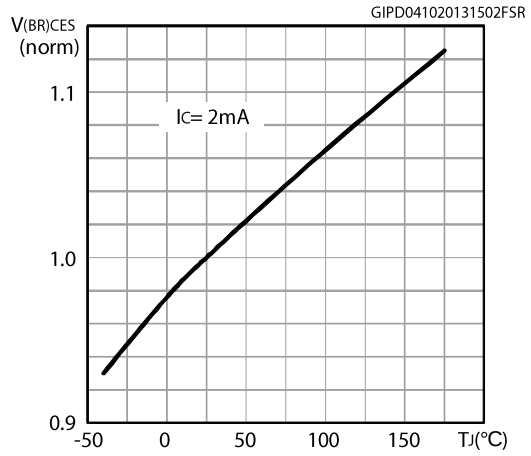


Figure 13: Capacitance variation

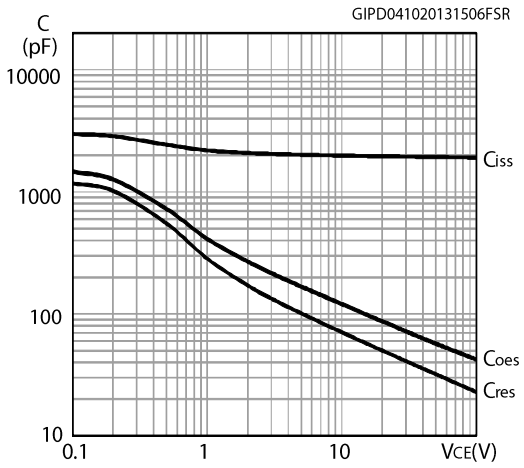


Figure 14: Gate charge vs. gate-emitter voltage

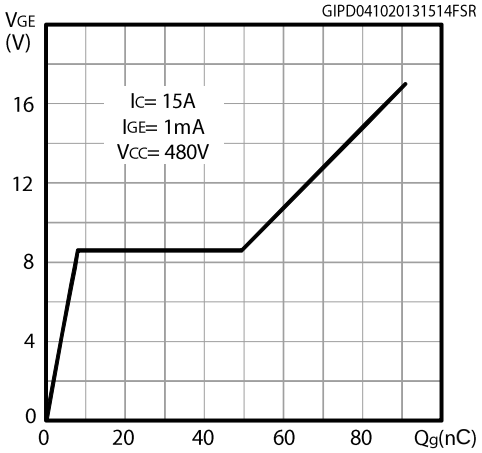


Figure 15: Switching energy vs collector current

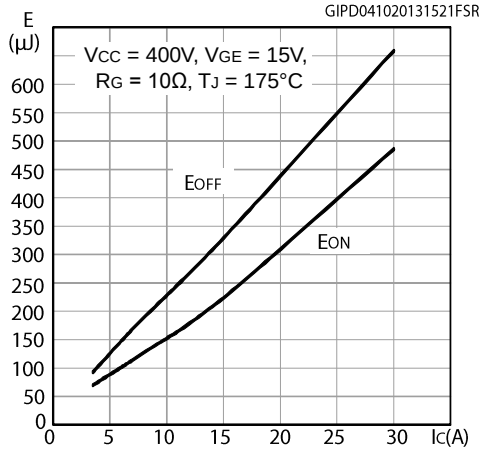


Figure 16: Switching energy vs gate resistance

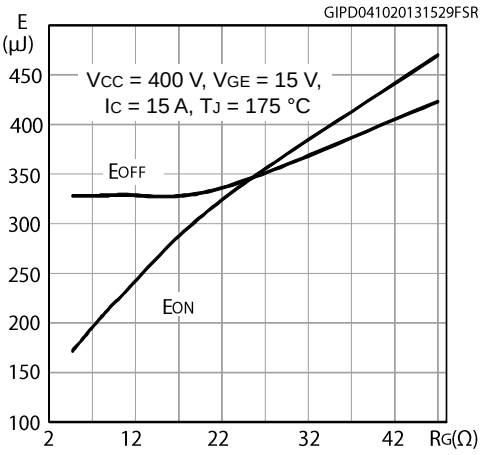


Figure 17: Switching energy vs temperature

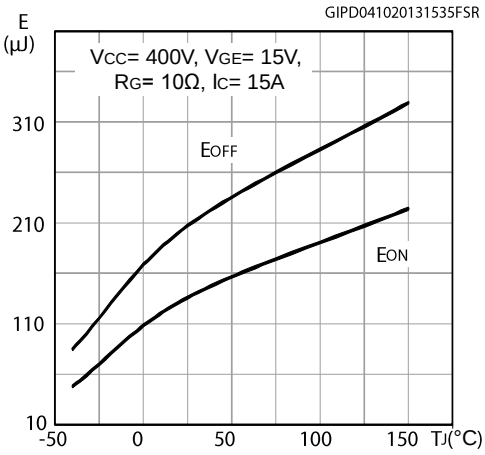


Figure 18: Switching energy vs collector-emitter voltage

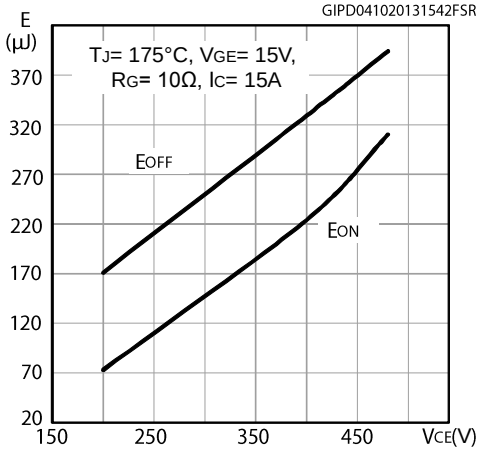


Figure 19: Short circuit time and current vs V_{GE}

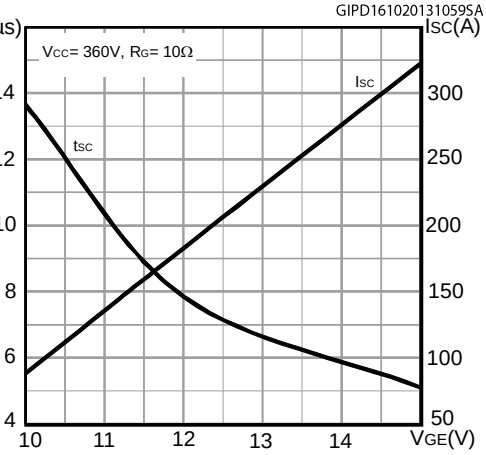


Figure 20: Switching times vs. collector current

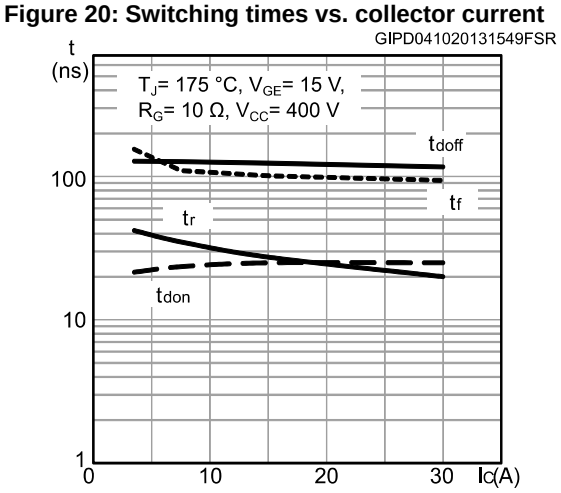


Figure 21: Switching times vs. gate resistance


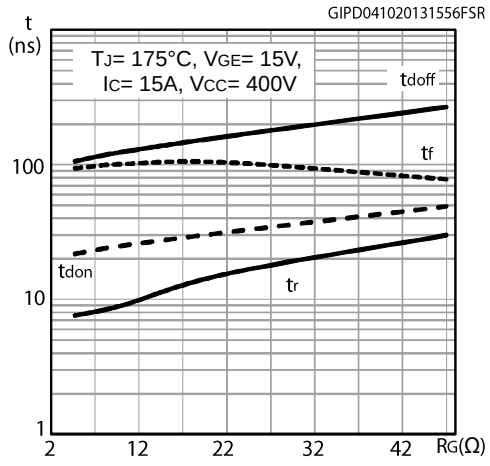


Figure 22: Thermal impedance

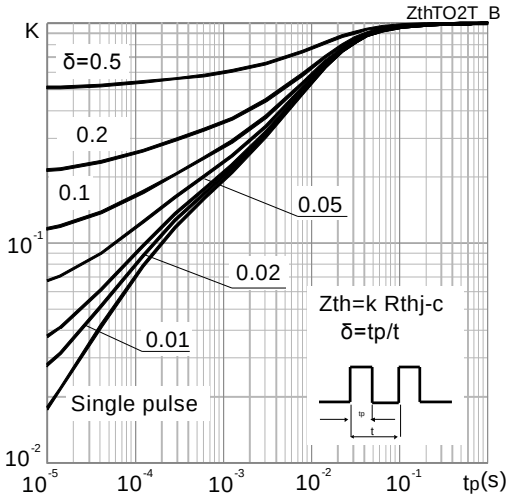

3 Test circuits

Figure 23: Test circuit for inductive load switching

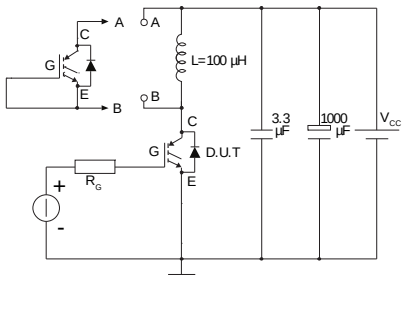


Figure 24: Gate charge test circuit


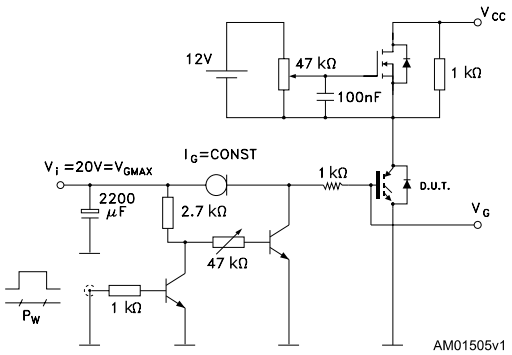


Figure 25: Switching waveform

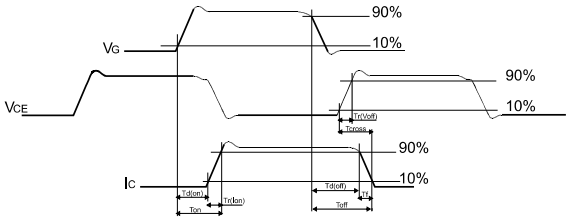

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: ***www.st.com***. ECOPACK® is an ST trademark.

4.1 TO-3P package information

Figure 26: TO-3P package outline

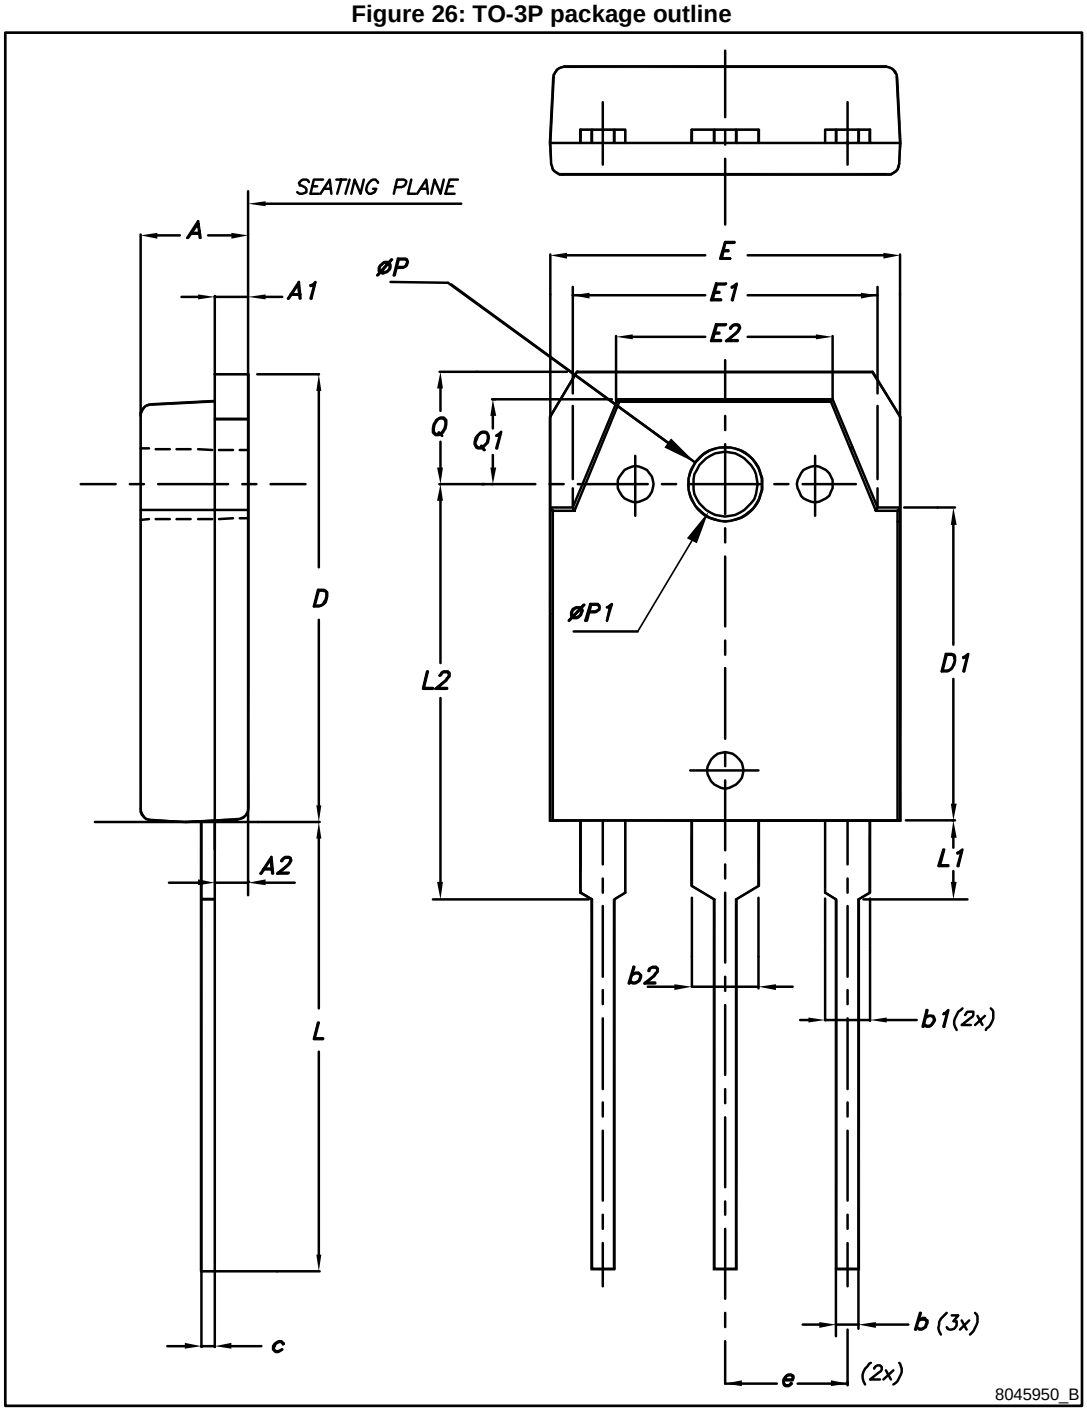


Table 8: TO-3P package mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	4.60	4.80	5.00
A1	1.45	1.50	1.65
A2	1.20	1.40	1.60
b	0.80	1.00	1.20
b1	1.80	2.00	2.20
b2	2.80	3.00	3.20
c	0.55	0.60	0.75
D	19.70	19.90	20.10
D1	13.70	13.90	14.10
E	15.40	15.60	15.80
E1	13.40	13.60	13.80
E2	9.40	9.60	9.90
e	5.15	5.45	5.75
L	19.80	20.00	20.20
L1	3.30	3.50	3.70
L2	18.20	18.40	18.60
ØP	3.30	3.40	3.50
ØP1	3.10	3.20	3.30
Q	4.80	5.00	5.20
Q1	3.60	3.80	4

5 Revision history

Table 9: Document revision history

Date	Revision	Changes
10-Feb-2017	1	First release

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2017 STMicroelectronics – All rights reserved