
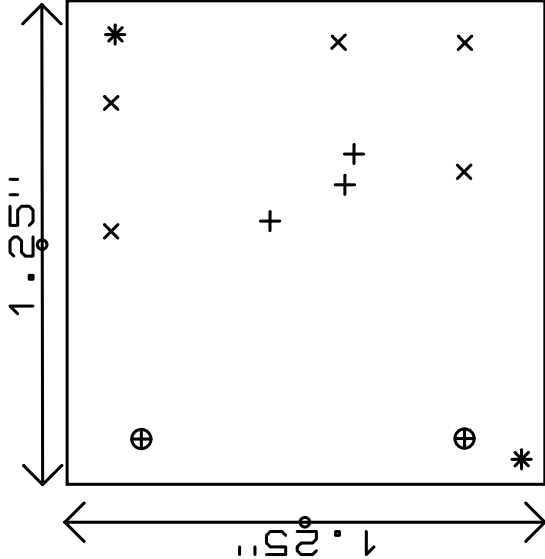


REVISION HISTORY			
ECO	REV	DESCRIPTION	APP. ENG.
	1	PRODUCTION	CUYLER L.
			DATE
			10/01/2010


NOTES: UNLESS OTHERWISE SPECIFIED

1. FAB PER IPC-A-600
2. MATERIAL: -EPOXY FIBERGLASS, NEMA GRADE FR-4
 -FINISHED THICKNESS 0.062 +/-0.005"
 -TOTAL 2 LAYERS, 2 OZ. CU
 -FLAMMABILITY RATING: 94 V-0 MIN.
- 3.SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
 -ALL HOLE SIZES ARE SPECIFIED AFTER PLATING
 -HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
5. FINISH: -SMOBC USING LPI BOTH SIDES, COLOR GREEN
 -GOLD IMMERSION BOTH SIDES
 -SILKSCREEN TOP SIDE USE WHITE NON-CONDUCTIVE INK
6. PCBs ARE TO BE RoHS COMPLIANT
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE. PAD SIZE CAN BE MODIFIED TO MEET END FINISH
8. SCORING FOR PANELIZED PCB:



SIZE	QTY	SYM	PLATED	TOL
0.020"	3	+	YES	+/-0.003"
0.064"	5	X	YES	+/-0.003"
0.070"	2	*	NO	+/-0.003"
0.094"	2	⊕	YES	+/-0.003"

LAYER CONSTRUCTION

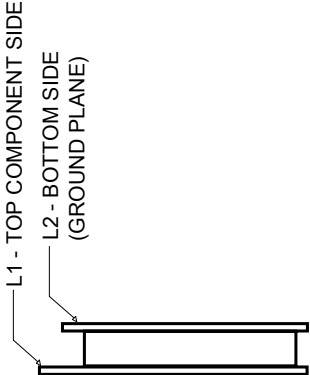

UNLESS OTHERWISE SPECIFIED		APPROVALS	
DIMENSIONS ARE IN INCHES		PCB DES.	CL
TOLERANCES:		APP ENG	CUYLER L.
0.XX" = +/-0.01"			
0.XXX" = +/-0.005"			
THIRD ANGLE PROJECTION			

1630 McCarthy Blvd.
Milpitas, CA 95035
PH: (408) 432-1900
www.linear.com

LTC CONFIDENTIAL FOR CUSTOMER USE ONLY

TITLE: PCB FABRICATION DRAWING, HIGH VOLTAGE BI-DIRECTIONAL CURRENT SENSE			
SIZE	IC NO	LT1999IMS8-10/-20/-50 DEMO CIRCUIT 1698A	REV 1
FILENAME: 1698A-1.LYT			SH 1 OF 1



SCALE = NONE