

CoolMOS™ [1] Power MOSFET

V_{DSS} = 600 V
I_{D25} = 47 A
$R_{DS(on)\ max}$ = 45 mΩ

Electrically isolated back surface
2500 V electrical isolation
N-Channel Enhancement Mode
Low R_{DSon}, high V_{DSS} MOSFET
Ultra low gate charge



ISOPLUS247™

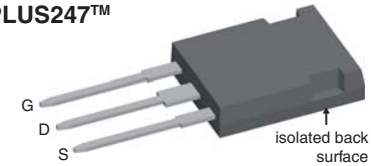

E72873

MOSFET				
Symbol	**Conditions**		**Maximum Ratings**	
V_{DSS}	T_{VJ} = 25°C		600	V
V_{GS}			± 20	V
I_{D25}	T_C = 25°C		47	A
I_{D90}	T_C = 90°C		32	A
E_{AS}	single pulse	I_D = 11 A; T_C = 25°C	1950	mJ
E_{AR}	repetitive	I_D = 11 A; T_C = 25°C	3	mJ
dV/dt	MOSFET dV/dt ruggedness V_{DS} = 0...480 V		50	V/ns

Symbol	wiConditions		Characteristic Values (T_{VJ} = 25°C, unless otherwise specified) min.	typ.	max.	
R_{DSon}	V_{GS} = 10 V; I_D = 44 A			40	45	mΩ
$V_{GS(th)}$	V_{DS} = V_{GS}; I_D = 3 mA		2.5	3	3.5	V
I_{DSS}	V_{DS} = V_{DSS}; V_{GS} = 0 V	T_{VJ} = 25°C			10	µA
		T_{VJ} = 150°C		50		µA
I_{GSS}	V_{GS} = ± 20 V; V_{DS} = 0 V				100	nA
C_{iss}	V_{GS} = 0 V; V_{DS} = 100 V			6800		pF
C_{oss}	f = 1 MHz			320		pF
Q_g	V_{GS} = 0 to 10 V; V_{DS} = 400 V; I_D = 44 A			150	190	nC
Q_{gs}				35		nC
Q_{gd}				50		nC
$t_{d(on)}$	V_{GS} = 10 V; V_{DS} = 400 V; I_D = 44 A; R_G = 3.3 Ω			30		ns
t_r				20		ns
$t_{d(off)}$				100		ns
t_f				10		ns
R_{thJC}					0.45	K/W
R_{thCH}	with heatsink compound			0.25		K/W

Features

- Silicon chip on Direct-Copper-Bond substrate
  - high power dissipation
  - isolated mounting surface
  - 2500 V electrical isolation
  - low drain to tab capacitance (< 30 pF)
- Fast CoolMOS™ [1] power MOSFET 4th generation
  - high blocking capability
  - lowest resistance
  - avalanche rated for unclamped inductive switching (UIS)
  - low thermal resistance due to reduced chip thickness
- Enhanced total power density

Applications

- Switched mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)
- Power factor correction (PFC)
- Welding
- Inductive heating
- PDP and LCD adapter

Advantages

- Easy assembly: no screws or isolation foils required
- Space savings
- High power density
- High reliability

[1] CoolMOS™ is a trademark of Infineon Technologies AG.

IXYS reserves the right to change limits, test conditions and dimensions.

© 2008 IXYS All rights reserved

Source-Drain Diode

Symbol	Conditions	Characteristic Values (T_{VJ} = 25°C, unless otherwise specified) min.	typ.	max.	
I_S	V_{GS} = 0 V			44	A
V_{SD}	I_F = 44 A; V_{GS} = 0 V		0.9	1.2	V
t_{rr}	I_F = 44 A; -di_F/dt = 100 A/µs; V_R = 400 V		600		ns
Q_{RM}			17		µC
I_{RM}			60		A

Component


Symbol	Conditions	Maximum Ratings	
T_{VJ}	operating	-55...+150	°C
T_{stg}	storage	-55...+150	°C
V_{ISOL}	I_{ISOL} = 1 mA, 50/60 Hz, t = 1 min	2500	V~
F_C	mounting force with clip	20-120	N

Symbol	Conditions	Characteristic Values min.	typ.	max.	
C_P	coupling capacity between shorted pins and mounting tab in the case		30		pF
d_S, d_A	pin - pin	tbd			mm
d_S, d_A	pin - backside metal	tbd			mm
Weight			6		g

IXYS reserves the right to change limits, test conditions and dimensions.

© 2008 IXYS All rights reserved

ISOPLUS247™ Outline

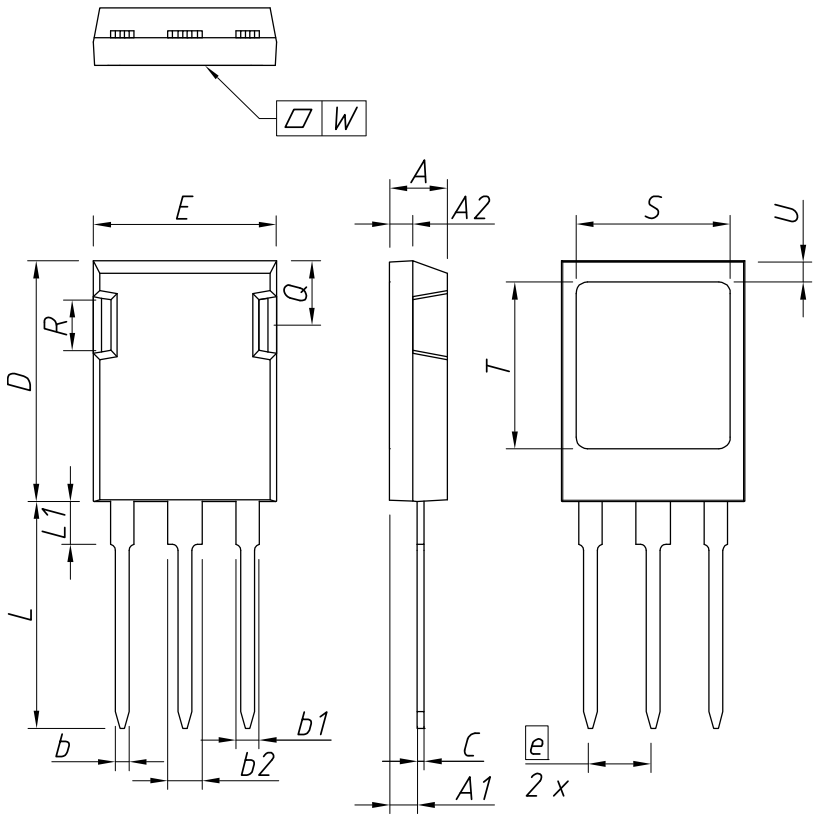

DIM.	MILLIMETER		INCHES	
	MIN	MAX	MIN	MAX
A	4,83	5,21	0,190	0,205
A1	2,29	2,54	0,090	0,100
A2	1,91	2,16	0,075	0,085
b	1,14	1,40	0,045	0,055
b1	1,91	2,15	0,075	0,085
b2	2,92	3,20	0,115	0,126
C	0,61	0,83	0,024	0,033
D	20,80	21,34	0,819	0,840
E	15,75	16,13	0,620	0,635
e	5,45 BSC		0,215 BSC	
L	19,81	20,60	0,780	0,811
L1	3,81	4,38	0,150	0,172
Q	5,59	6,20	0,220	0,244
R	4,32	4,85	0,170	0,191
S	13,21	13,72	0,520	0,540
T	15,75	16,26	0,620	0,640
U	1,65	2,03	0,065	0,080
W	–	0,10	–	0,004

Die konvexe Form des Substrates ist typ. < 0.04 mm über der Kunststofffoberfläche der Bauteilunterseite
The convex bow of substrate is typ. < 0.04 mm over plastic surface level of device bottom side

Die Gehäuseabmessungen entsprechen dem Typ TO-247 AD gemäß JEDEC außer Schraubloch und L_{max}.
This drawing will meet all dimensions requiarement of JEDEC outline TO-247 AD except screw hole and except L_{max}.

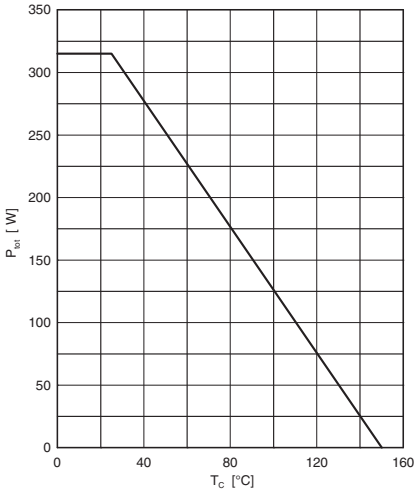


Fig. 1 Typ. power dissipation

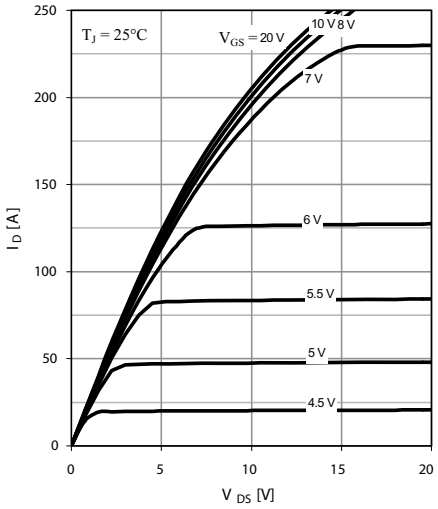


Fig. 2 Typ. output characteristics

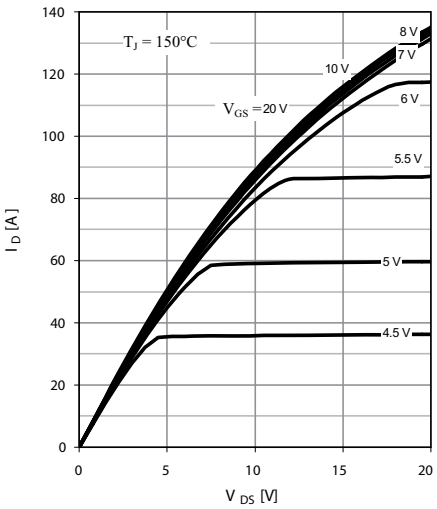


Fig. 3 Typ. output characteristics

© 2008 IXYS All rights reserved

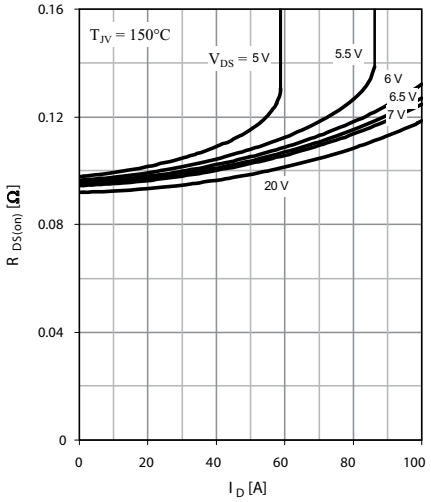


Fig. 4 Typ. drain-source on-state resistance

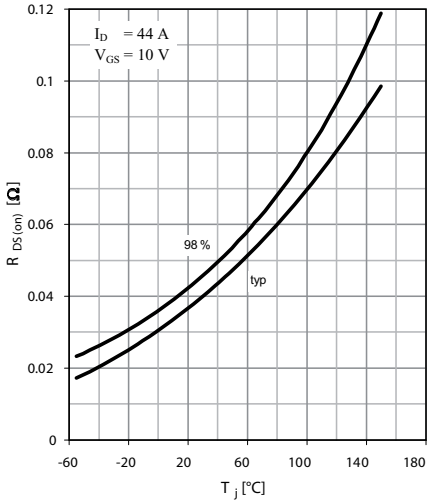


Fig. 5 Drain-source on-state resistance

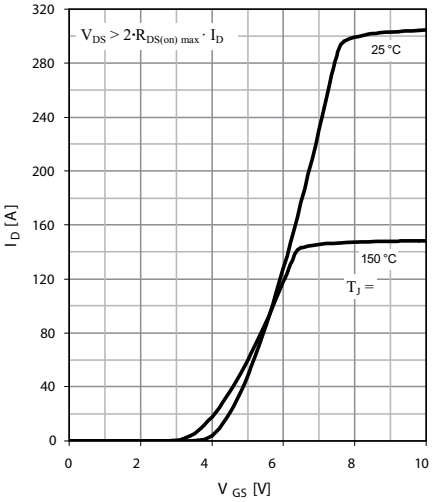


Fig. 6 Typ. transfer characteristics

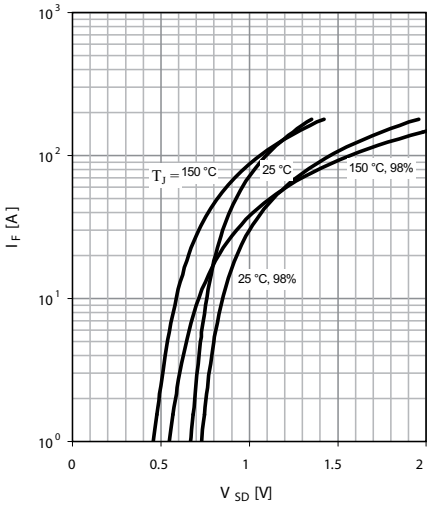


Fig. 7 Forward characteristic of reverse diode

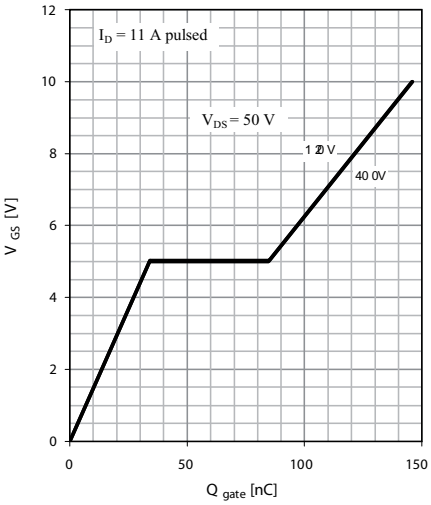


Fig. 8 Typ. gate charge

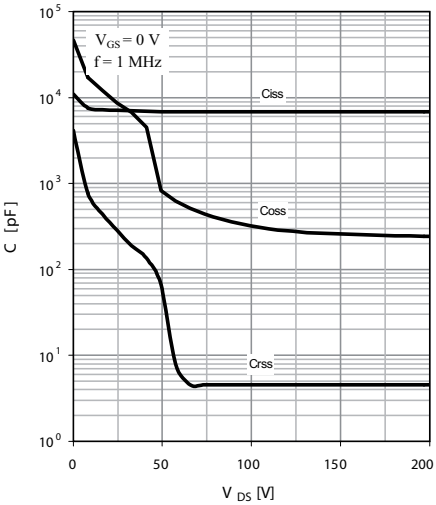


Fig. 9 Typ. capacitances

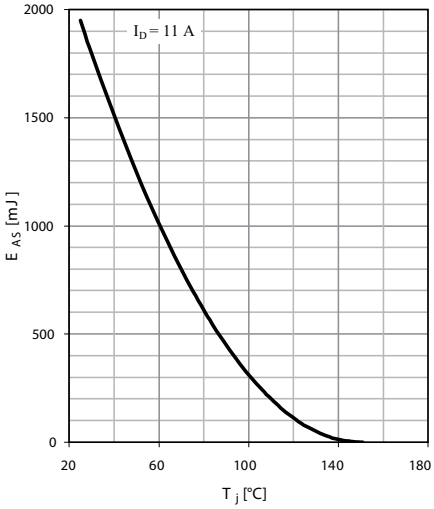


Fig. 9 Avalanche energy

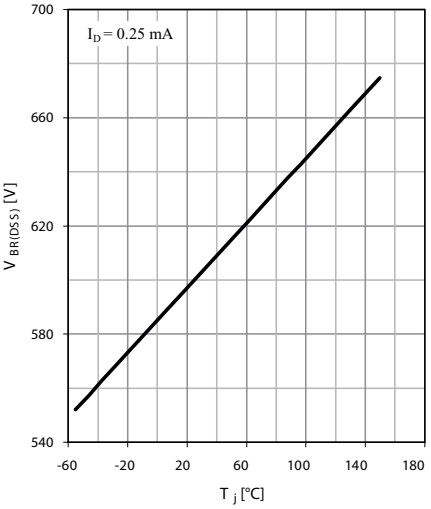


Fig. 10 Drain-source breakdown voltage

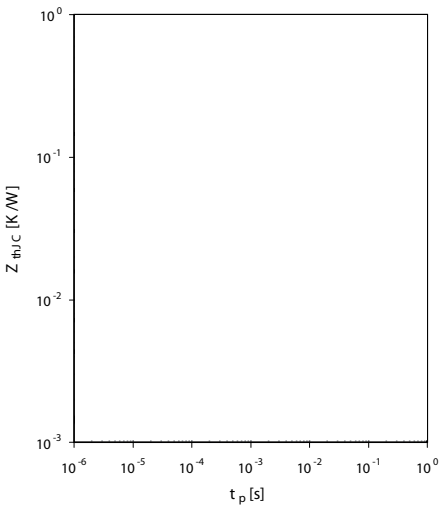


Fig. 12 Max. transient thermal impedance

© 2008 IXYS All rights reserved



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications.Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.