

Maxim > Design Support > Technical Documents > Application Notes > Wireless and RF > APP 957

Keywords: rf, rfic, mixer, gps, downconverter, front end, sige, wireless, satellite, receiver, rf ics, mixer IC, rfics, radio frequency

APPLICATION NOTE 957

The MAX2681 SiGe Downconverter Mixer Tuned for GPS Front Ends

May 01, 2002

Abstract: This application note presents the component values and measured performance for the MAX2681 mixer IC when tuned for GPS operation at 1575MHz. The evaluation kit schematic is provided. Conversion gain is 10.5dB, and the input third order intercept is -0.8dBm.

Additional Information:

- Wireless Product Line Page
- Quick View Data Sheet for the MAX2680/MAX2681/MAX2682
- Applications Technical Support

The MAX2681 is a miniature, low-cost, low-noise downconverter mixer designed for low-voltage, low-current operation, and is ideal for portable communications equipment. The MAX2681 can be used with input radio frequencies (RFs) between 400MHz and 2500MHz, to downconvert to intermediate frequencies (IF) between 10MHz to 500MHz. The input RF for a global positioning system



Click here for an overview of the wireless components used in a typical radio transceiver.

(GPS) receiver is 1575MHz. Assuming a 70MHz IF, and high-side local oscillator (LO) injection ($f_{LO} = 1645$ MHz), the MAX2681 achieves +10.5dB of gain, has a noise figure of 9.6dB, an input third-order intercept point (IIP3) of -0.8dBm and draws 8.8mA of supply current from a +3.0V supply. See **Figure 1** for component values and the schematic.

For application of the MAX2681 at 900MHz, 1950MHz of 2450MHz, or for further device information, consult the MAX2680/MAX2681/MAX2682 data sheet. For higher input IP3 performance, refer to the application note 890, "Silicon Germanium (SiGe) Downconverter Tuned for GPS Receivers."

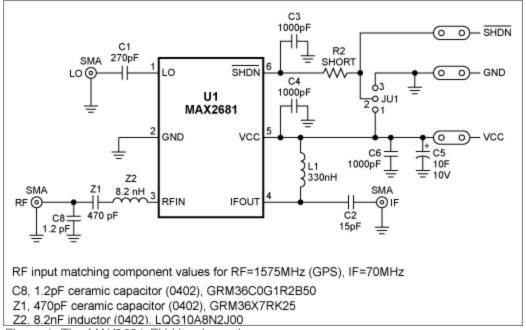


Figure 1. The MAX2681 EV kit schematic.

Table 1. The MAX2681 GPS Performance

 $V_{CC} = +3.0V$, $f_{RF1} = 1575 MHz$, $f_{RF2} = 1576 MHz$, $f_{LO} = 1645 MHz$, $P_{LO} = -5 dBm$, $f_{IF} = 70 MHz$

Parameter	Measure Performance	
Conversion Gain	on Gain +10.5dB	
Noise Figure 9.6dB		
Input Third-Order Intercept Point	-0.8dBm	
RF Input Return Loss	-19.3dB	
Supply Current	8.8mA	

NOTE: PCB losses are not taken into account.

Related Parts		
MAX2680	400MHz to 2.5GHz, Low-Noise, SiGe Downconverter Mixers	
MAX2681	400MHz to 2.5GHz, Low-Noise, SiGe Downconverter Mixers	
MAX2682	400MHz to 2.5GHz, Low-Noise, SiGe Downconverter Mixers	Free Samples

More Information

For Technical Support: http://www.maximintegrated.com/support

For Samples: http://www.maximintegrated.com/samples

Other Questions and Comments: http://www.maximintegrated.com/contact

Application Note 957: http://www.maximintegrated.com/an957

APPLICATION NOTE 957, AN957, AN 957, APP957, Appnote 957

Copyright © by Maxim Integrated Products

Additional Legal Notices: http://www.maximintegrated.com/legal