
HiPerFAST™ IGBT with Diode

B2-Class High Speed IGBTs

IXGK 50N60B2D1
IXGX 50N60B2D1


V_{CES} = 600 V
I_{C25} = 75 A
$V_{CE(sat)}$ = 2.0 V
$t_{fi(typ)}$ = 65 ns




Symbol	Test Conditions	Maximum Ratings	
V_{CES}	T_J = 25°C to 150°C	600	V
V_{CGR}	T_J = 25°C to 150°C; R_{GE} = 1 MΩ	600	V
V_{GES}	Continuous	±20	V
V_{GEM}	Transient	±30	V
I_{C25}	T_C = 25°C (limited by leads)	75	A
I_{C110}	T_C = 110°C	50	A
I_{F110}	T_C = 110°C (50N60B2D1 Diode)	38	A
I_{CM}	T_C = 25°C, 1 ms	200	A
SSOA (RBSOA)	V_{GE} = 15 V, T_{VJ} = 125°C, R_G = 10 Ω Clamped inductive load @ $V_{CE} \le 600$ V	I_{CM} = 80	A
P_C	T_C = 25°C	400	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
M_d	Mounting torque, TO-264	1.13/10	Nm/lb.in.
Weight	TO-264	10	g
	PLUS247	6	g
Maximum lead temperature for soldering 1.6 mm (0.062 in.) from case for 10 s		300	°C

Symbol	Test Conditions		Characteristic Values (T_J = 25°C, unless otherwise specified) Min.	Typ.	Max.	
$V_{GE(th)}$	I_C = 250 μA, $V_{CE} = V_{GE}$		3.0		5.0	V
I_{CES}	$V_{CE} = V_{CES}$	T_J = 25°C			600	μA
	V_{GE} = 0 V	T_J = 125°C			5	mA
I_{GES}	V_{CE} = 0 V, V_{GE} = ±20 V				±100	nA
$V_{CE(sat)}$	I_C = 40 A, V_{GE} = 15 V			1.6	2.0	V
	Note 1	T_J = 125°C		1.5		V

TO-264 (IXGK)



PLUS247 (IXGX)



G = Gate C = Collector
E = Emitter Tab = Collector

Features

- High frequency IGBT and anti-parallel FRED in one package
- High current handling capability
- MOS Gate turn-on for drive simplicity
- Fast Recovery Epitaxial Diode (FRED) with soft recovery and low I_{RM}

Applications

- Switch-mode and resonant-mode power supplies
- Uninterruptible power supplies (UPS)
- DC choppers
- AC motor speed control
- DC servo and robot drives

Advantages

- Space savings (two devices in one package)
- Easy to mount with 1 screw

© 2004 IXYS All rights reserved


Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) Min.	Typ.	Max.	
g_{fs}	I_C = 40 A; V_{CE} = 10 V, Note 1	40	55		S
C_{ies}			3500		pF
C_{oes}	V_{CE} = 25 V, V_{GE} = 0 V, f = 1 MHz		220		pF
C_{res}			50		pF
Q_g			140		nC
Q_{ge}	I_C = 40 A, V_{GE} = 15 V, V_{CE} = 0.5 V_{CES}		23		nC
Q_{gc}			44		nC
$t_{d(on)}$			18		ns
t_{ri}	**Inductive load, T_J = 25°C**		25		ns
$t_{d(off)}$	I_C = 40 A, V_{GE} = 15 V		190	300	ns
t_{fi}	V_{CE} = 480 V, R_G = R_{off} = 5.0 Ω		65		ns
E_{off}			0.55	0.85	mJ
$t_{d(on)}$			18		ns
t_{ri}	**Inductive load, T_J = 125°C**		25		ns
E_{on}	I_C = 40 A, V_{GE} = 15 V		0.9		mJ
$t_{d(off)}$	V_{CE} = 480 V, R_G = R_{off} = 5.0 Ω		290		ns
t_{fi}			140		ns
E_{off}			1.55		mJ
R_{thJC}				0.31	K/W
R_{thCK}			0.15		K/W

Reverse Diode (FRED)

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
V_F	I_F = 60 A, V_{GE} = 0 V, Note 1 T_J = 150°C			2.1 1.4	V
I_{RM}	I_F = 60 A, V_{GE} = 0 V, -di_F/dt = 100 A/µs T_J = 100°C V_R = 100 V			8.3	A
t_{rr}	I_F = 1 A; -di/dt = 200 A/ms; V_R = 30 V		35		ns
R_{thJC}				0.65	K/W


Note 1: Pulse test, t ≤ 300 µs, duty cycle ≤ 2 %

TO-264 Outline



Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.82	5.13	.190	.202
A1	2.54	2.89	.100	.114
A2	2.00	2.10	.079	.083
b	1.12	1.42	.044	.056
b1	2.39	2.69	.094	.106
b2	2.90	3.09	.114	.122
c	0.53	0.83	.021	.033
D	25.91	26.16	1.020	1.030
E	19.81	19.96	.780	.786
e	5.46 BSC		.215 BSC	
J	0.00	0.25	.000	.010
K	0.00	0.25	.000	.010
L	20.32	20.83	.800	.820
L1	2.29	2.59	.090	.102
P	3.17	3.66	.125	.144
Q	6.07	6.27	.239	.247
Q1	8.38	8.69	.330	.342
R	3.81	4.32	.150	.170
R1	1.78	2.29	.070	.090
S	6.04	6.30	.238	.248
T	1.57	1.83	.062	.072

PLUS247 Outline

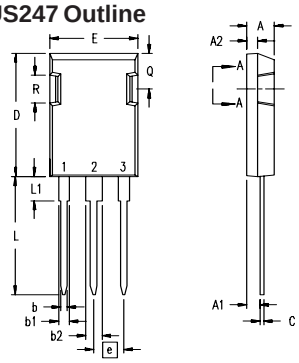

Terminals: 1 - Gate
2 - Drain (Collector)
3 - Source (Emitter)
4 - Drain (Collector)

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.83	5.21	.190	.205
A_1	2.29	2.54	.090	.100
A_2	1.91	2.16	.075	.085
b	1.14	1.40	.045	.055
b_1	1.91	2.13	.075	.084
b_2	2.92	3.12	.115	.123
C	0.61	0.80	.024	.031
D	20.80	21.34	.819	.840
E	15.75	16.13	.620	.635
e	5.45 BSC		.215 BSC	
L	19.81	20.32	.780	.800
L1	3.81	4.32	.150	.170
Q	5.59	6.20	.220	0.244
R	4.32	4.83	.170	.190

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,850,072 4,835,592 4,931,844 4,881,106 5,034,796 5,017,508 5,063,307 5,049,961 5,237,481 5,187,117 5,381,025 5,486,715 6,404,065B1 6,306,728B1 6,162,665 6,259,123B1 6,534,343 6,306,728B1 6,583,505 6,683,344

Fig. 1. Output Characteristics @ 25 Deg. C

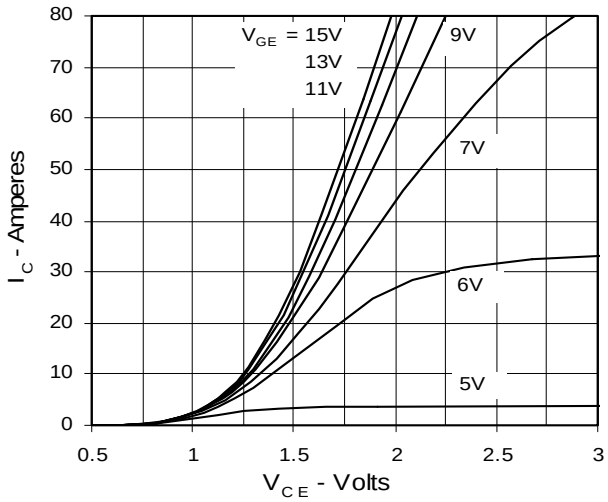


Fig. 2. Extended Output Characteristics @ 25 deg. C

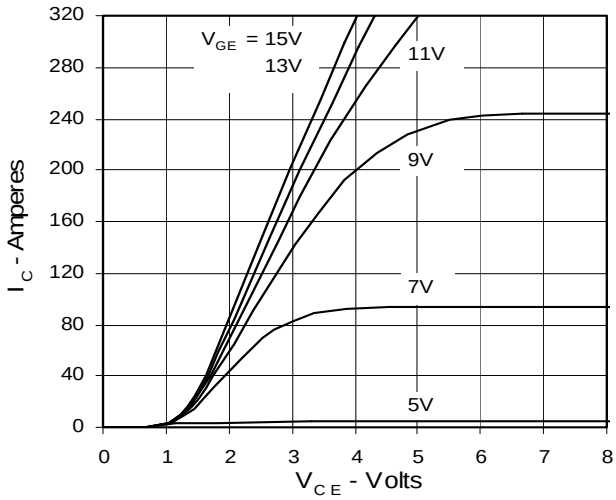


Fig. 3. Output Characteristics @ 125 Deg. C

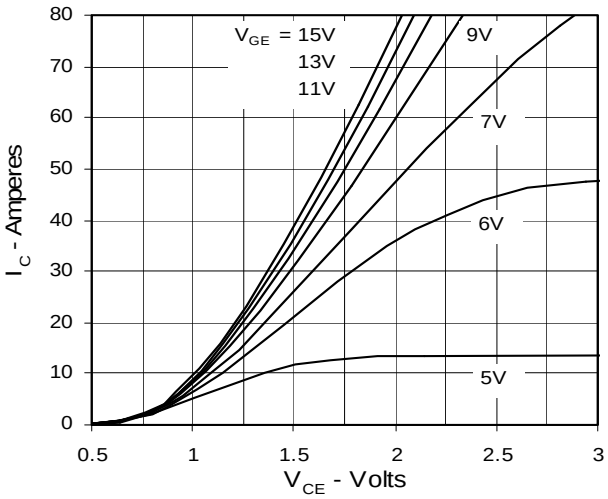


Fig. 4. Dependence of $V_{CE(sat)}$ on Temperature

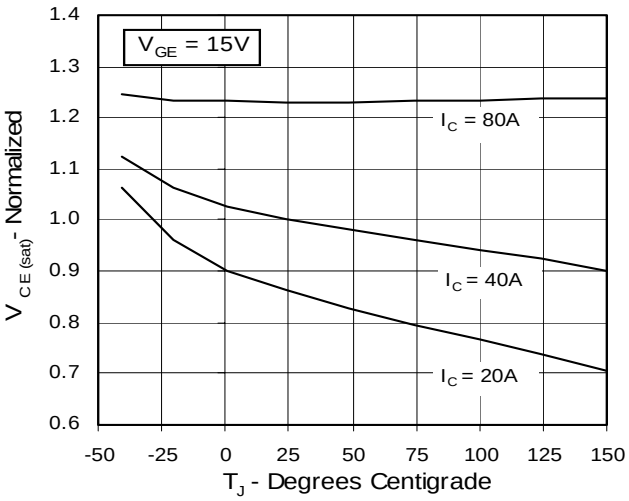


Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter voltage


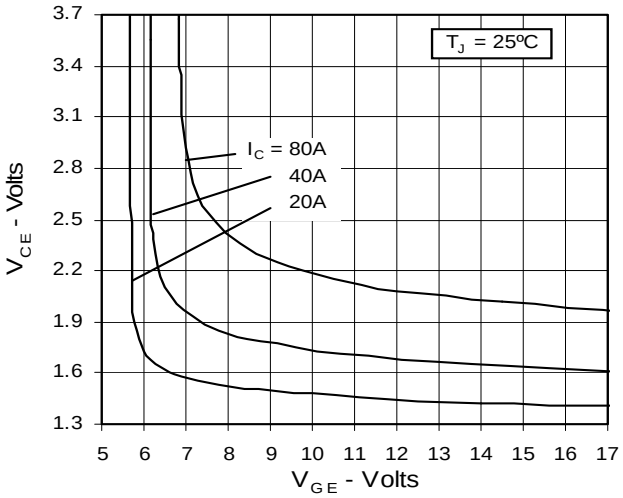


Fig. 6. Input Admittance

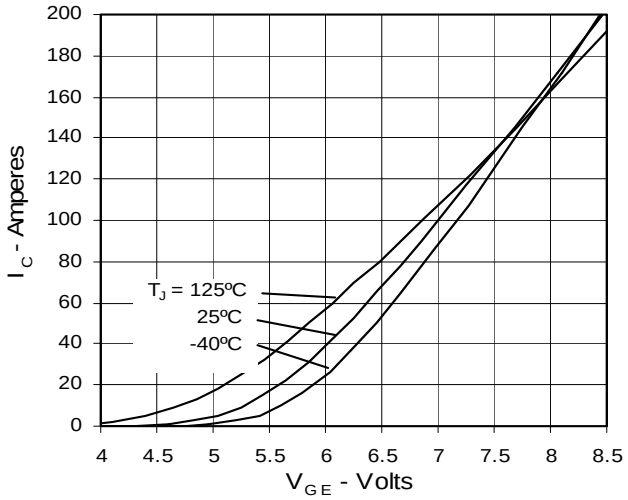

© 2004 IXYS All rights reserved

Fig. 7. Transconductance

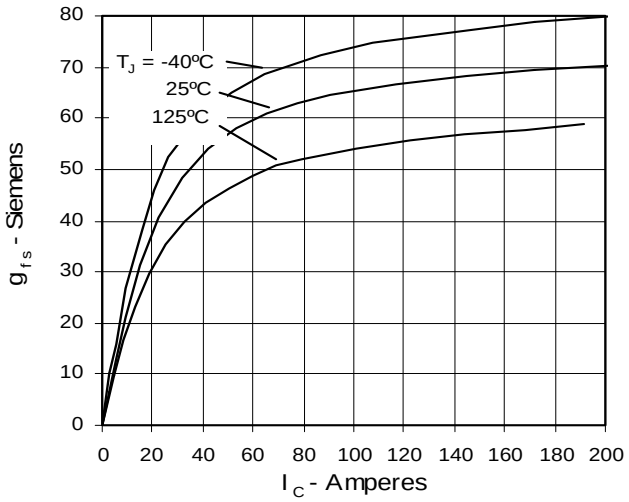


Fig. 8. Dependence of Turn-Off Energy on R_G

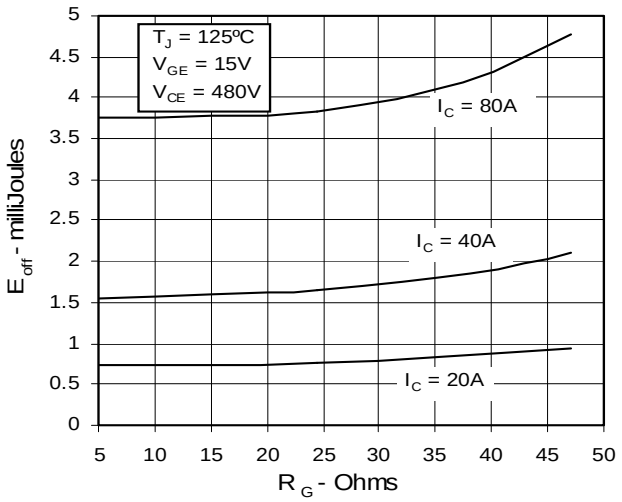


Fig. 9. Dependence of Turn-Off Energy on I_C

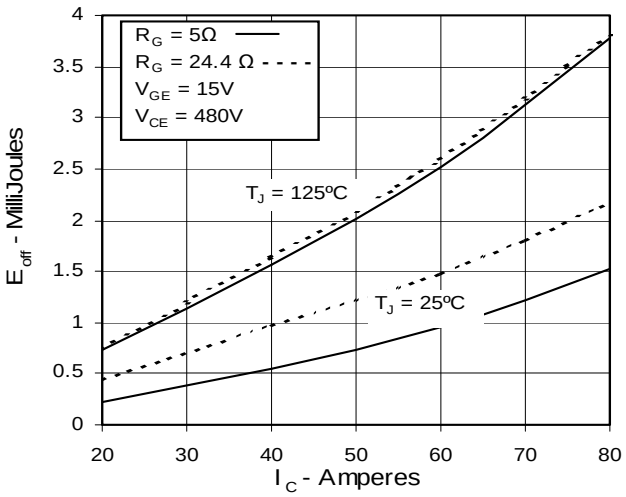


Fig. 10. Dependence of Turn-Off Energy on Temperature

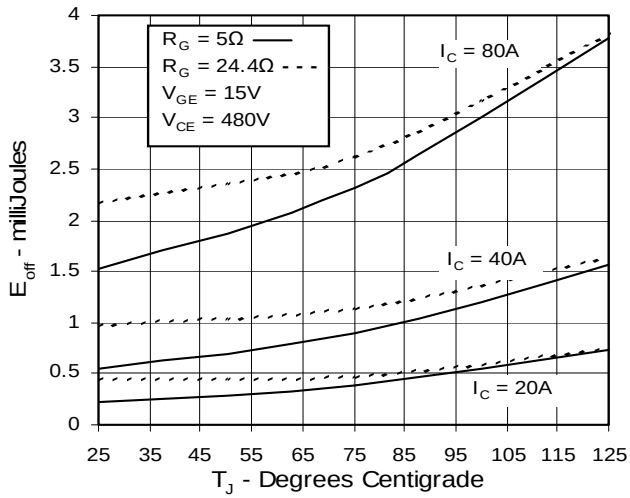


Fig. 11. Dependence of Turn-Off Switching Time on R_G


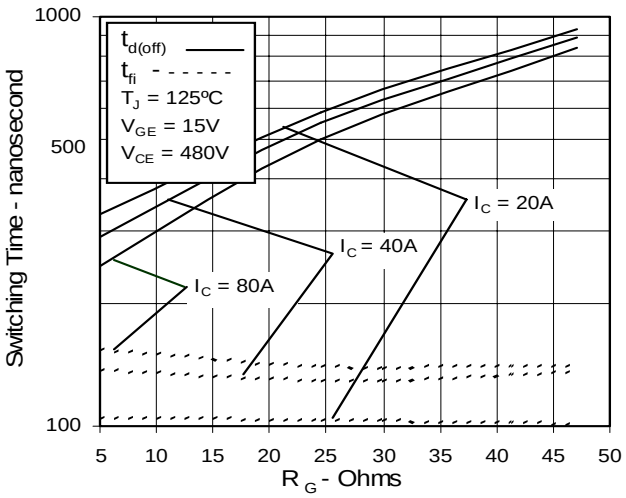


Fig. 12. Dependence of Turn-Off Switching Time on I_C

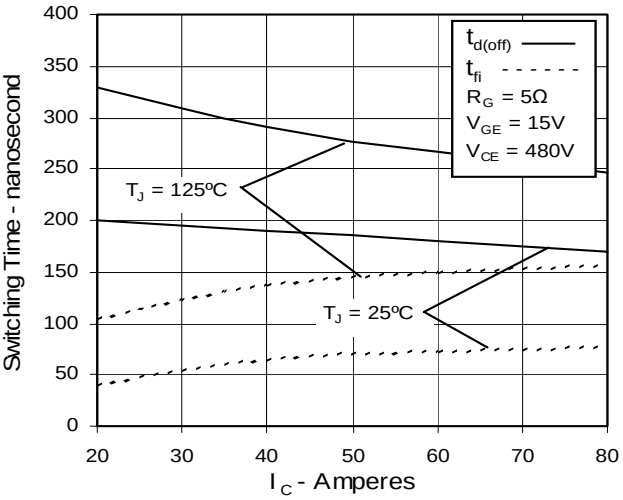

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,850,072 4,835,592 4,931,844 4,881,106 5,034,796 5,017,508 5,063,307 5,049,961 5,237,481 5,187,117 5,381,025 5,486,715 6,404,065B1 6,306,728B1 6,162,665 6,259,123B1 6,534,343 6,306,728B1 6,583,505 6,683,344

Fig. 13. Dependence of Turn-Off Switching Time on Temperature

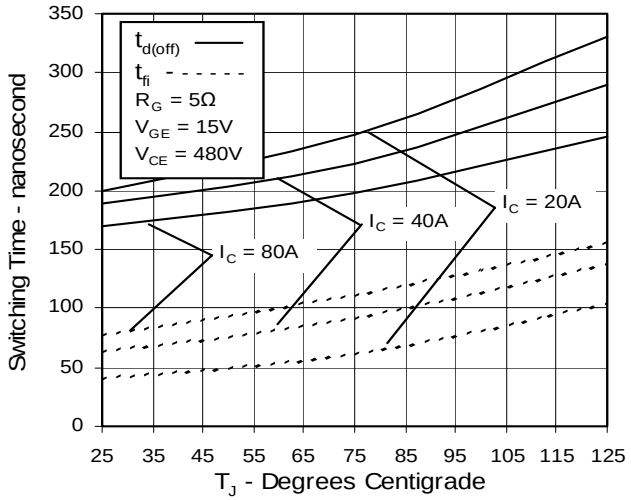


Fig. 14. Reverse-Bias Safe Operating Area

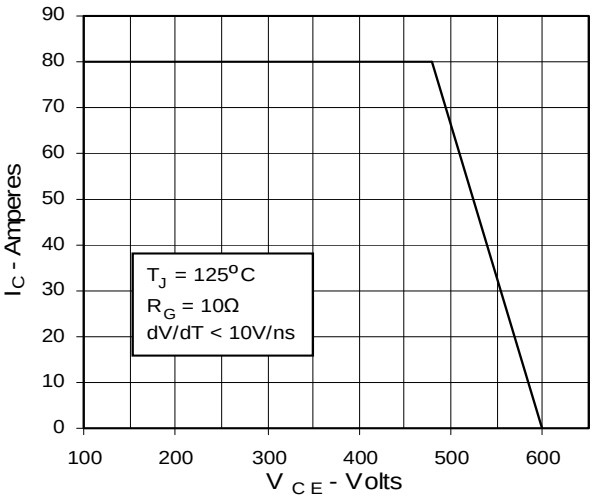


Fig. 15. Gate Charge

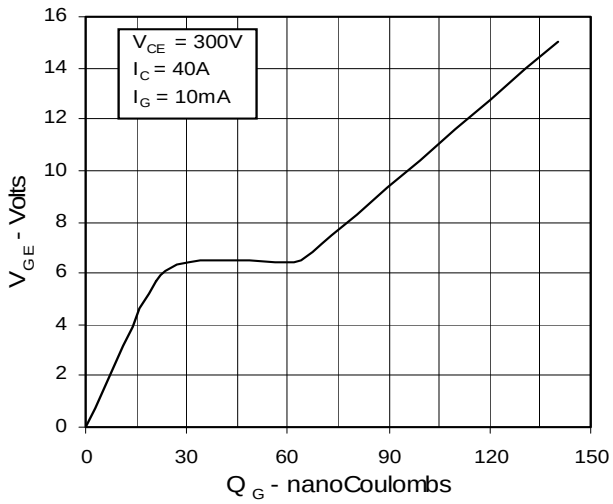


Fig. 16. Capacitance


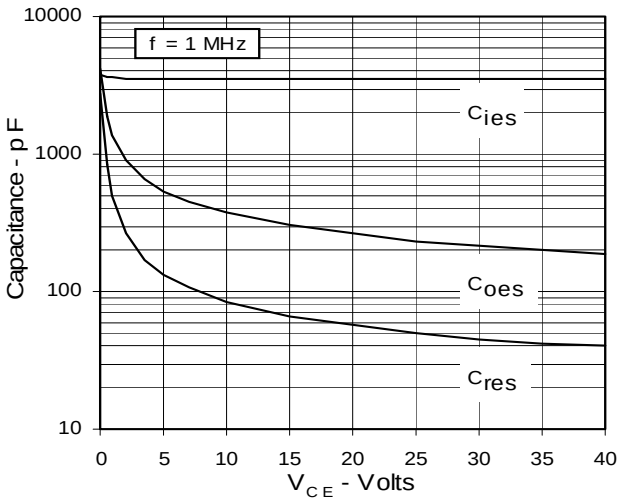


Fig. 17. Maximum Transient Thermal Resistance

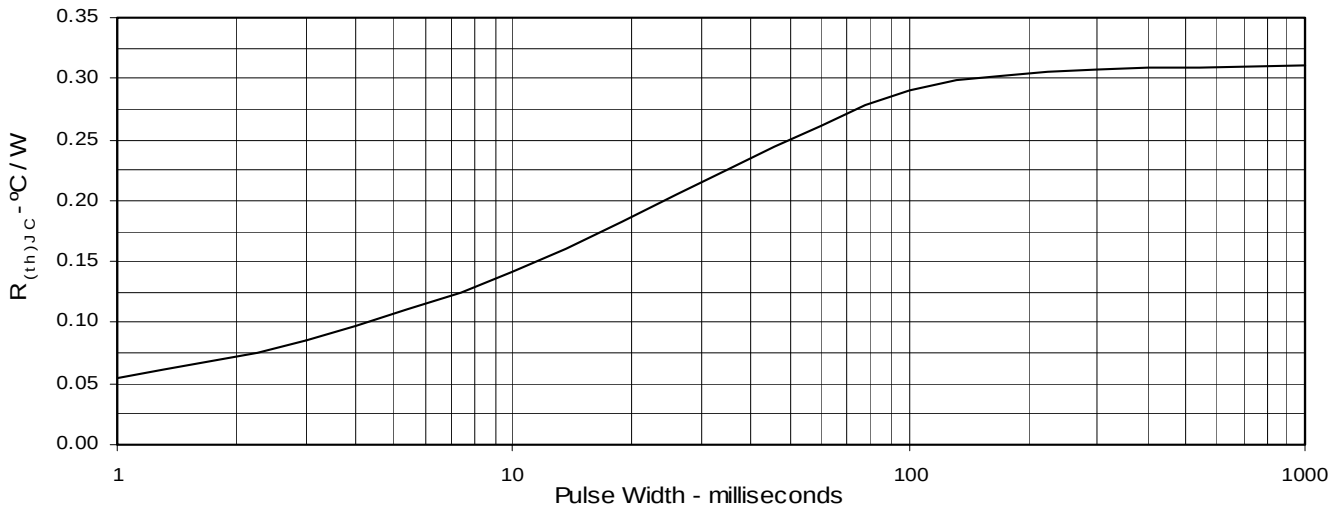

© 2004 IXYS All rights reserved

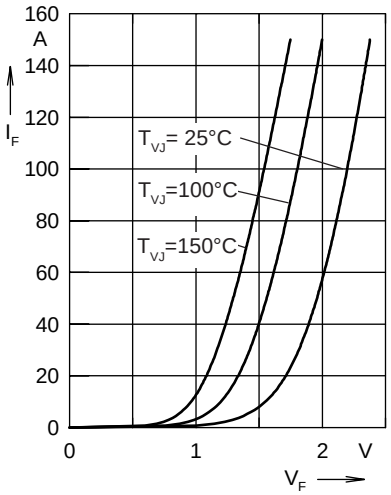


Fig. 18. Forward current I_F versus V_F

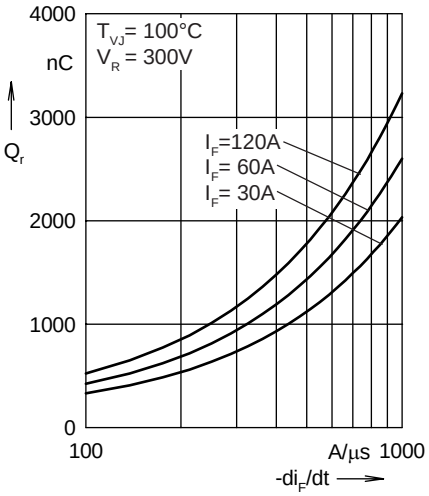


Fig. 19. Reverse recovery charge Q_r versus -di_F/dt

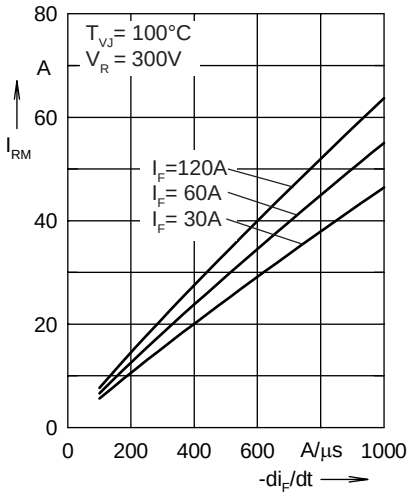


Fig. 20. Peak reverse current I_{RM} versus -di_F/dt

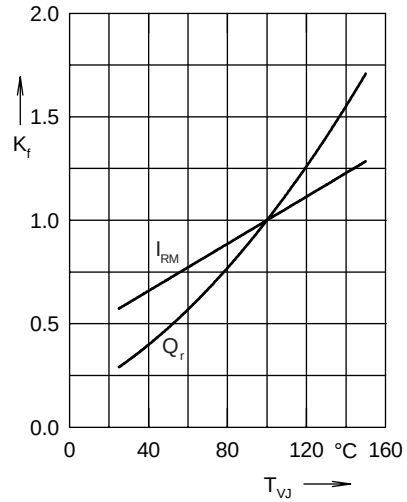


Fig. 21. Dynamic parameters Q_r, I_{RM} versus T_{VJ}

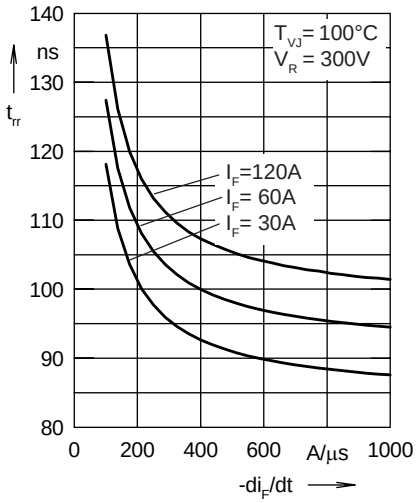


Fig. 22. Recovery time t_{rr} versus -di_F/dt

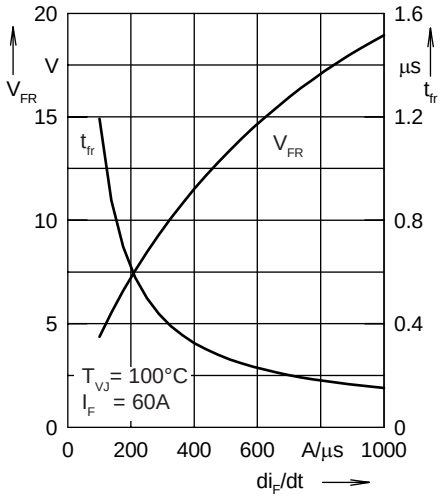


Fig. 23. Peak forward voltage V_{FR} and t_{fr} versus di_F/dt

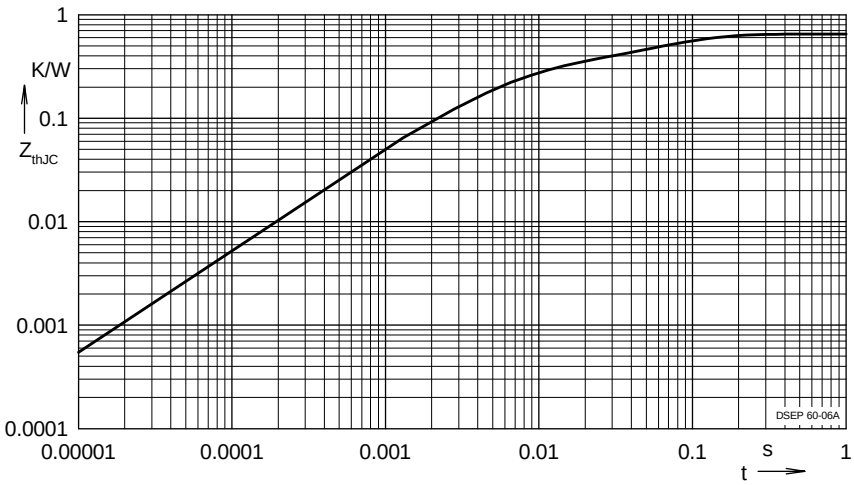


Fig. 24. Transient thermal resistance junction to case

Constants for Z_{thJC} calculation:

i	R_{thi} (K/W)	t_i (s)
1	0.324	0.0052
2	0.125	0.0003
3	0.201	0.0385

Note: Fig. 18 through Fig. 23 show typical values

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025 6,404,065B1 6,162,665 6,534,343 6,583,505 4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715 6,306,728B1 6,259,123B1 6,306,728B1 6,683,344