
CoolMOS™ [1] Power MOSFET


I_{D25} = 24 A
V_{DSS} = 600 V
$R_{DS(on)\ max}$ = 0.165 Ω

N-Channel Enhancement Mode
Low R_{DSon}, High V_{DSS} MOSFET
Ultra low gate charge


Preliminary data



TO-247 AD (IXKH)



TO-220 AB (IXKP)



MOSFET

Symbol	Conditions	Maximum Ratings	
V_{DSS}	T_{VJ} = 25°C	600	V
V_{GS}		± 20	V
I_{D25}	T_C = 25°C	24	A
I_{D90}	T_C = 90°C	16	A
E_{AS}	single pulse } I_D = 7.9 A; T_C = 25°C	522	mJ
E_{AR}	repetitive } I_D = 7.9 A; T_C = 25°C	0.79	mJ
dV/dt	MOSFET dV/dt ruggedness V_{DS} = 0...480 V	50	V/ns

Symbol	Conditions	Characteristic Values (T_{VJ} = 25°C, unless otherwise specified) min.	typ.	max.	
R_{DSon}	V_{GS} = 10 V; I_D = 12 A		150	165	mΩ
$V_{GS(th)}$	V_{DS} = V_{GS}; I_D = 0.79 mA	2.5	3	3.5	V
I_{DSS}	V_{DS} = 600 V; V_{GS} = 0 V; T_{VJ} = 25°C			1	µA
	V_{DS} = 600 V; V_{GS} = 0 V; T_{VJ} = 125°C		10		µA
I_{GSS}	V_{GS} = ± 20 V; V_{DS} = 0 V			100	nA
C_{iss}	V_{GS} = 0 V; V_{DS} = 100 V; f = 1 MHz		2000		pF
C_{oss}	V_{GS} = 0 V; V_{DS} = 100 V; f = 1 MHz		100		pF
Q_g	V_{GS} = 0 to 10 V; V_{DS} = 400 V; I_D = 12 A		40	52	nC
Q_{gs}	V_{GS} = 0 to 10 V; V_{DS} = 400 V; I_D = 12 A		9		nC
Q_{gd}	V_{GS} = 0 to 10 V; V_{DS} = 400 V; I_D = 12 A		13		nC
$t_{d(on)}$	V_{GS} = 10 V; V_{DS} = 400 V; I_D = 12 A; R_G = 3.3 Ω		12		ns
t_r	V_{GS} = 10 V; V_{DS} = 400 V; I_D = 12 A; R_G = 3.3 Ω		5		ns
$t_{d(off)}$	V_{GS} = 10 V; V_{DS} = 400 V; I_D = 12 A; R_G = 3.3 Ω		50		ns
t_f	V_{GS} = 10 V; V_{DS} = 400 V; I_D = 12 A; R_G = 3.3 Ω		5		ns
R_{thJC}				0.5	K/W

Features

- fast CoolMOS™ [1] power MOSFET
  - 4th generation
  - High blocking capability
  - Lowest resistance
  - Avalanche rated for unclamped inductive switching (UIS)
  - Low thermal resistance due to reduced chip thickness
- Enhanced total power density

Applications

- Switched mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)
- Power factor correction (PFC)
- Welding
- Inductive heating
- PDP and LCD adapter

[1] CoolMOS™ is a trademark of Infineon Technologies AG.

IXYS reserves the right to change limits, test conditions and dimensions.

© 2008 IXYS All rights reserved

Source-Drain Diode

Symbol	Conditions	Characteristic Values (T_{VJ} = 25°C, unless otherwise specified) min.	typ.	max.	
I_S	V_{GS} = 0 V			12	A
V_{SD}	I_F = 12 A; V_{GS} = 0 V		0.9	1.2	V
t_{rr}	I_F = 12 A; -di_F/dt = 100 A/µs; V_R = 400 V		390		ns
Q_{RM}			7.5		µC
I_{RM}			38		A


Component

Symbol	Conditions		Maximum Ratings	
T_{VJ}	operating		-55...+150	°C
T_{stg}			-55...+150	°C
M_d	mounting torque	TO-247	0.8 ... 1.2	Nm
		TO-220	0.4 ... 0.6	Nm

Symbol	Conditions		Characteristic Values min.	typ.	max.	
R_{thCH}	with heatsink compound	TO-247		0.25		K/W
		TO-220		0.50		K/W
Weight	TO-247			6		g
	TO-220			2		g


© 2008 IXYS All rights reserved

TO-247 AD Outline

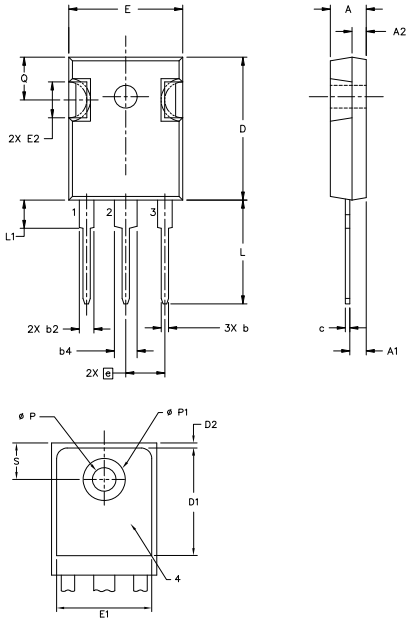

Symbol	Inches		Millimeters	
	min	max	min	max
A	0.185	0.209	4.70	5.30
A1	0.087	0.102	2.21	2.59
A2	0.059	0.098	1.50	2.49
D	0.819	0.845	20.79	21.45
E	0.610	0.640	15.48	16.24
E2	0.170	0.216	4.31	5.48
e	0.215 BSC		5.46 BSC	
L	0.780	0.800	19.80	20.30
L1	-	0.177	-	4.49
ØP	0.140	0.144	3.55	3.65
Q	0.212	0.244	5.38	6.19
S	0.242 BSC		6.14 BSC	
b	0.039	0.055	0.99	1.40
b2	0.065	0.094	1.65	2.39
b4	0.102	0.135	2.59	3.43
c	0.015	0.035	0.38	0.89
D1	0.515	-	13.07	-
D2	0.020	0.053	0.51	1.35
E1	0.530	-	13.45	-
ØP1	-	0.291	-	7.39

TO-220 AB Outline

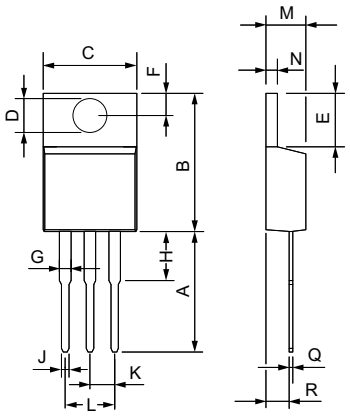

Dim.	Millimeter		Inches	
	Min.	Max.	Min.	Max.
A	12.70	13.97	0.500	0.550
B	14.73	16.00	0.580	0.630
C	9.91	10.66	0.390	0.420
D	3.54	4.08	0.139	0.161
E	5.85	6.85	0.230	0.270
F	2.54	3.18	0.100	0.125
G	1.15	1.65	0.045	0.065
H	2.79	5.84	0.110	0.230
J	0.64	1.01	0.025	0.040
K	2.54	BSC	0.100	BSC
M	4.32	4.82	0.170	0.190
N	1.14	1.39	0.045	0.055
Q	0.35	0.56	0.014	0.022
R	2.29	2.79	0.090	0.110

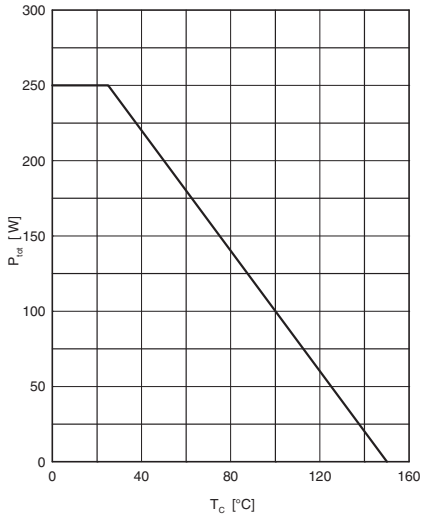


Fig. 1 Power dissipation

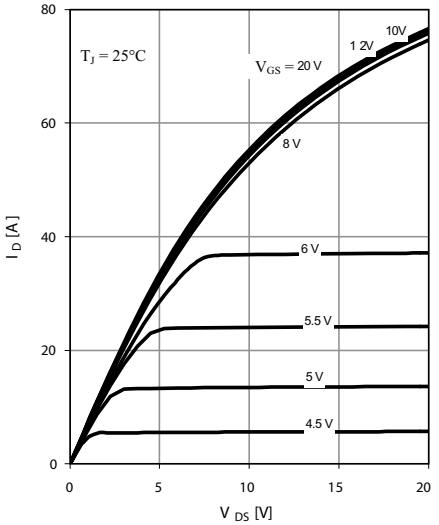


Fig. 2 Typ. output characteristics

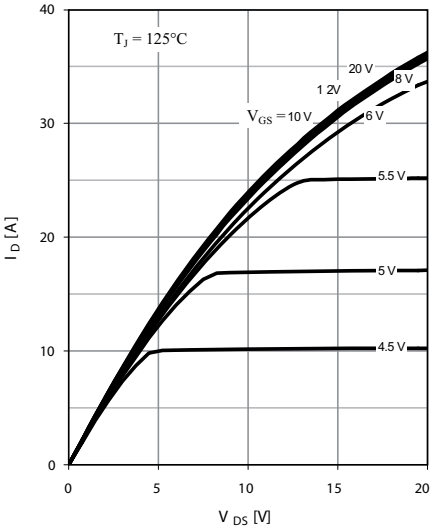


Fig. 3 Typ. output characteristics

© 2008 IXYS All rights reserved

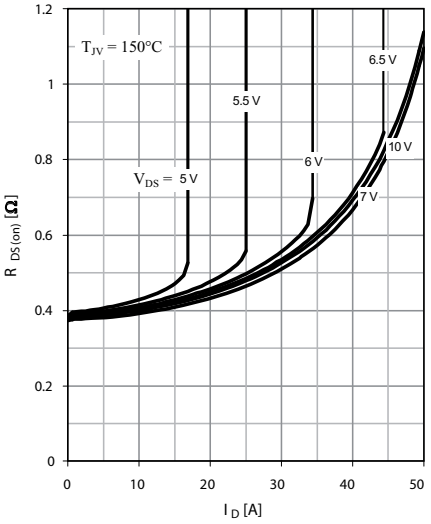


Fig. 4 Typ. drain-source on-state resistance characteristics of IGBT

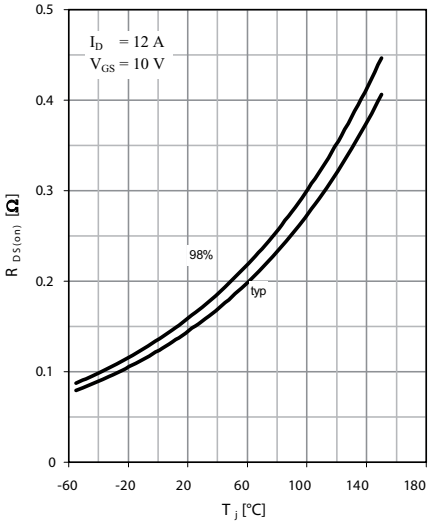


Fig. 5 Drain-source on-state resistance

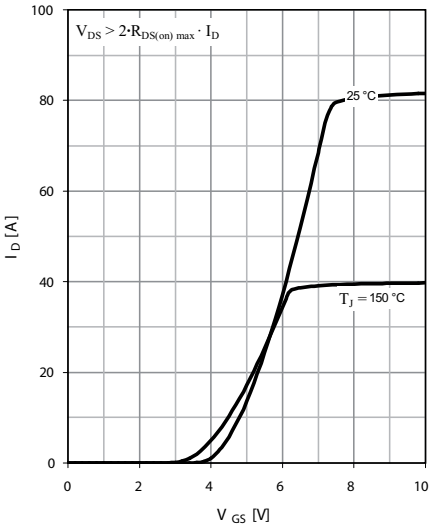


Fig. 6 Typ. transfer characteristics

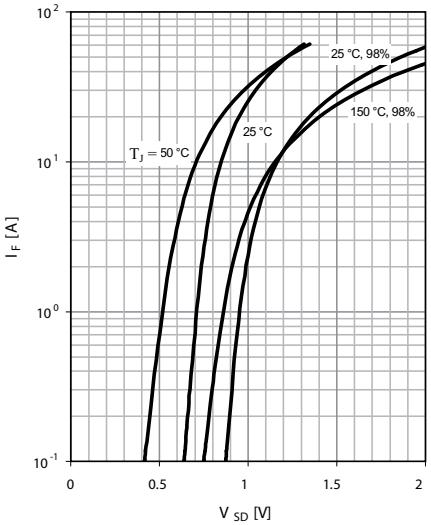


Fig. 7 Forward characteristic of reverse diode

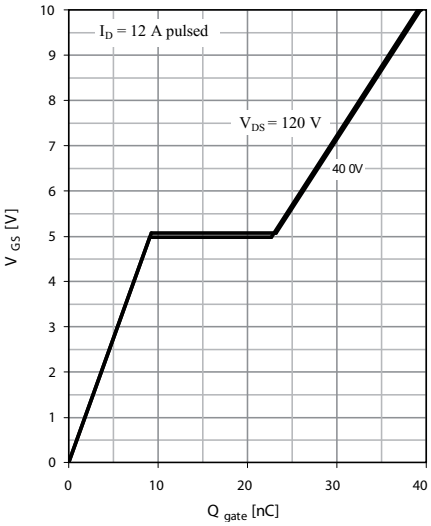


Fig. 8 Typ. gate charge

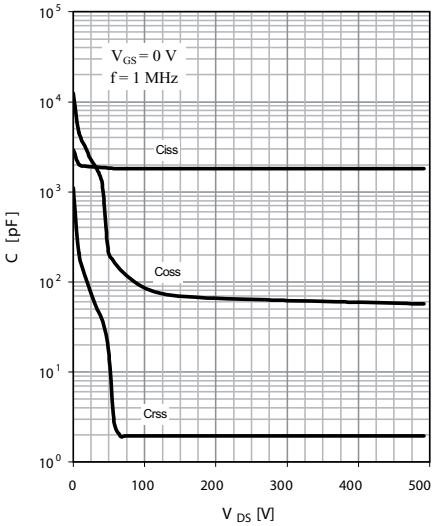


Fig. 9 Typ. capacitances

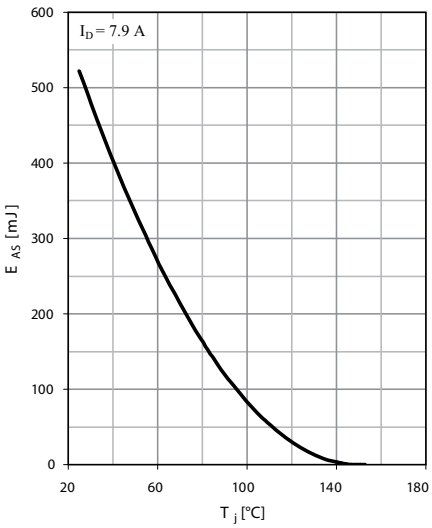


Fig. 10 Avalanche energy

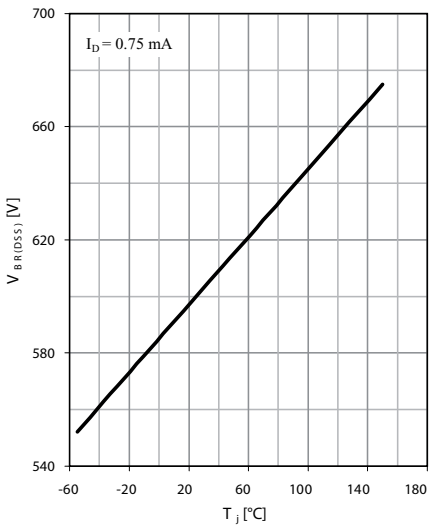


Fig. 11 Drain-source breakdown voltage

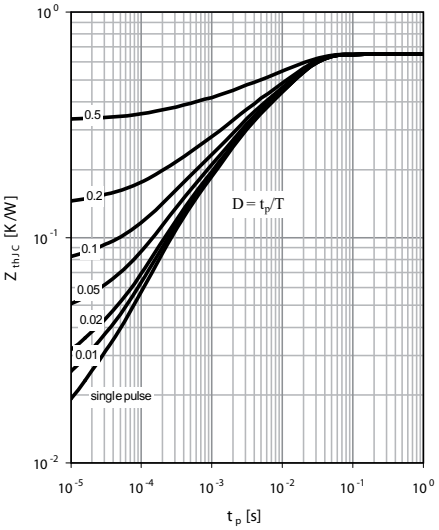


Fig. 12 Max. transient thermal impedance

IXYS reserves the right to change limits, test conditions and dimensions.

20080523c

© 2008 IXYS All rights reserved



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications.Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.