


SIZE	QTY	SYM	PLTD
10	41	+	PLTD
95	8	X	PLTD
70	2	◇	NPLTD

# FAB DRAWING

## NOTES : Unless Otherwise Specified

- FAB PER IPC-A-600.
- MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.  
2 OZ. COPPER FINISHED ON OUTER LAYERS.  
1 OZ. COPPER FINISHED ON INNER LAYERS.  
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.  
FLAMABILITY RATING: 94 V-0 MINIMUM .
- SIZE: DIMENSIONS AND TOLERANCES SHOWN.  
0.000 ARE PRIMARY DATUMS.
- DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH  
HOLES WITH COPPER. .001 INCH THICK MIN. ALL  
HOLE SIZES ARE SPECIFIED AFTER PLATING.  
HOLE LOCATION TOLERANCES ARE +/- .003  
INCH IN RELATION TO CENTER
- SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
- SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
- SCORING:

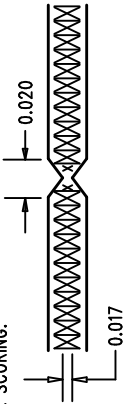

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOLERANCES ON ANGLE ±1  
2 PLACE ±.01 3 PLACE ±.005  
INTERPRET DIM AND TOL  
PER ASME Y14.5M - 1994

## APPROVALS

DRAWN	INIT	DATE
CHECK		
DESIGN	JUNE WU	11/6/03
ENGR	David Ng	8/18/05



TITLE: LT3435IFE, 3A, 500kHz Step-Down Converter  
with Burst Mode ™

SIZE	A	DEMO	DC613A	REV.	A

SCALE = NONE

SHT 1 of 1