

# BUL44G

## SWITCHMODE™ NPN Bipolar Power Transistor

### For Switching Power Supply Applications

The BUL44G have an applications specific state-of-the-art die designed for use in 220 V line operated Switchmode Power supplies and electronic light ballasts.

#### Features

- Improved Efficiency Due to Low Base Drive Requirements:
  - High and Flat DC Current Gain  $h_{FE}$
  - Fast Switching
  - No Coil Required in Base Circuit for Turn-Off (No Current Tail)
- Full Characterization at 125°C
- Tight Parametric Distributions are Consistent Lot-to-Lot
- These Devices are Pb-Free and are RoHS Compliant\*

#### MAXIMUM RATINGS

| Rating                                                                                                 | Symbol            | Value      | Unit      |
|--------------------------------------------------------------------------------------------------------|-------------------|------------|-----------|
| Collector-Emitter Sustaining Voltage                                                                   | $V_{CEO}$         | 400        | Vdc       |
| Collector-Base Breakdown Voltage                                                                       | $V_{CES}$         | 700        | Vdc       |
| Emitter-Base Voltage                                                                                   | $V_{EBO}$         | 9.0        | Vdc       |
| Collector Current <ul style="list-style-type: none"><li>– Continuous</li><li>– Peak (Note 1)</li></ul> | $I_C$<br>$I_{CM}$ | 2.0<br>5.0 | Adc       |
| Base Current <ul style="list-style-type: none"><li>– Continuous</li><li>– Peak (Note 1)</li></ul>      | $I_B$<br>$I_{BM}$ | 1.0<br>2.0 | Adc       |
| Total Device Dissipation @ $T_C = 25^\circ\text{C}$<br>Derate above 25°C                               | $P_D$             | 50<br>0.4  | W<br>W/°C |
| Operating and Storage Temperature                                                                      | $T_J, T_{stg}$    | –65 to 150 | °C        |

#### THERMAL CHARACTERISTICS

| Characteristics                                                                 | Symbol          | Max  | Unit |
|---------------------------------------------------------------------------------|-----------------|------|------|
| Thermal Resistance, Junction-to-Case                                            | $R_{\theta JC}$ | 2.5  | °C/W |
| Thermal Resistance, Junction-to-Ambient                                         | $R_{\theta JA}$ | 62.5 | °C/W |
| Maximum Lead Temperature for Soldering<br>Purposes 1/8" from Case for 5 Seconds | $T_L$           | 260  | °C   |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.


1. Pulse Test: Pulse Width = 5 ms, Duty Cycle ≤ 10%.



ON Semiconductor®


<http://onsemi.com>

### POWER TRANSISTOR 2.0 AMPERES, 700 VOLTS, 40 AND 100 WATTS



TO-220AB  
CASE 221A-09  
STYLE 1

#### MARKING DIAGRAM



BUL44 = Device Code  
A = Assembly Location  
Y = Year  
WW = Work Week  
G = Pb-Free Package

#### ORDERING INFORMATION

| Device | Package             | Shipping        |
|--------|---------------------|-----------------|
| BUL44G | TO-220<br>(Pb-Free) | 50 Units / Rail |

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

# BUL44G

## ELECTRICAL CHARACTERISTICS (T<sub>C</sub> = 25°C unless otherwise noted)

| Characteristic                                                                                                                                                                                                                                                  |                                                                                    |        |                          | Symbol                | Min                                     | Typ                                   | Max                              | Unit |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------|--------|--------------------------|-----------------------|-----------------------------------------|---------------------------------------|----------------------------------|------|
| OFF CHARACTERISTICS                                                                                                                                                                                                                                             |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| Collector–Emitter Sustaining Voltage<br>(I <sub>C</sub> = 100 mA, L = 25 mH)                                                                                                                                                                                    |                                                                                    |        |                          | V <sub>CEO(sus)</sub> | 400                                     | –                                     | –                                | Vdc  |
| Collector Cutoff Current<br>(V <sub>CE</sub> = Rated V <sub>CEO</sub> , I <sub>B</sub> = 0)                                                                                                                                                                     |                                                                                    |        |                          | I <sub>CEO</sub>      | –                                       | –                                     | 100                              | μAdc |
| Collector Cutoff Current (V <sub>CE</sub> = Rated V <sub>CES</sub> ,<br>V <sub>EB</sub> = 0)<br>(V <sub>CE</sub> = 500 V, V <sub>EB</sub> = 0)                                                                                                                  |                                                                                    |        |                          | I <sub>CES</sub>      | –                                       | –                                     | 100                              | μAdc |
| (T <sub>C</sub> = 125°C)                                                                                                                                                                                                                                        |                                                                                    |        |                          |                       | –                                       | –                                     | 500                              |      |
| (T <sub>C</sub> = 125°C)                                                                                                                                                                                                                                        |                                                                                    |        |                          |                       | –                                       | –                                     | 100                              |      |
| Emitter Cutoff Current<br>(V <sub>EB</sub> = 9.0 Vdc, I <sub>C</sub> = 0)                                                                                                                                                                                       |                                                                                    |        |                          | I <sub>EBO</sub>      | –                                       | –                                     | 100                              | μAdc |
| ON CHARACTERISTICS                                                                                                                                                                                                                                              |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| Base–Emitter Saturation Voltage<br>(I <sub>C</sub> = 0.4 Adc, I <sub>B</sub> = 40 mAdc)<br>(I <sub>C</sub> = 1.0 Adc, I <sub>B</sub> = 0.2 Adc)                                                                                                                 |                                                                                    |        |                          | V <sub>BE(sat)</sub>  | –<br>–                                  | 0.85<br>0.92                          | 1.1<br>1.25                      | Vdc  |
| Collector–Emitter Saturation Voltage<br>(I <sub>C</sub> = 0.4 Adc, I <sub>B</sub> = 40 mAdc)<br><br>(I <sub>C</sub> = 1.0 Adc, I <sub>B</sub> = 0.2 Adc)                                                                                                        |                                                                                    |        |                          | V <sub>CE(sat)</sub>  | –<br>–<br>–<br>–                        | 0.20<br>0.20<br>0.25<br>0.25          | 0.5<br>0.5<br>0.6<br>0.6         | Vdc  |
| (T <sub>C</sub> = 125°C)                                                                                                                                                                                                                                        |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| (T <sub>C</sub> = 125°C)                                                                                                                                                                                                                                        |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| (T <sub>C</sub> = 125°C)                                                                                                                                                                                                                                        |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| DC Current Gain<br>(I <sub>C</sub> = 0.2 Adc, V <sub>CE</sub> = 5.0 Vdc)<br><br>(I <sub>C</sub> = 0.4 Adc, V <sub>CE</sub> = 1.0 Vdc)<br><br>(I <sub>C</sub> = 1.0 Adc, V <sub>CE</sub> = 1.0 Vdc)<br><br>(I <sub>C</sub> = 10 mAdc, V <sub>CE</sub> = 5.0 Vdc) |                                                                                    |        |                          | h <sub>FE</sub>       | 14<br>–<br>12<br>12<br>8.0<br>7.0<br>10 | –<br>32<br>20<br>20<br>14<br>13<br>22 | 34<br>–<br>–<br>–<br>–<br>–<br>– | –    |
| (T <sub>C</sub> = 125°C)                                                                                                                                                                                                                                        |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| (T <sub>C</sub> = 125°C)                                                                                                                                                                                                                                        |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| (T <sub>C</sub> = 125°C)                                                                                                                                                                                                                                        |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| (T <sub>C</sub> = 125°C)                                                                                                                                                                                                                                        |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| (T <sub>C</sub> = 125°C)                                                                                                                                                                                                                                        |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| (T <sub>C</sub> = 125°C)                                                                                                                                                                                                                                        |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| (T <sub>C</sub> = 125°C)                                                                                                                                                                                                                                        |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| DYNAMIC CHARACTERISTICS                                                                                                                                                                                                                                         |                                                                                    |        |                          |                       |                                         |                                       |                                  |      |
| Current Gain Bandwidth<br>(I <sub>C</sub> = 0.5 Adc, V <sub>CE</sub> = 10 Vdc, f = 1.0 MHz)                                                                                                                                                                     |                                                                                    |        |                          | f <sub>T</sub>        | –                                       | 13                                    | –                                | MHz  |
| Output Capacitance<br>(V <sub>CB</sub> = 10 Vdc, I <sub>E</sub> = 0, f = 1.0 MHz)                                                                                                                                                                               |                                                                                    |        |                          | C <sub>OB</sub>       | –                                       | 38                                    | 60                               | pF   |
| Input Capacitance<br>(V <sub>EB</sub> = 8.0 V)                                                                                                                                                                                                                  |                                                                                    |        |                          | C <sub>IB</sub>       | –                                       | 380                                   | 600                              | pF   |
| Dynamic Saturation Voltage:<br>Determined 1.0 μs and<br>3.0 μs respectively after<br>rising I <sub>B1</sub> reaches 90%<br>of final I <sub>B1</sub>                                                                                                             | (I <sub>C</sub> = 0.4 Adc<br>I <sub>B1</sub> = 40 mAdc<br>V <sub>CC</sub> = 300 V) | 1.0 μs | (T <sub>C</sub> = 125°C) | V <sub>CE(dsat)</sub> | –<br>–                                  | 2.5<br>2.7                            | –<br>–                           | Vdc  |
|                                                                                                                                                                                                                                                                 |                                                                                    | 3.0 μs | (T <sub>C</sub> = 125°C) |                       | –<br>–                                  | 1.3<br>1.15                           | –<br>–                           |      |
|                                                                                                                                                                                                                                                                 | (I <sub>C</sub> = 1.0 Adc<br>I <sub>B1</sub> = 0.2 Adc<br>V <sub>CC</sub> = 300 V) | 1.0 μs | (T <sub>C</sub> = 125°C) |                       | –<br>–                                  | 3.2<br>7.5                            | –<br>–                           |      |
|                                                                                                                                                                                                                                                                 |                                                                                    |        |                          |                       | –<br>–                                  | 1.25<br>1.6                           | –<br>–                           |      |
|                                                                                                                                                                                                                                                                 |                                                                                    | 3.0 μs | (T <sub>C</sub> = 125°C) |                       | –<br>–                                  | 1.25<br>1.6                           | –<br>–                           |      |
|                                                                                                                                                                                                                                                                 |                                                                                    |        |                          |                       | –<br>–                                  | 1.25<br>1.6                           | –<br>–                           |      |

# BUL44G

## SWITCHING CHARACTERISTICS: Resistive Load (D.C. ≤ 10%, Pulse Width = 20 μs)

|               |                                                                                                                                                    |           |        |              |          |    |
|---------------|----------------------------------------------------------------------------------------------------------------------------------------------------|-----------|--------|--------------|----------|----|
| Turn-On Time  | ( $I_C = 0.4 \text{ Adc}$ , $I_{B1} = 40 \text{ mAdc}$<br>$I_{B2} = 0.2 \text{ Adc}$ , $V_{CC} = 300 \text{ V}$ )<br>( $T_C = 125^\circ\text{C}$ ) | $t_{on}$  | –<br>– | 40<br>40     | 100<br>– | ns |
| Turn-Off Time | ( $I_C = 0.4 \text{ Adc}$ , $I_{B1} = 40 \text{ mAdc}$<br>$I_{B2} = 0.2 \text{ Adc}$ , $V_{CC} = 300 \text{ V}$ )<br>( $T_C = 125^\circ\text{C}$ ) | $t_{off}$ | –<br>– | 1.5<br>2.0   | 2.5<br>– | μs |
| Turn-On Time  | ( $I_C = 1.0 \text{ Adc}$ , $I_{B1} = 0.2 \text{ Adc}$<br>$I_{B1} = 0.5 \text{ Adc}$ , $V_{CC} = 300 \text{ V}$ )<br>( $T_C = 125^\circ\text{C}$ ) | $t_{on}$  | –<br>– | 85<br>85     | 150<br>– | ns |
| Turn-Off Time | ( $I_C = 1.0 \text{ Adc}$ , $I_{B1} = 0.2 \text{ Adc}$<br>$I_{B2} = 0.5 \text{ Adc}$ , $V_{CC} = 300 \text{ V}$ )<br>( $T_C = 125^\circ\text{C}$ ) | $t_{off}$ | –<br>– | 1.75<br>2.10 | 2.5<br>– | μs |

## SWITCHING CHARACTERISTICS: Inductive Load ( $V_{clamp} = 300 \text{ V}$ , $V_{CC} = 15 \text{ V}$ , $L = 200 \mu\text{H}$ )

|                |                                                                                                                           |          |          |             |           |    |
|----------------|---------------------------------------------------------------------------------------------------------------------------|----------|----------|-------------|-----------|----|
| Fall Time      | ( $I_C = 0.4 \text{ Adc}$ , $I_{B1} = 40 \text{ mAdc}$<br>$I_{B2} = 0.2 \text{ Adc}$ )<br>( $T_C = 125^\circ\text{C}$ )   | $t_{fi}$ | –<br>–   | 125<br>120  | 200<br>–  | ns |
| Storage Time   | ( $T_C = 125^\circ\text{C}$ )                                                                                             | $t_{si}$ | –<br>–   | 0.7<br>0.8  | 1.25<br>– | μs |
| Crossover Time | ( $T_C = 125^\circ\text{C}$ )                                                                                             | $t_c$    | –<br>–   | 110<br>110  | 200<br>–  | ns |
| Fall Time      | ( $I_C = 1.0 \text{ Adc}$ , $I_{B1} = 0.2 \text{ Adc}$<br>$I_{B2} = 0.5 \text{ Adc}$ )<br>( $T_C = 125^\circ\text{C}$ )   | $t_{fi}$ | –<br>–   | 110<br>120  | 175<br>–  | ns |
| Storage Time   | ( $T_C = 125^\circ\text{C}$ )                                                                                             | $t_{si}$ | –<br>–   | 1.7<br>2.25 | 2.75<br>– | μs |
| Crossover Time | ( $T_C = 125^\circ\text{C}$ )                                                                                             | $t_c$    | –<br>–   | 180<br>210  | 300<br>–  | ns |
| Fall Time      | ( $I_C = 0.8 \text{ Adc}$ , $I_{B1} = 160 \text{ mAdc}$<br>$I_{B2} = 160 \text{ mAdc}$ )<br>( $T_C = 125^\circ\text{C}$ ) | $t_{fi}$ | 70<br>–  | –<br>180    | 170<br>–  | ns |
| Storage Time   | ( $T_C = 125^\circ\text{C}$ )                                                                                             | $t_{si}$ | 2.6<br>– | –<br>4.2    | 3.8<br>–  | μs |
| Crossover Time | ( $T_C = 125^\circ\text{C}$ )                                                                                             | $t_c$    | –<br>–   | 190<br>350  | 300<br>–  | ns |

TYPICAL STATIC CHARACTERISTICS

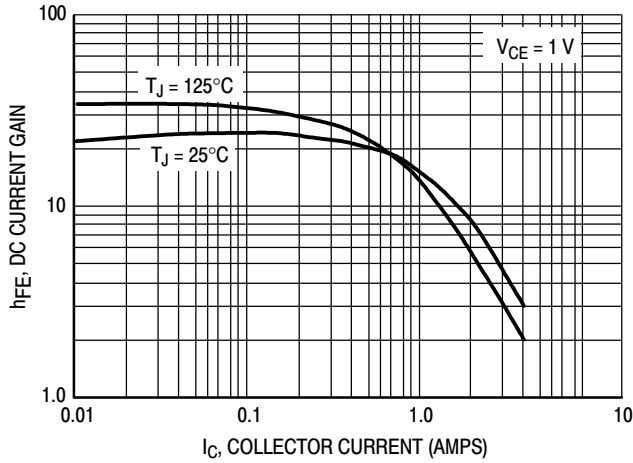


Figure 1. DC Current Gain at 1 Volt

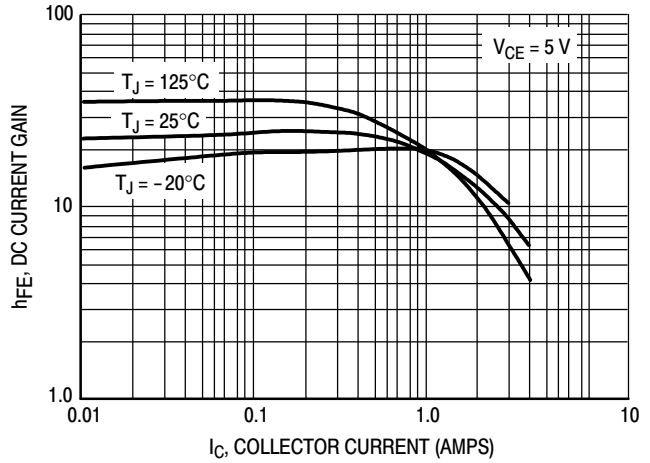


Figure 2. DC Current Gain at 5 Volts

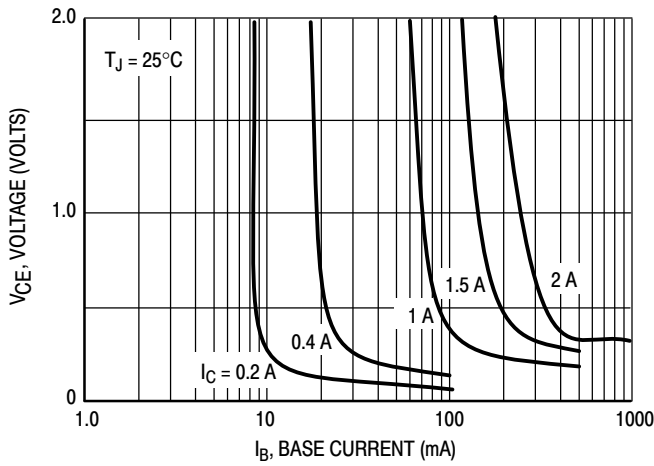


Figure 3. Collector Saturation Region

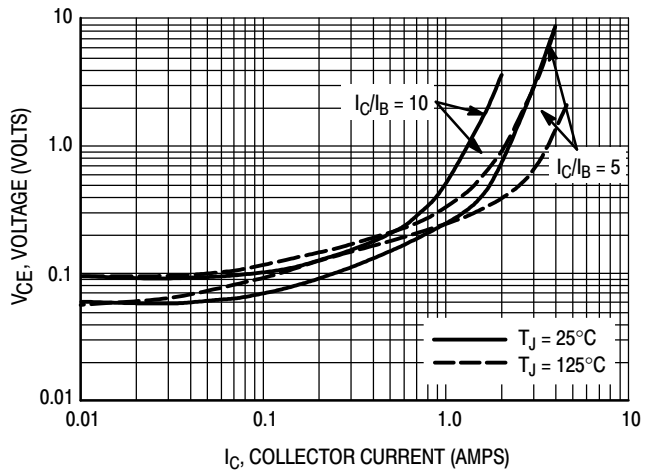


Figure 4. Collector-Emitter Saturation Voltage

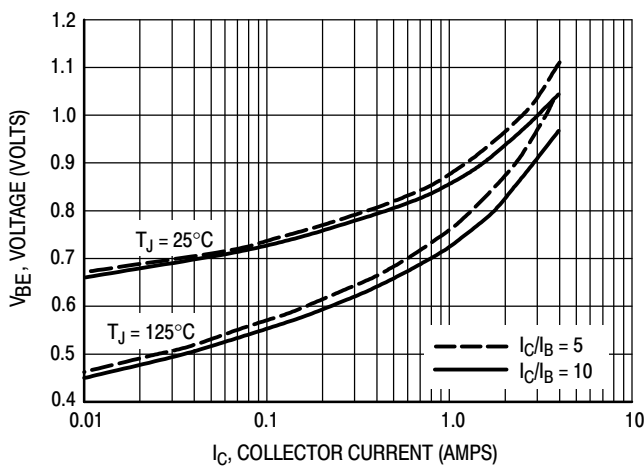


Figure 5. Base-Emitter Saturation Region

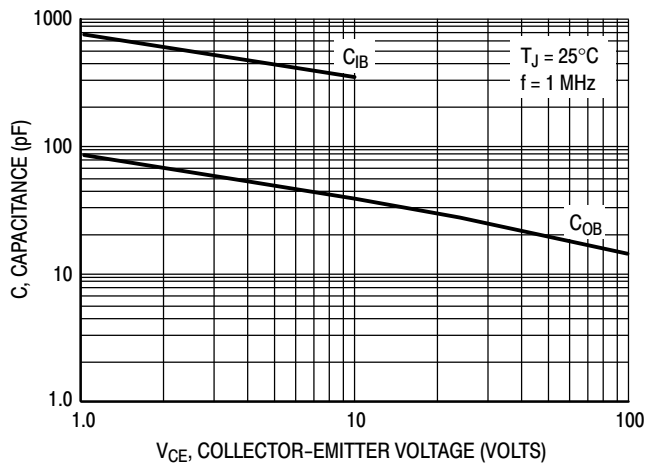


Figure 6. Capacitance

**TYPICAL SWITCHING CHARACTERISTICS**  
( $I_{B2} = I_C/2$  for all switching)

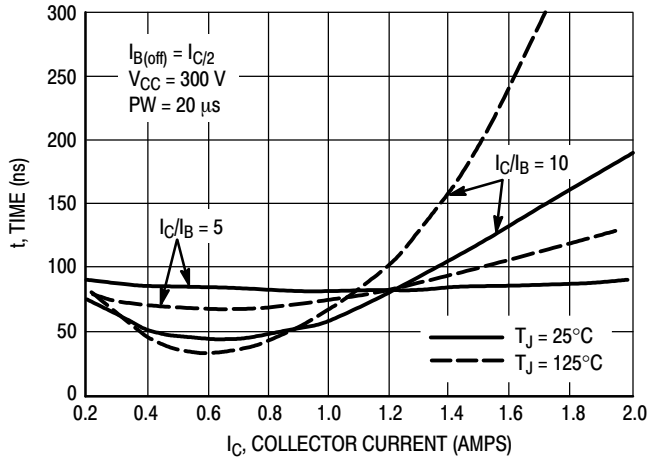


Figure 7. Resistive Switching,  $t_{on}$

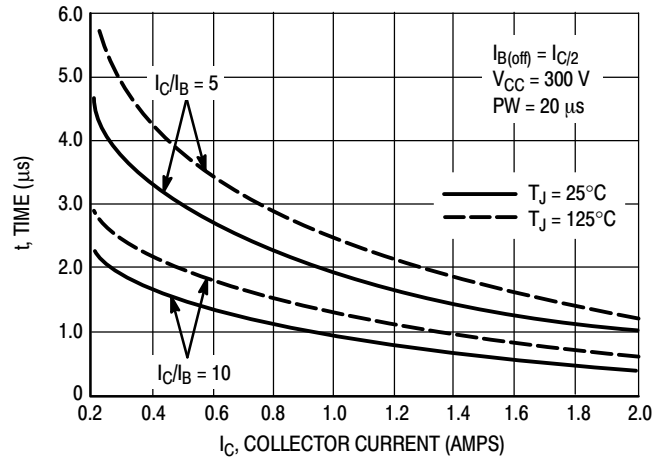


Figure 8. Resistive Switching,  $t_{off}$

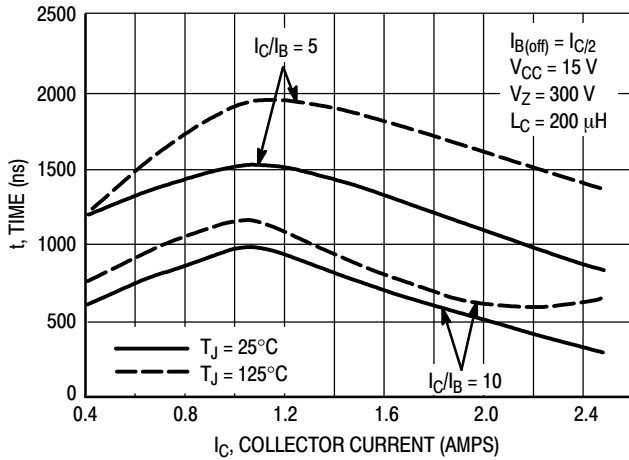


Figure 9. Inductive Storage Time,  $t_{si}$

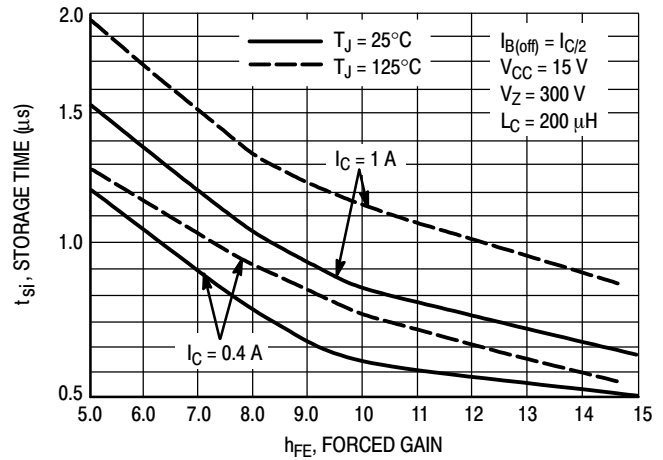


Figure 10. Inductive Storage Time

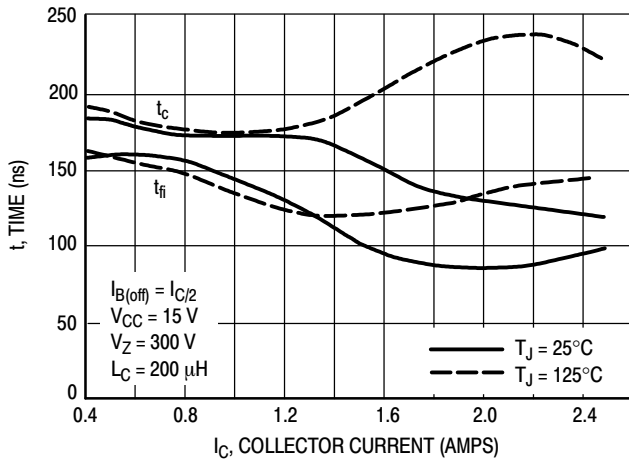


Figure 11. Inductive Switching,  $t_c$  and  $t_{fi}$   $I_C/I_B = 5$

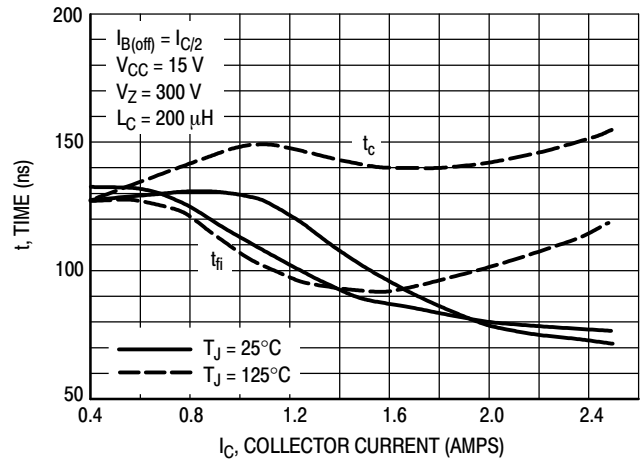


Figure 12. Inductive Switching,  $t_c$  and  $t_{fi}$   $I_C/I_B = 10$

**TYPICAL SWITCHING CHARACTERISTICS**  
( $I_{B2} = I_C/2$  for all switching)

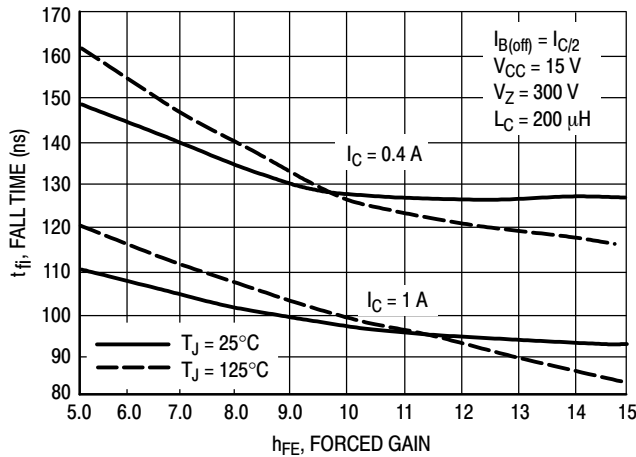


**Figure 13. Inductive Fall Time**

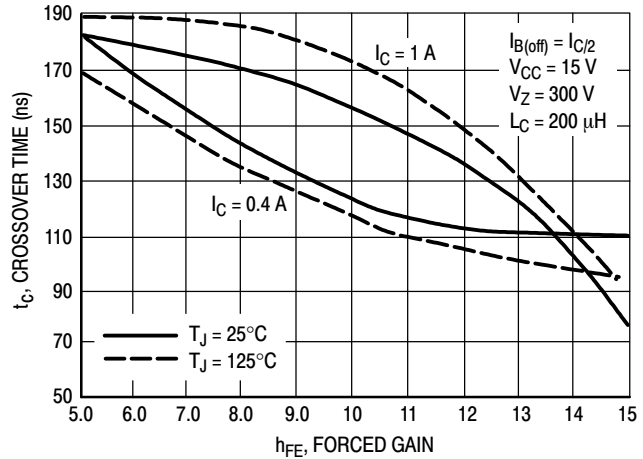


**Figure 14. Inductive Crossover Time**

**GUARANTEED SAFE OPERATING AREA INFORMATION**

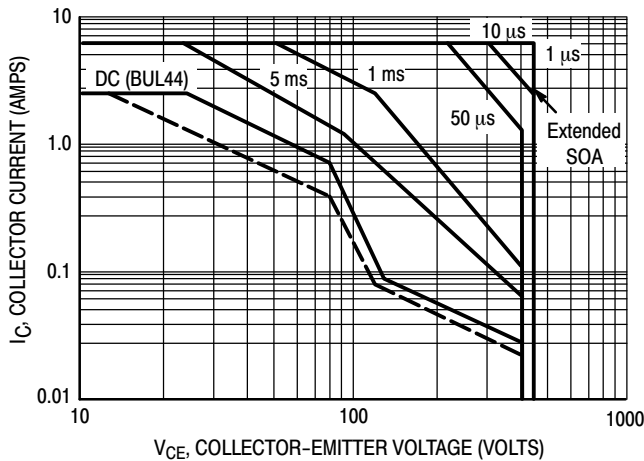


**Figure 15. Forward Bias Safe Operating Area**

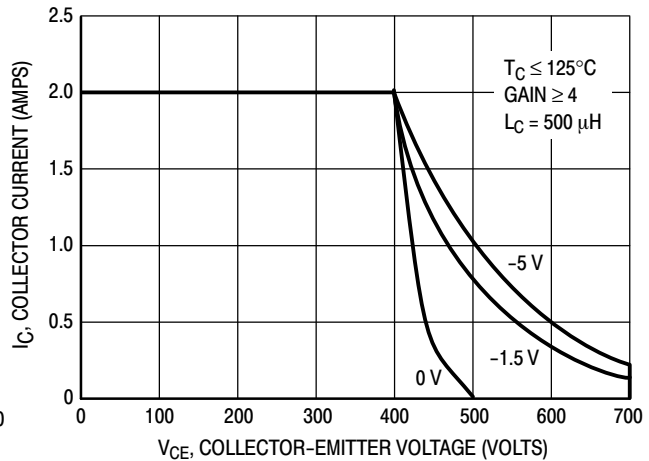


**Figure 16. Reverse Bias Switching Safe Operating Area**

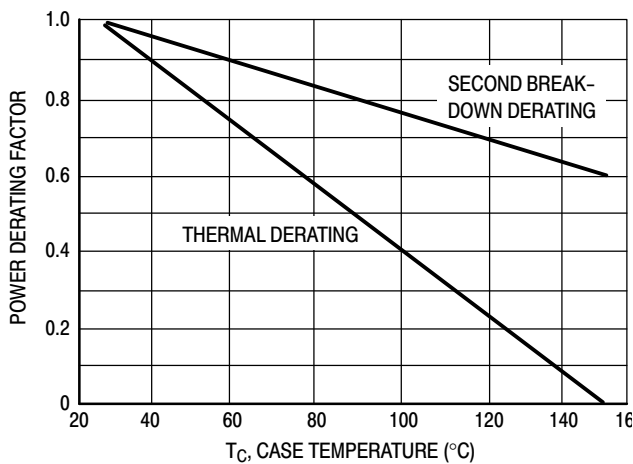


**Figure 17. Forward Bias Power Derating**

There are two limitations on the power handling ability of a transistor: average junction temperature and second breakdown. Safe operating area curves indicate  $I_C$ - $V_{CE}$

limits of the transistor that must be observed for reliable operation; i.e., the transistor must not be subjected to greater dissipation than the curves indicate. The data of figure 15 is based on  $T_C = 25^\circ\text{C}$ ;  $T_{J(PK)}$  is variable depending on power level. Second breakdown pulse limits are valid for duty cycles to 10% but must be derated when  $T_C > 25^\circ\text{C}$ . Second breakdown limitations do not derate the same as thermal limitations. Allowable current at the voltages shown on figure 15 may be found at any case temperature by using the appropriate curve on figure 17.  $T_{J(PK)}$  may be calculated from the data in figure 20. At any case temperatures, thermal limitations will reduce the power than can be handled to values less than the limitations imposed by second breakdown. For inductive loads, high voltage and current must be sustained simultaneously during turn-off with the base-to-emitter junction reverse-biased. The safe level is specified as a reverse-biased safe operating area (Figure 16). This rating is verified under clamped conditions so that the device is never subjected to an avalanche mode.

# BUL44G

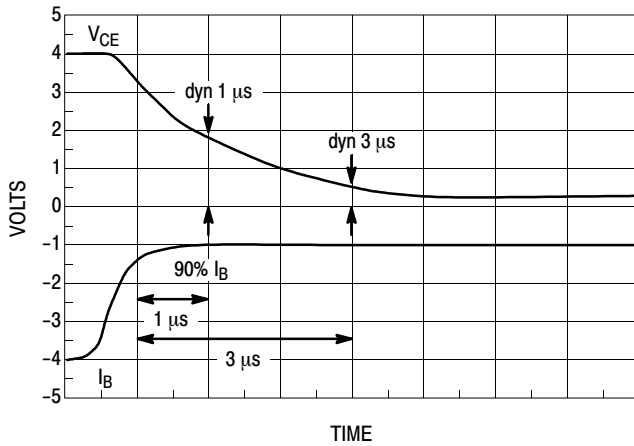


Figure 18. Dynamic Saturation Voltage Measurements

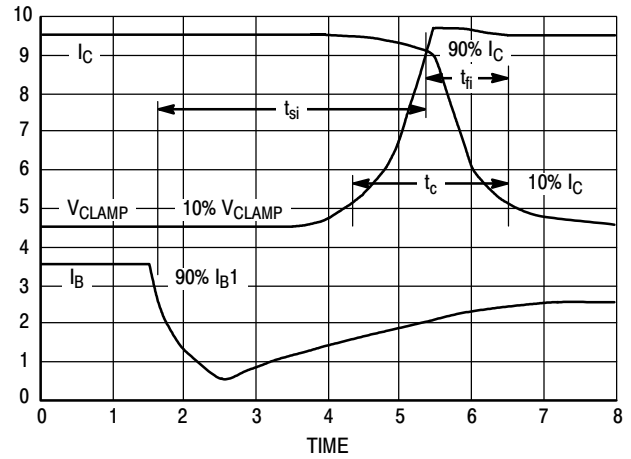


Figure 19. Inductive Switching Measurements

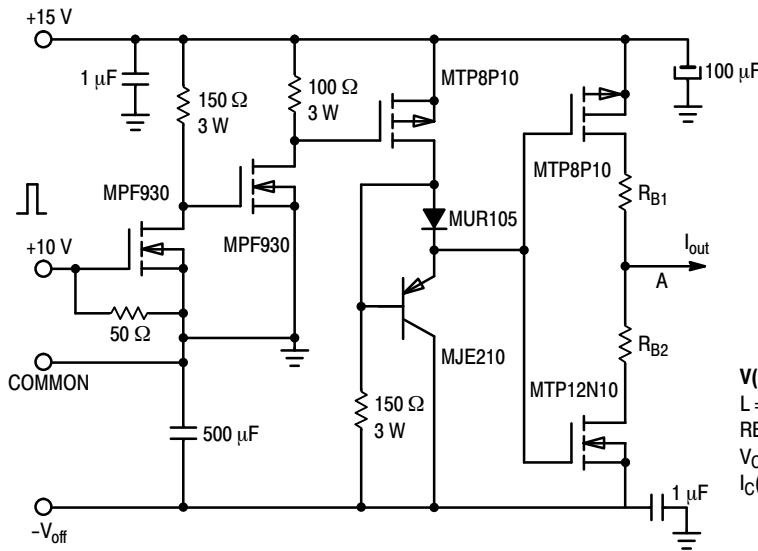


Table 1. Inductive Load Switching Drive Circuit

| V(BR)CEO(sus)               | INDUCTIVE SWITCHING                      | RBSOA                                    |
|-----------------------------|------------------------------------------|------------------------------------------|
| L = 10 mH                   | L = 200 μH                               | L = 500 μH                               |
| RB2 = ∞                     | RB2 = 0                                  | RB2 = 0                                  |
| V <sub>CC</sub> = 20 VOLTS  | V <sub>CC</sub> = 15 VOLTS               | V <sub>CC</sub> = 15 VOLTS               |
| I <sub>C(pk)</sub> = 100 mA | RB1 SELECTED FOR DESIRED I <sub>B1</sub> | RB1 SELECTED FOR DESIRED I <sub>B1</sub> |

## TYPICAL THERMAL RESPONSE


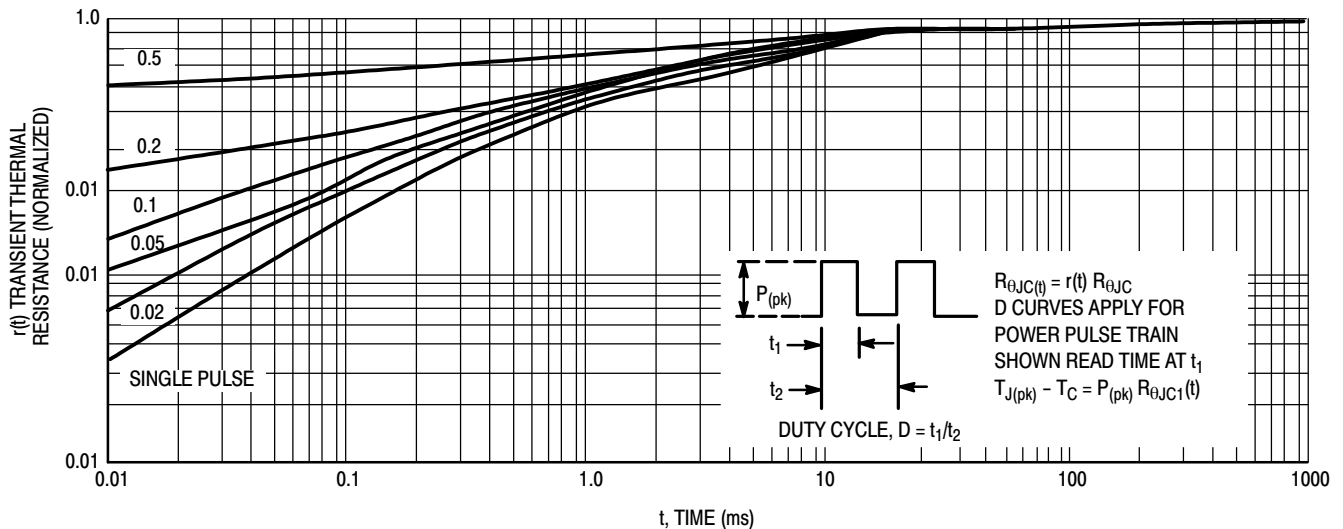


Figure 20. Typical Thermal Response ( $Z_{\theta JC}(t)$ ) for BUL44

# BUL44G

## PACKAGE DIMENSIONS

### TO-220AB CASE 221A-09 ISSUE AF

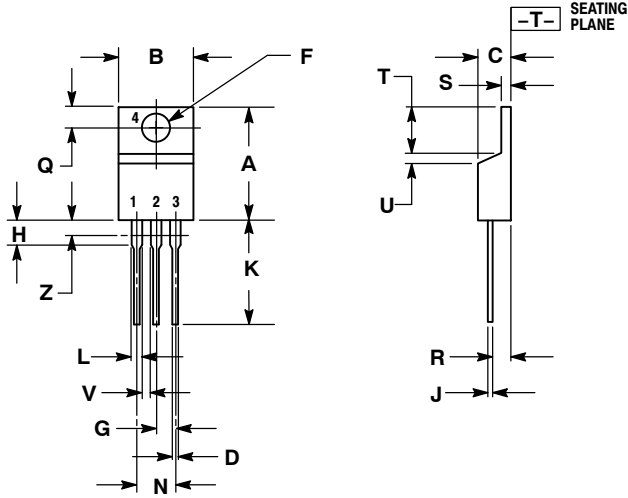

#### NOTES:

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. DIMENSION Z DEFINES A ZONE WHERE ALL BODY AND LEAD IRREGULARITIES ARE ALLOWED.

| DIM | INCHES |       | MILLIMETERS |       |
|-----|--------|-------|-------------|-------|
|     | MIN    | MAX   | MIN         | MAX   |
| A   | 0.570  | 0.620 | 14.48       | 15.75 |
| B   | 0.380  | 0.405 | 9.66        | 10.28 |
| C   | 0.160  | 0.190 | 4.07        | 4.82  |
| D   | 0.025  | 0.035 | 0.64        | 0.88  |
| F   | 0.142  | 0.161 | 3.61        | 4.09  |
| G   | 0.095  | 0.105 | 2.42        | 2.66  |
| H   | 0.110  | 0.155 | 2.80        | 3.93  |
| J   | 0.014  | 0.025 | 0.36        | 0.64  |
| K   | 0.500  | 0.562 | 12.70       | 14.27 |
| L   | 0.045  | 0.060 | 1.15        | 1.52  |
| N   | 0.190  | 0.210 | 4.83        | 5.33  |
| Q   | 0.100  | 0.120 | 2.54        | 3.04  |
| R   | 0.080  | 0.110 | 2.04        | 2.79  |
| S   | 0.045  | 0.055 | 1.15        | 1.39  |
| T   | 0.235  | 0.255 | 5.97        | 6.47  |
| U   | 0.000  | 0.050 | 0.00        | 1.27  |
| V   | 0.045  | ---   | 1.15        | ---   |
| Z   | ---    | 0.080 | ---         | 2.04  |

#### STYLE 1:

1. BASE
2. COLLECTOR
3. EMITTER
4. COLLECTOR

SWITCHMODE is a trademark of Semiconductor Components Industries, LLC.

ON Semiconductor and  are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## PUBLICATION ORDERING INFORMATION

### LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor  
P.O. Box 5163, Denver, Colorado 80217 USA  
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada  
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada  
Email: [orderlit@onsemi.com](mailto:orderlit@onsemi.com)

N. American Technical Support: 800-282-9855 Toll Free  
USA/Canada

Europe, Middle East and Africa Technical Support:  
Phone: 421 33 790 2910

Japan Customer Focus Center  
Phone: 81-3-5773-3850

ON Semiconductor Website: [www.onsemi.com](http://www.onsemi.com)

Order Literature: <http://www.onsemi.com/orderlit>

For additional information, please contact your local  
Sales Representative