
High Voltage Rectifiers

V_{RRM} = 4800 V
$I_{F(AV)M}$ = 10.2 A

V_{RRM} V	Standard Types	Power Designation
4800	UGE 0221 AY4	Si-E 1750 / 775-4





Symbol	Conditions		Maximum Ratings	
$I_{F(RMS)}$			16	A
$I_{F(AV)M}$	air self cooling;	T_{amb} = 45°C		
		- without cooling plate	3.8	A
		- with colling plate	5.4	A
	forced air cooling; v = 3 m/s,	T_{amb} = 35°C		
		- without cooling plate	7.0	A
		- with colling plate	10.2	A
	oil cooling;			
		T_{amb} = 35°C		
		- without cooling plate	10.2	A
		- with colling plate	10.2	A
P_{RSM}	T_{VJ} = 150°C;	t_p = 10 µs	3.4	kW
I_{FSM}	non repetitive, 50 c/s (for 60 c/s add 10%)			
	T_{VJ} = 45°C;	t_p = 10 ms	180	A
	T_{VJ} = 150°C;	t_p = 10 ms	140	A
T_{VJ}			-40...+150	°C
T_{stg}			-40...+150	°C
T_{VJM}			150	°C
Weight			120	g

Symbol	Conditions		Characteristic Values	
I_R	$V_R = V_{RRM}$	T_{VJ} = 150°C	≤ 2	mA
V_F	I_F = 30 A	T_{VJ} = 25°C	4.8	V
V_{T0}		T_{VJ} = 150°C	2,55	V
r_T		T_{VJ} = 150°C	90	mΩ
a	f = 50Hz		5 x 9.81	m/s^2
M_d			8	Nm


Data according to IEC 60747-2

Features
- Hermetically sealed Epoxy
- Use in oil
- Avalanche characteristics

Applications
- X-Ray equipment
- Electrostatic dust precipitators
- Electronic beam welding
- Lasers
- Cable test equipment

Advantages
- Simple mounting
- Improved temperature and power cycling
- Reduced protection circuits
- Series and parallel operation

Dimensions in mm (1 mm = 0.0394")

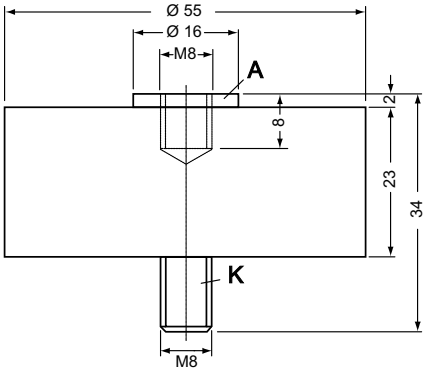

Disclaimer Notice

Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

IXYS reserve the right to change limits, test conditions and dimensions.

© 2020 IXYS All rights reserved

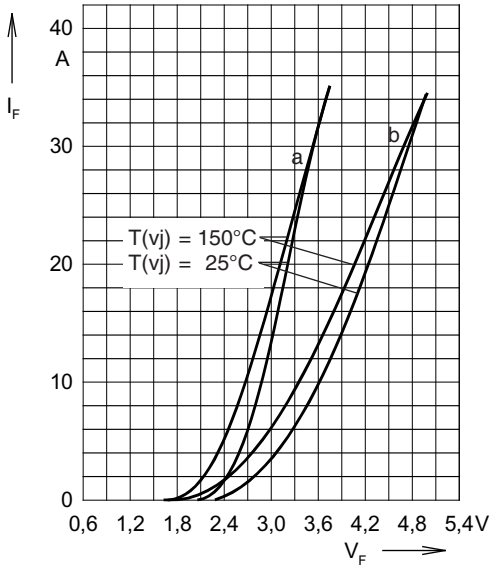


Fig. 1: **Forward characteristics**
Instantaneous forward current I_F as a function of instantaneous forward voltage drop V_F for junction temperature $T_{(vj)}$ = 25°C and $T_{(vj)}$ = 150°C
a = Mean value characteristic
b = Limit value characteristic

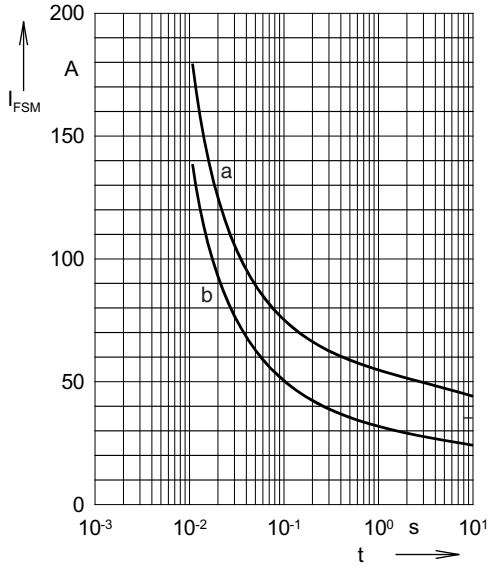


Fig. 2: **Characteristics of maximum permissible current**
The curves show the non repetitive peak one cycle surge forward current I_{FSM} as a function of time *t* and serve for rating protective devices.
a = Initial state $T_{(vj)}$ = 45°C
b = Initial state $T_{(vj)}$ = 150°C

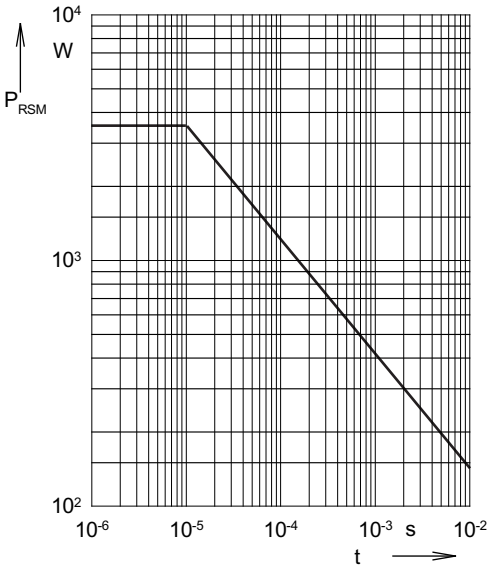


Fig. 3: **Power loss**
Non repetitive peak reverse power loss P_{RSM} as a function of time *t*, $T_{(vj)}$ = 150°C

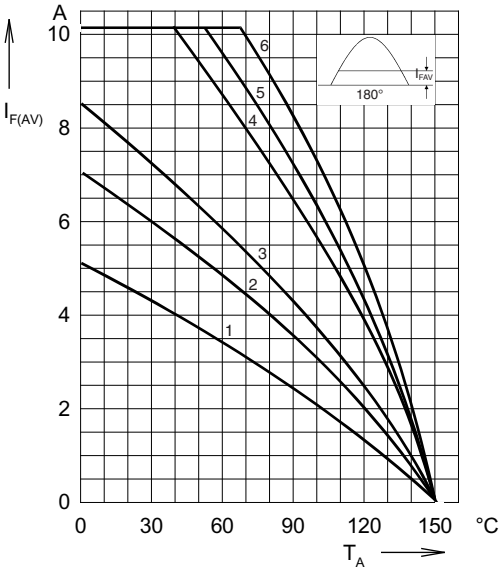


Fig. 4: **Load diagramm**
Mean forward current $I_{F(AV)}$ of one module for a sine half wave for various cooling modes as a function of the cooling medium temperature T_{amb} for a resistive load (horizontal mounting).

Cooling modes

1 =	air self cooling	without	cooling plate
2 =	air self cooling	with	cooling plate
3 =	forced air cooling	without	cooling plate
4 =	forced air cooling	with	cooling plate
5	= oil cooling	without	cooling plate
6 =	oil cooling	with	cooling plate

IXYS reserve the right to change limits, test conditions and dimensions.

© 2020 IXYS All rights reserved