fab.pho - Mon Jun 25 06:42:02 2007

REVISIONS			
REV	DESCRIPTION	APPR	DATE

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
   2 OZ. COPPER FINISH ON OUTER LAYERS.
   1 OZ. COPPER FINISH ON INNER LAYERS.
   THICKNESS .062 +/-.006 TOTAL OF 4 LAYERS.
   FLAMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.
   0.00 ARE PRIMARY DATUMS.
4. DRILLLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
   HOLE LOCATION TOLERANCES ARE +/-.003 INCH IN RELATION TO CENTER
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.
   WHITE TIN IMMERSION (OMIKRON) BOTH SIDES.
6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
8. LAYER 2 AND LAYER 3 ARE IDENTICAL.
9. SCORING:(FOR PRODUCTION BOARD ORDER)



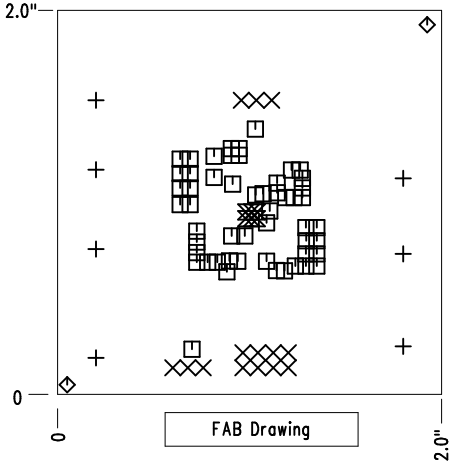

SIZE	QTY	SYM	PLTD
95	7	+	PLTD
35	14	X	PLTD
15	53	□	PLTD
70	2	◇	NPLTD
10	6	⧖	PLTD

FAB DRAWING

APPROVALS		
	INIT	DATE
DRAWN		
CHECK		
DESIGN	JUNE WU	1/10/07
ENGR	TOM G.	1/10/07
SCALE = NONE		

LINEAR TECHNOLOGY
1630 McCarthy Blvd.
Milpitas, CA 95035
PH: (408)432-1900

TITLE: LTC3568EDD
1.8A Monolithic Synchronous Buck Regulator

SIZE	DEMO	REV.
	DC1206A	A
REV 1		SHT 1 of 1