STL13N60DM2

N-channel 600 V, 0.350 Ω typ., 8 A MDmesh™ DM2 Power MOSFET in a PowerFLAT™ 5x6 HV package

Datasheet - production data

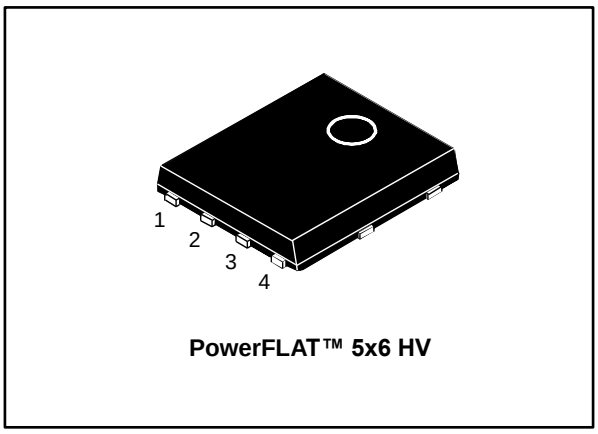

Figure 1: Internal schematic diagram

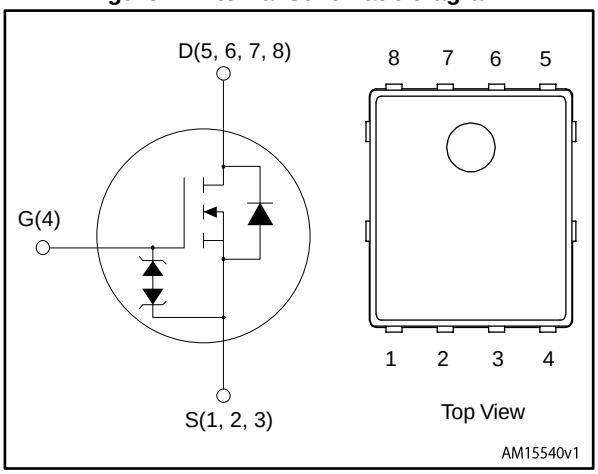

Features

Order code	V_{DS}	$R_{DS(on)}$ max.	I_D
STL13N60DM2	600 V	0.370 Ω	8 A

- Fast-recovery body diode
- Extremely low gate charge and input capacitance
- Low on-resistance
- 100% avalanche tested
- Extremely high dv/dt ruggedness
- Zener-protected

Applications

- Switching applications

Description

This high voltage N-channel Power MOSFET is part of the MDmesh™ DM2 fast recovery diode series. It offers very low recovery charge (Q_{rr}) and time (t_{rr}) combined with low $R_{DS(on)}$, rendering it suitable for the most demanding high efficiency converters and ideal for bridge topologies and ZVS phase-shift converters.

Table 1: Device summary

Order code	Marking	Package	Packing
STL13N60DM2	13N60DM2	PowerFLAT™ 5x6 HV	Tape and reel

This is information on a product in full production.

www.st.com

Contents

1 Electrical ratings 3
2 Electrical characteristics 4
2.1 Electrical characteristics (curves) 6
3 Test circuits 8
4 Package mechanical data 9
4.1 PowerFLAT™ 5x6 HV package information 10
4.2 Packing information 12
5 Revision history 14

1 Electrical ratings

Table 2: Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{GS}	Gate-source voltage	± 25	V
I_D	Drain current (continuous) at T_C = 25 °C	8(1)	A
I_D	Drain current (continuous) at T_C= 100 °C	5	A
I_{DM}(2)	Drain current (pulsed)	32	A
P_{TOT}	Total dissipation at T_C = 25 °C	52	W
dv/dt(3)	Peak diode recovery voltage slope	40	V/ns
dv/dt(4)	MOSFET dv/dt ruggedness	50	V/ns
T_{stg}	Storage temperature range	- 55 to 150	°C
T_j	Operating junction temperature range	150	

Notes:

(1)The value is limited by package.

(2)Pulse width limited by safe operating area.

(3)I_{SD} ≤ 8 A, di/dt ≤ 400 A/µs; $V_{DS\ peak}$ < $V_{(BR)DSS}$, V_{DD} = 400 V

(4)V_{DS} ≤ 480 V

Table 3: Thermal data

Symbol	Parameter	Value	Unit
$R_{thj\text{-}case}$	Thermal resistance junction-case max	2.40	°C/W
$R_{thj\text{-}pcb}$	Thermal resistance junction-pcb max(1)	59	°C/W

Notes:

(1)When mounted on 1 inch^2 FR-4, 2 Oz copper board

Table 4: Avalanche characteristics

Symbol	Parameter	Value	Unit
I_{AR}	Avalanche current, repetetive or not repetetive (pulse width limited by T_{jmax})	2.5	A
E_{AS}	Single pulse avalanche energy (starting T_j = 25 °C, I_D = I_{AR}, V_{DD} = 50 V)	340	mJ

2 Electrical characteristics

(T_C= 25 °C unless otherwise specified)

Table 5: On/off states

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source breakdown voltage	V_{GS} = 0 V, I_D = 1 mA	600			V
I_{DSS}	Zero gate voltage Drain current	V_{GS} = 0 V, V_{DS} = 600 V			1.5	µA
		V_{GS} = 0 V, V_{DS} = 600 V, T_C = 125 °C(1)			100	µA
I_{GSS}	Gate-body leakage current	V_{DS} = 0 V, V_{GS} = ±25 V			±10	µA
$V_{GS(th)}$	Gate threshold voltage	V_{DS} = V_{GS}, I_D = 250 µA	3	4	5	V
$R_{DS(on)}$	Static drain-source on-resistance	V_{GS} = 10 V, I_D = 4 A		0.350	0.370	Ω

Notes:

(1)Defined by design, not subject to production test.

Table 6: Dynamic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input capacitance	V_{DS}= 100 V, f = 1 MHz, V_{GS} = 0 V	-	730	-	pF
C_{oss}	Output capacitance		-	38	-	pF
C_{rss}	Reverse transfer capacitance		-	0.9	-	pF
$C_{oss\ eq.}$(1)	Equivalent output capacitance	V_{DS} = 0 V to 480 V, V_{GS} = 0 V	-	70	-	pF
R_G	Intrinsic gate resistance	f = 1 MHz, I_D=0 A	-	5.1	-	Ω
Q_g	Total gate charge	V_{DD} = 480 V, I_D = 11 A, V_{GS} = 10 V (see *Figure 15: "Test circuit for gate charge behavior"*)	-	19	-	nC
Q_{gs}	Gate-source charge		-	4.4	-	nC
Q_{gd}	Gate-drain charge		-	9.9	-	nC

Notes:

(1)$C_{oss\ eq.}$ is defined as a constant equivalent capacitance giving the same charging time as C_{oss} when V_{DS} increases from 0 to 80% V_{DSS}

Table 7: Switching times

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	V_{DD} = 300 V, I_D = 5.5 A R_G = 4.7 Ω, V_{GS} = 10 V (see *Figure 14: "Test circuit for resistive load switching times"* and *Figure 19: "Switching time waveform"*)	-	12.3	-	ns
t_r	Rise time		-	4.8	-	ns
$t_{d(off)}$	Turn-off-delay time		-	42.5	-	ns
t_f	Fall time		-	10.6	-	ns

Table 8: Source drain diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{SD}	Source-drain current		-		8	A
I_{SDM} (1)	Source-drain current (pulsed)		-		32	A
V_{SD} (2)	Forward on voltage	V_{GS} = 0 V, I_{SD} = 8 A	-		1.6	V
t_{rr}	Reverse recovery time	I_{SD} = 11 A, di/dt = 100 A/µs, V_{DD} = 60 V (see *Figure 16: "Test circuit for inductive load switching and diode recovery times"*)	-	90		ns
Q_{rr}	Reverse recovery charge		-	252		nC
I_{RRM}	Reverse recovery current		-	5.6		A
t_{rr}	Reverse recovery time	I_{SD} = 11 A, di/dt = 100 A/µs, V_{DD} = 60 V, T_j = 150 °C (see *Figure 16: "Test circuit for inductive load switching and diode recovery times"*)	-	170		ns
Q_{rr}	Reverse recovery charge		-	667		ns
I_{RRM}	Reverse recovery current		-	8.6		A

Notes:

(1)Pulse width is limited by safe operating area

(2)Pulse test: pulse duration = 300 µs, duty cycle 1.5%

Table 9: Gate-source Zener diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)GSO}$	Gate-source breakdown voltage	I_{GS} = ± 1 mA, I_D = 0 A	±30	-	-	V

The built-in back-to-back Zener diodes are specifically designed to enhance the ESD performance of the device. The Zener voltage facilitates efficient and cost-effective device integrity protection, thus eliminating the need for additional external componentry.

2.1 Electrical characteristics (curves)

Figure 2: Safe operating area

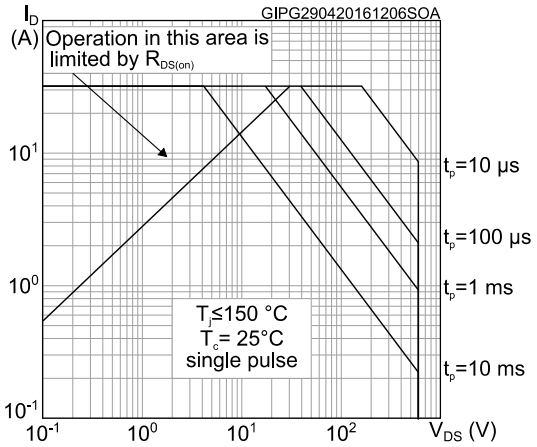

Figure 3: Thermal impedance

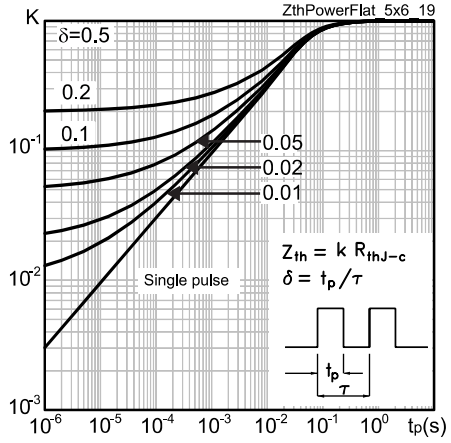

Figure 4: Output characteristics

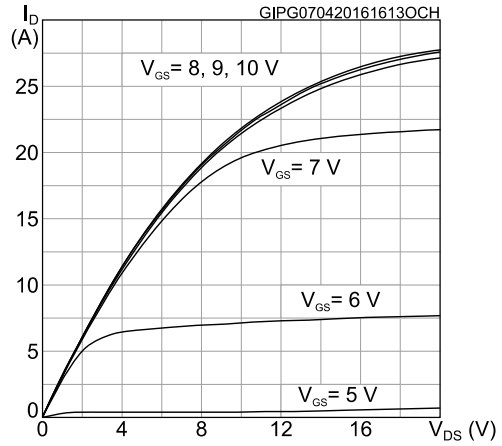

Figure 5: Transfer characteristics

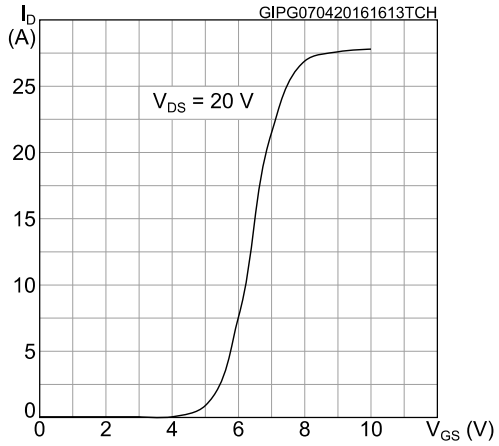

Figure 6: Gate charge vs gate-source voltage

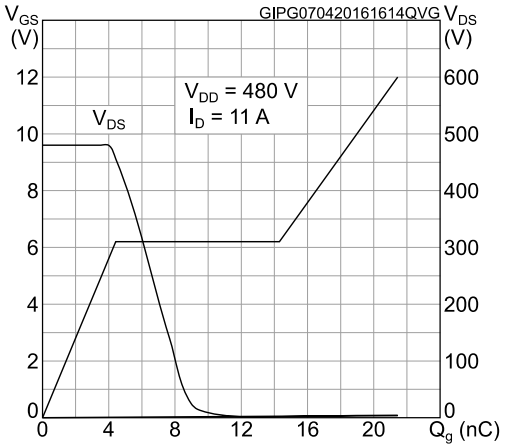

Figure 7: Static drain-source on-resistance

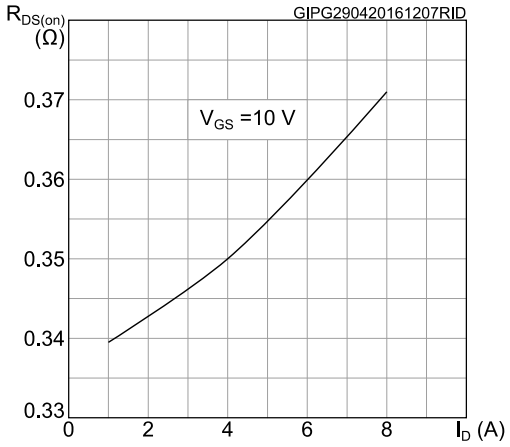

Figure 8: Capacitance variations

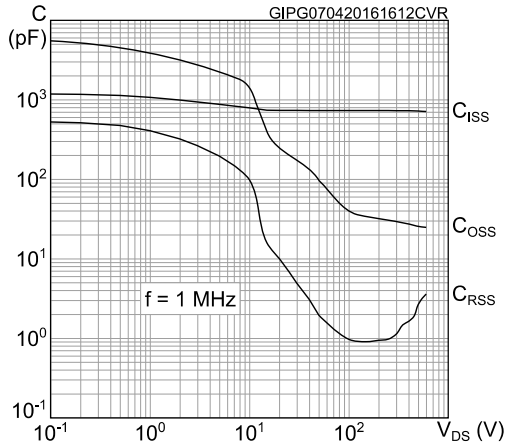

Figure 9: Normalized gate threshold voltage vs temperature

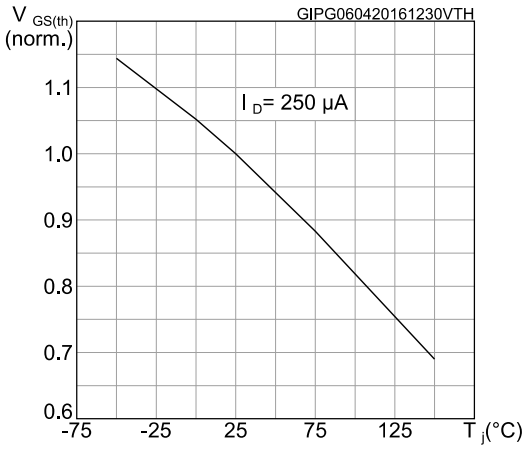

Figure 10: Normalized on-resistance vs temperature

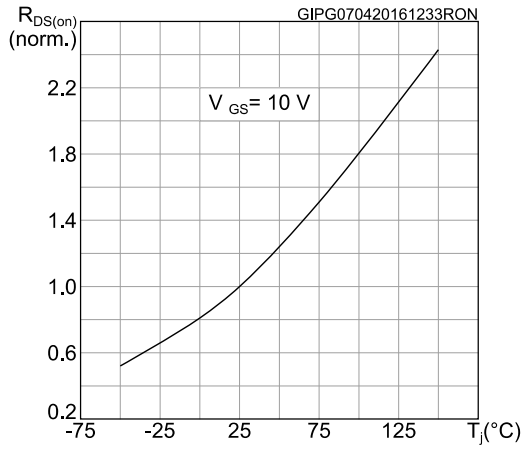

Figure 11: Normalized V(BR)DSS vs temperature

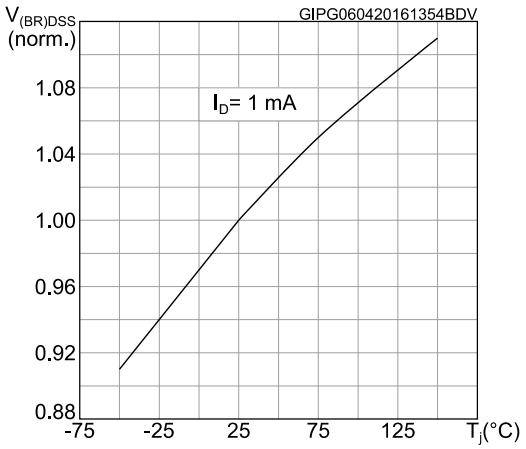

Figure 12: Source-drain diode forward characteristics

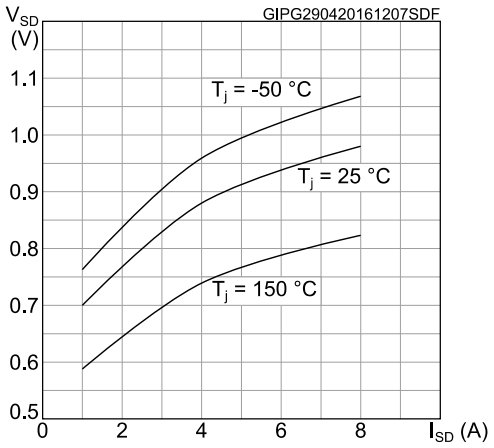

Figure 13: Output capacitance stored energy

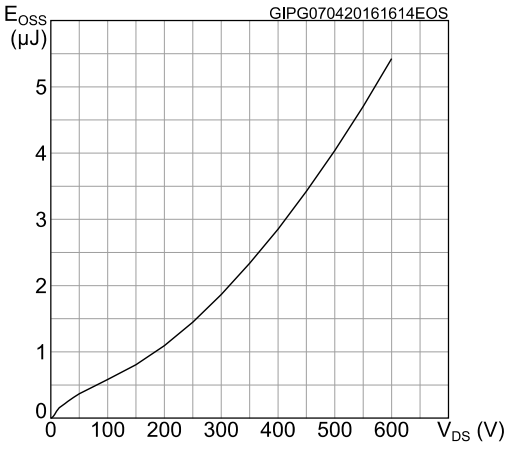

3 Test circuits

Figure 14: Test circuit for resistive load switching times

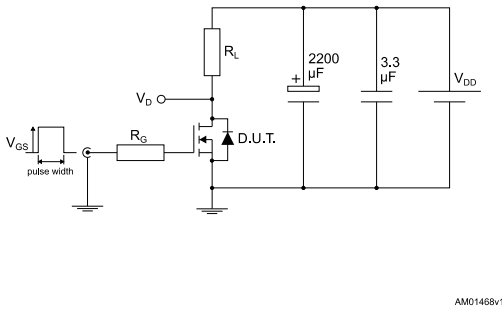

Figure 15: Test circuit for gate charge behavior

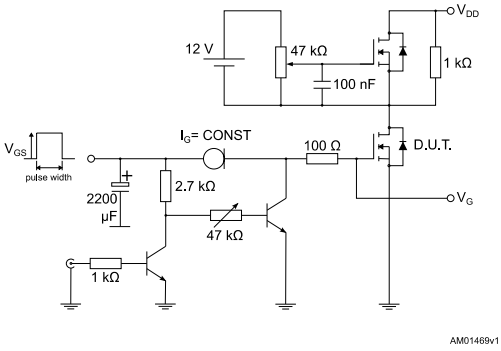

Figure 16: Test circuit for inductive load switching and diode recovery times

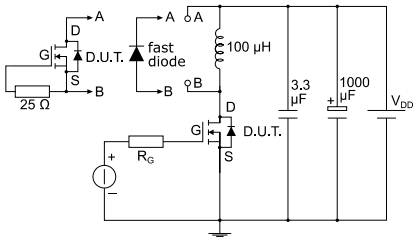

Figure 17: Unclamped inductive load test circuit

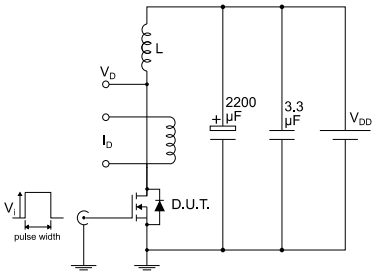

Figure 18: Unclamped inductive waveform

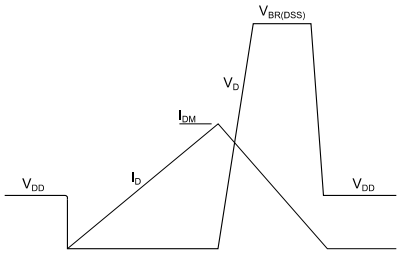

Figure 19: Switching time waveform

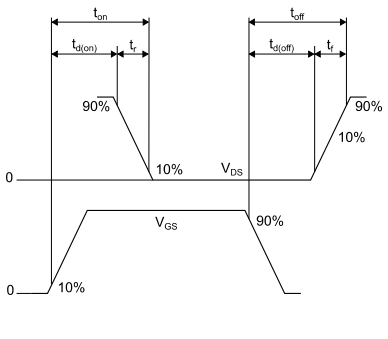

4 Package mechanical data

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: ***www.st.com***. ECOPACK® is an ST trademark.

4.1 PowerFLAT™ 5x6 HV package information

Figure 20: PowerFLAT™ 5x6 HV package outline

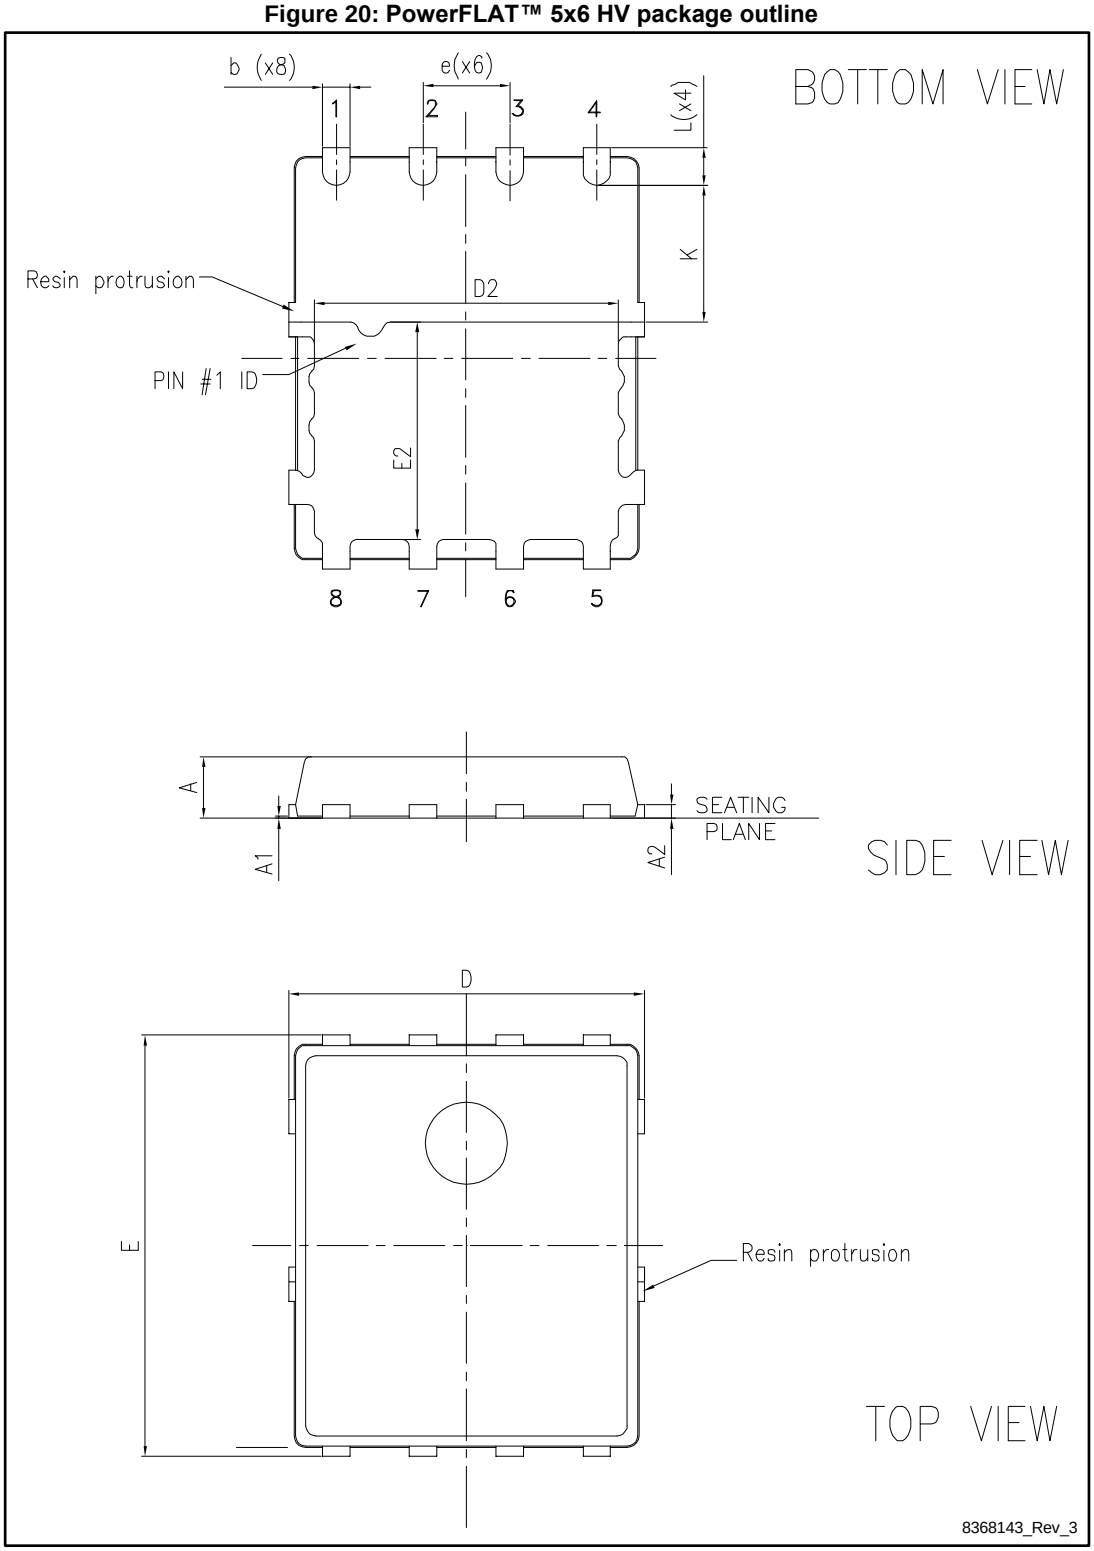

Table 10: PowerFLAT™ 5x6 HV mechanical data

Dim.	mm		
	Min.	Typ.	Max.
A	0.80		1.00
A1	0.02		0.05
A2		0.25	
b	0.30		0.50
D	5.10	5.20	5.30
E	6.05	6.15	6.25
E2	3.10	3.20	3.30
D2	4.30	4.40	4.50
e		1.27	
L	0.50	0.55	0.60
K	1.90	2.00	2.10

Figure 21: PowerFLAT™ 5x6 HV recommended footprint (dimensions are in mm)

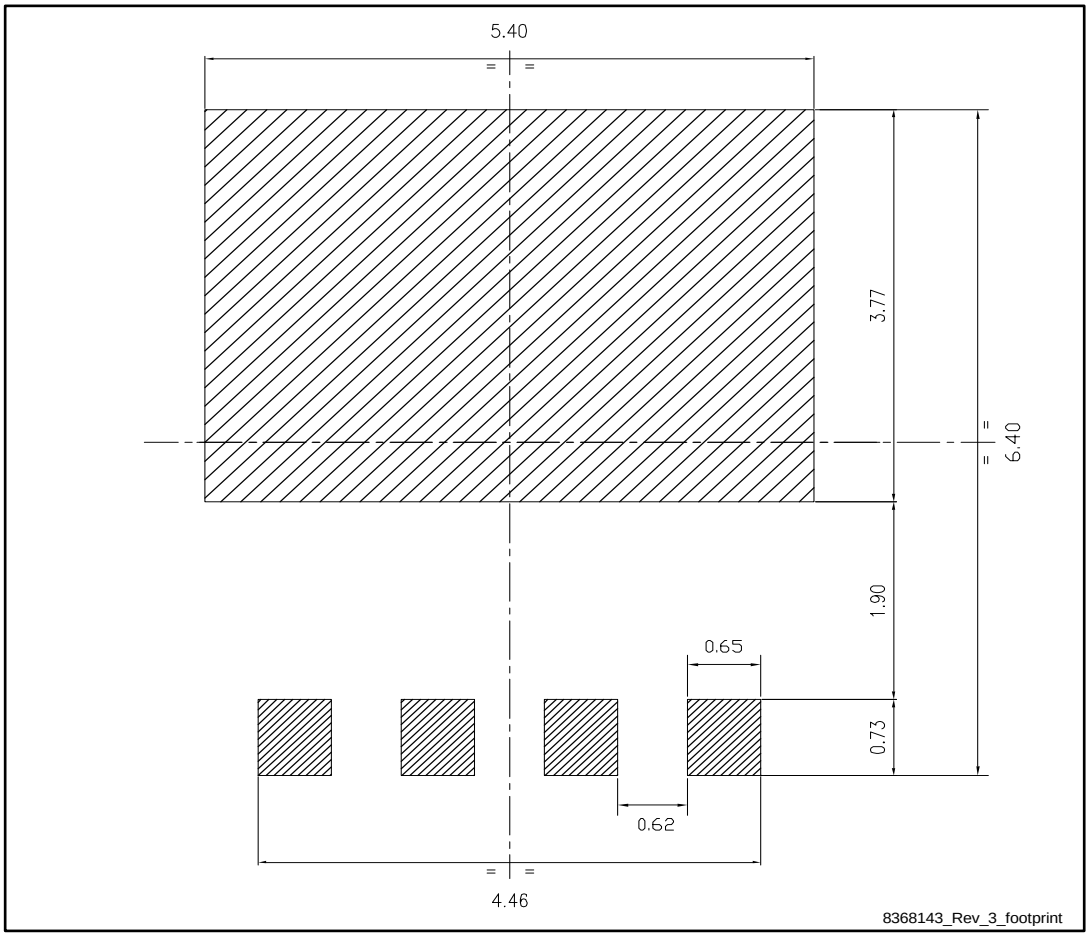

4.2 Packing information

Figure 22: PowerFLAT™ 5x6 tape (dimensions are in mm)

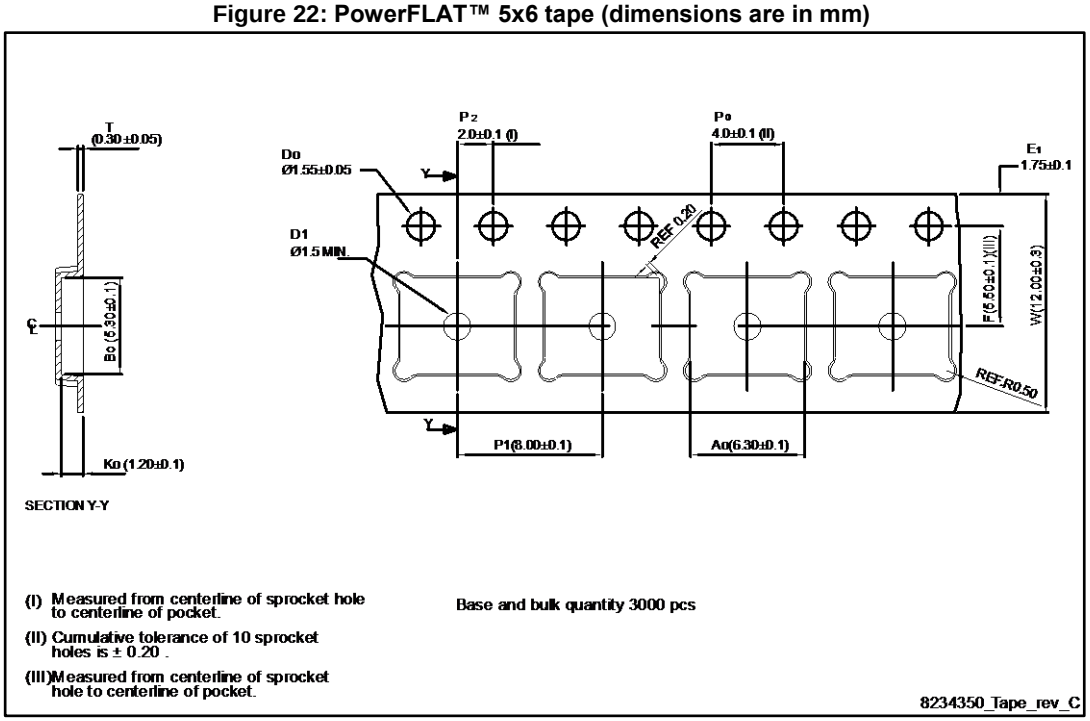

Figure 23: PowerFLAT™ 5x6 package orientation in carrier tape

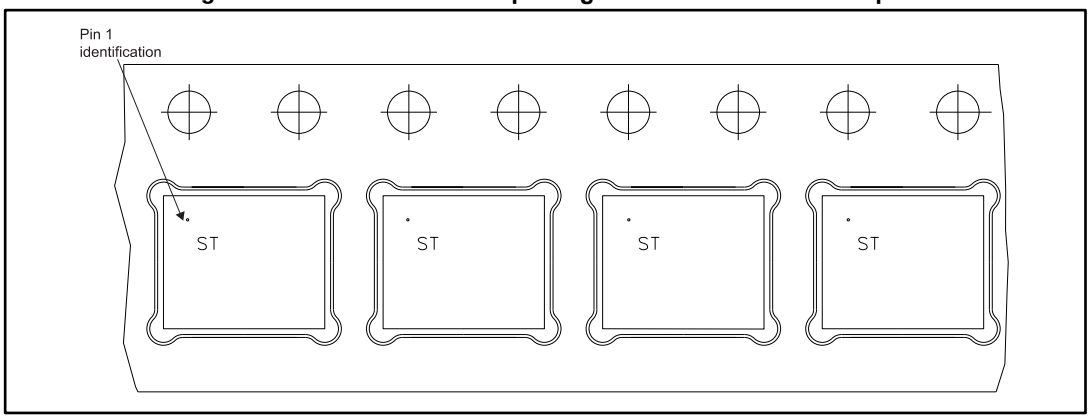

Figure 24: PowerFLAT™ 5x6 reel

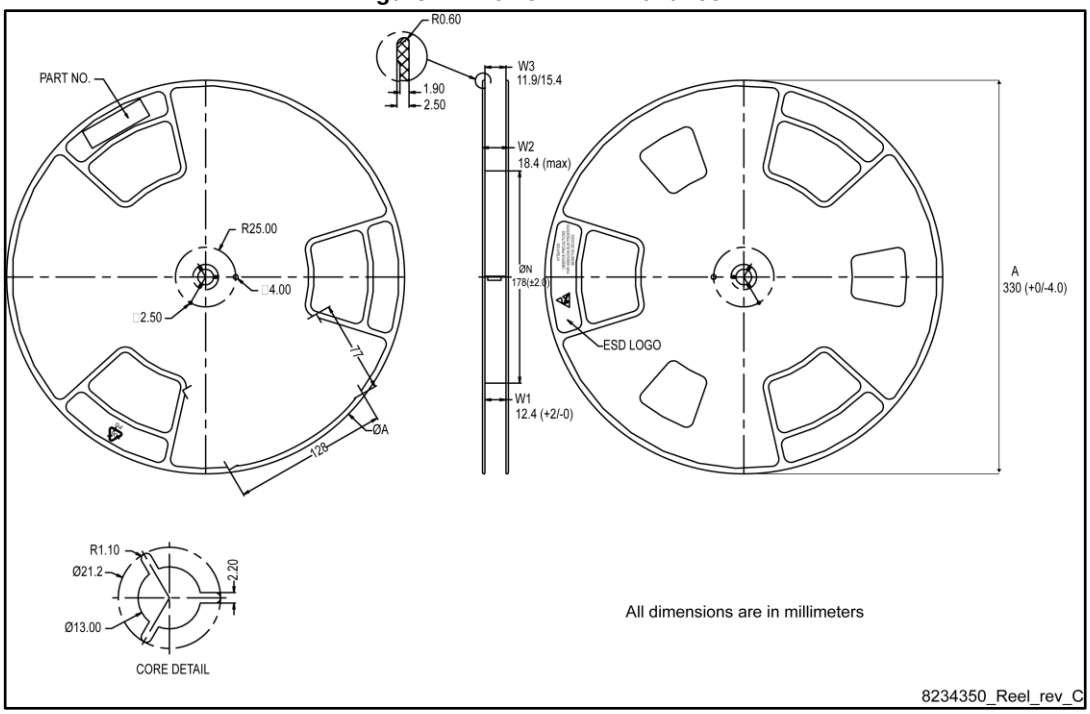

5 Revision history

Table 11: Document revision history

Date	Revision	Changes
02-May-2016	1	First release.
07-Dec-2016	2	Document status promoted from preliminary to production data.

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2016 STMicroelectronics – All rights reserved