

TPS566235EVM-036 evaluation module

This user's guide contains the information for TPS566235EVM-036 evaluation module as well as TPS566235 DC/DC converter. Also included are the specification, schematic, printed-circuit board (PCB) layout, hardware setup, and list of materials.

Contents

1	Introduction	2
2	Specification Summary.....	2
3	Modifications.....	2
	3.1 Output Voltage Setpoint.....	2
	3.2 Mode Selection.....	3
4	Schematic and Board layout	3
	4.1 Schematic.....	3
	4.2 Board Layout	3
5	EVM Test Setup.....	6
	5.1 Connectors and Jumpers Description and Placement	6
	5.2 Start-up Procedure	9
6	Test Waveforms.....	9
	6.1 Power up.....	9
	6.2 Power down	9
	6.3 Output Voltage Ripple	10
	6.4 Load Transient Response.....	11
	6.5 Thermal	12
7	List of Materials and Reference	12
	7.1 List of Materials.....	13
	7.2 Reference	13

List of Figures

1	TPS566235EVM-036 Evaluation Module Schematic	3
2	Component Placement (Top Layer)	4
3	Board Layout (Top Layer)	4
4	Board Layout (Second Layer).....	5
5	Board Layout (Third Layer).....	5
6	Board Layout (Bottom Layer)	6
7	Connectors and Jumpers Placement (Top View)	7
8	Connectors and Jumpers Placement (Bottom View).....	8
9	Power up with 6 A loading controlled by EN pin.....	9
10	Power Down with 6-A Loading Controlled by EN Pin	10
11	V_{OUT} Ripple with 0-A Loading	10
12	V_{OUT} Ripple with 6-A Loading	11
13	Load Transient Response from 0 A to 6 A with $R_6 = 0 \Omega$ and $C_{13} = 100 \text{ pF}$	11
14	Load Transient Response from 1.2 A to 4.8 A with $R_6 = 0 \Omega$ and $C_{13} = 100 \text{ pF}$	12
15	Thermal Information at 6-A Full Loading	12

List of Tables

1	TPS566235EVM-036 Specifications Summary	2
2	MODE Pin Resistor Setting	3
3	Connectors and Test Points Description	8
4	List of Materials	13

Trademarks

1 Introduction

TPS566235 device is a high efficiency, cost effective, synchronous BUCK DC/DC converter with integrated FETs. It employs the proprietary D-CAP3™ control mode that is optimized for low-ESR output capacitors and features fast transient response without external compensation. The operating input voltage range is 4.5 V to 18 V, the output voltage can be programmed between 0.6 V and 7 V, and the output current is up to 6 A. The operating frequency is internally set to nominal 600 kHz in CCM, and there are 3 different operation modes can be configured by MODE pin at light load: Eco-Mode, Out-of-Audio, and FCCM. TPS566235 provides rich functions as well as excellent power supply performance, internal fixed 1mSec soft start, power good indicator, and full protections including UVLO, OCP, OVP, UVP, OTP. The devices are available in 3.0-mm × 2.0-mm HotRod™ package and the die operating temperature is specified from -40°C to 125°C.

TPS566235EVM-036 evaluation module (EVM) is designed for accessing to the features of TPS566235.

2 Specification Summary

A summary of TPS566235EVM-036 specification is provided in [Table 1](#). TPS566235EVM-036 is designed for $V_{IN} = 4.5\text{ V} - 18\text{ V}$, $V_{OUT} = 1.05\text{ V}$, the junction temperature T_J is 25°C for all measurement, unless otherwise noted.

Table 1. TPS566235EVM-036 Specifications Summary

SPECIFICATIONS	TEST CONDITIONS	MIN	TYP	MAX	Unit
Input voltage		4.5	12	18	V
Output voltage set point			1.05		V
Output current range		0		6	A
FB voltage	$T_J = 25^\circ\text{C}$	594	600	606	mV
Operating frequency	$V_{IN} = 12\text{ V}$, $I_{OUT} = 6\text{ A}$		600		kHz
Soft start time	Internal fixed soft start time		1		mS
Over current limit	Valley current set point		7.6		A

3 Modifications

Some modifications can be made to this module for different output voltages and different operation modes.

3.1 Output Voltage Setpoint

V_{OUT} is set by the resistor divider network of R3 (R_{TOP}) and R8 (R_{BOT}). Set R8 value firstly, then changing R3 value can change V_{OUT} above the reference voltage $V_{REF} = 0.6\text{ V}$. The R3 value for a specific output voltage can be calculated using [Equation 1](#).

$$R_{(TOP)} = \frac{R_{(BOT)} \cdot (V_{OUT} - V_{REF})}{V_{REF}} \quad (1)$$

3.2 Mode Selection

TPS566235 has a MODE pin to select 3 different operation mode at light load. The device reads the voltage on MODE pin during start-up and latches onto one of the MODE options listed below in [Table 2](#).

Table 2. MODE Pin Resistor Setting

V_{MODE}	RECOMMENDED MODE RESISTOR R_M	OPERATION MODE
0 - 0.3 V	0 Ω	Eco-Mode
0.3 V - 1.2 V	100 k Ω - 150 k Ω	Out-of-Audio (OOA)
> 1.2 V	Connected to VCC pin (recommnd) or > 400 k Ω	Forced CCM (FCCM)

Changing the position of jumper on J3 can modify MODE pin configuration before power on.

4 Schematic and Board layout

4.1 Schematic

Figure 1 illustrates TPS566235EVM-036 Evaluation Module schematic.

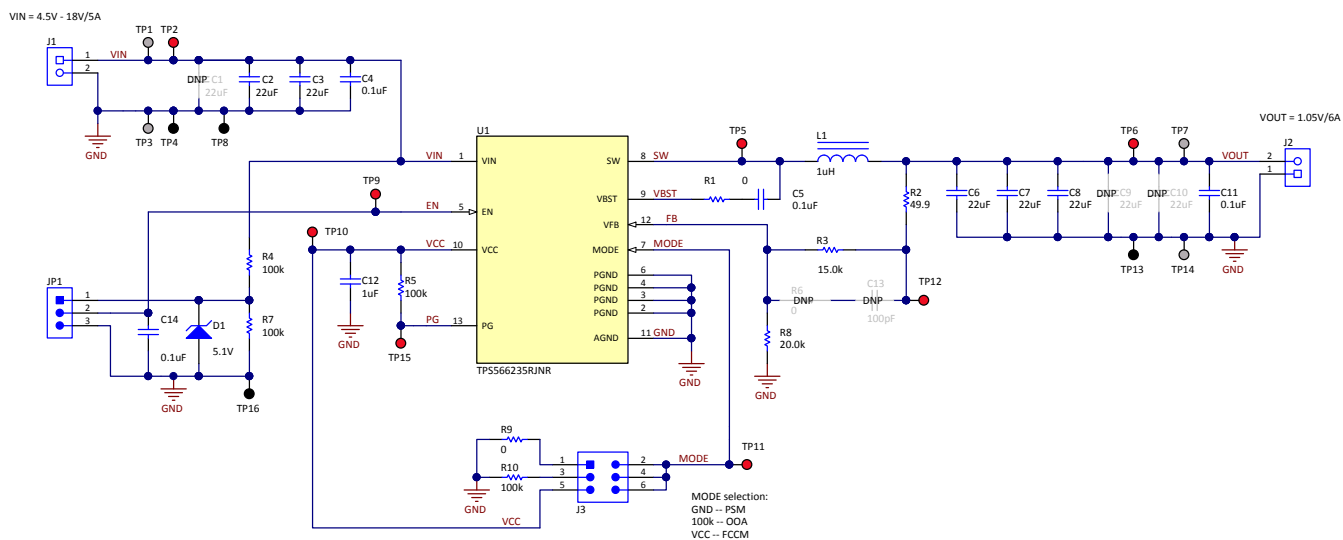


Figure 1. TPS566235EVM-036 Evaluation Module Schematic

4.2 Board Layout

Figure 2 through Figure 6 illustrates the TPS566235EVM-036 board layout. The top layer contains the main power traces for V_{IN} , V_{OUT} , and SW, there is a large area filled with ground. The internal layer-1 and layer-2 are ground plane. The bottom layer is another ground plane. The ground traces of each layer are connected together with multiple VIAs. The top and bottom layers are 2-oz copper and internal layers are 1-oz copper.

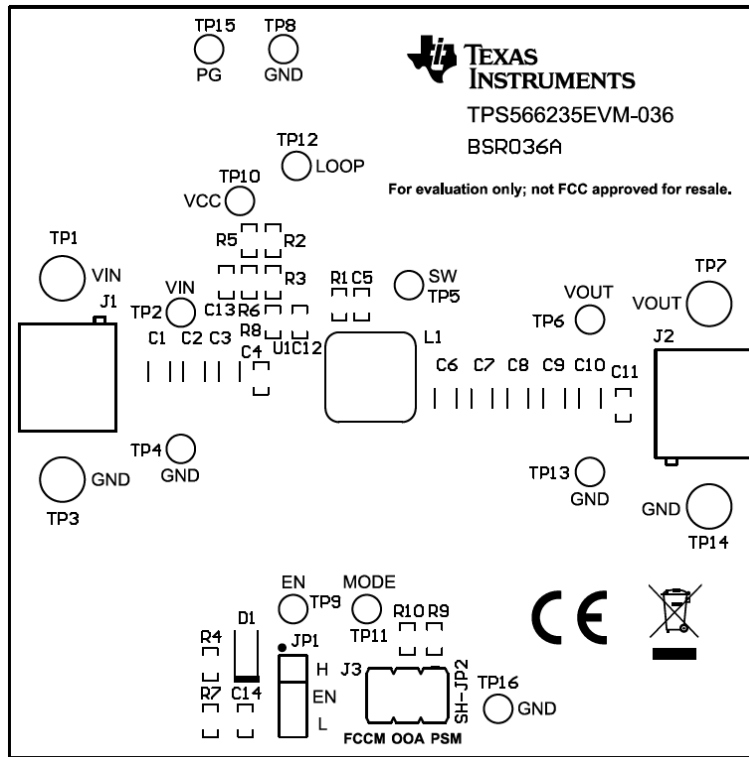


Figure 2. Component Placement (Top Layer)

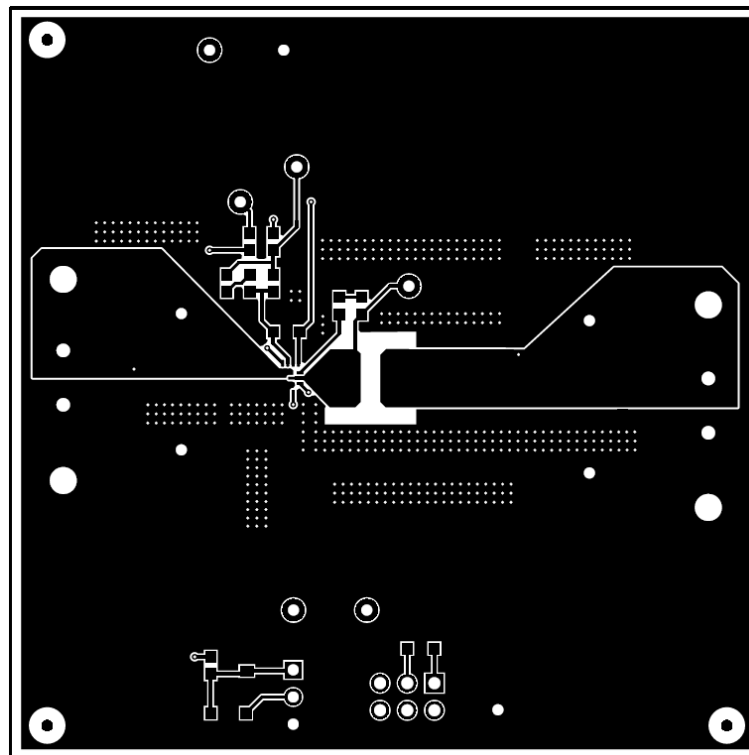


Figure 3. Board Layout (Top Layer)

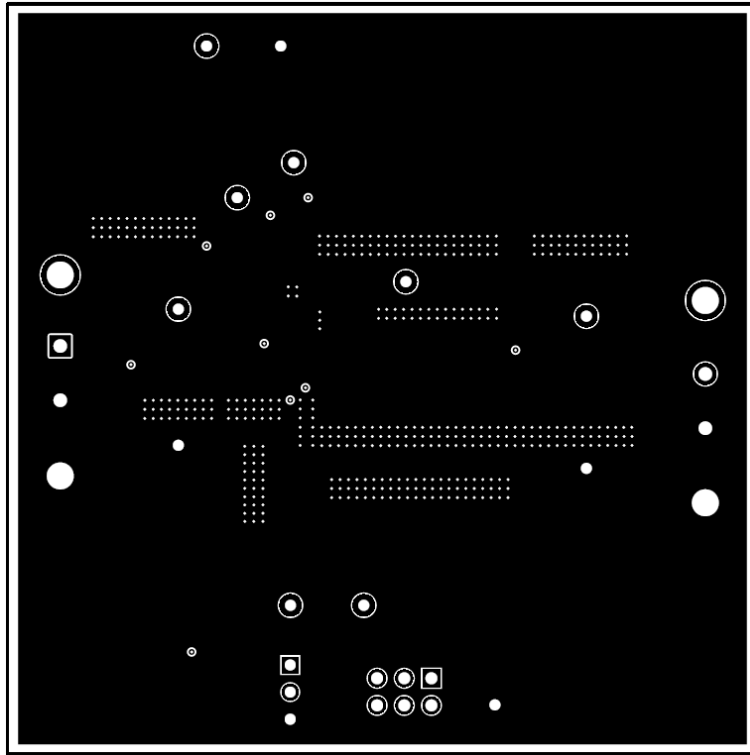


Figure 4. Board Layout (Second Layer)

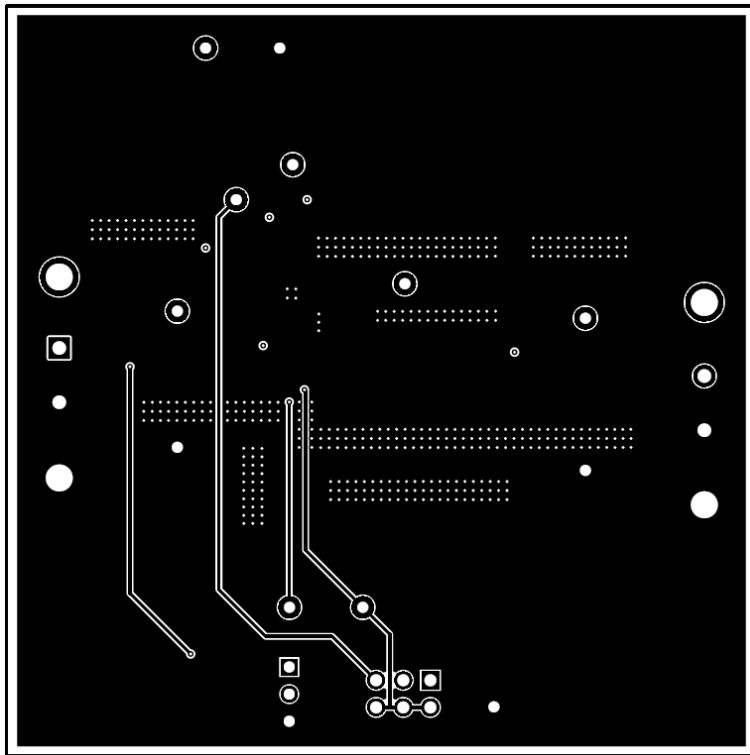


Figure 5. Board Layout (Third Layer)

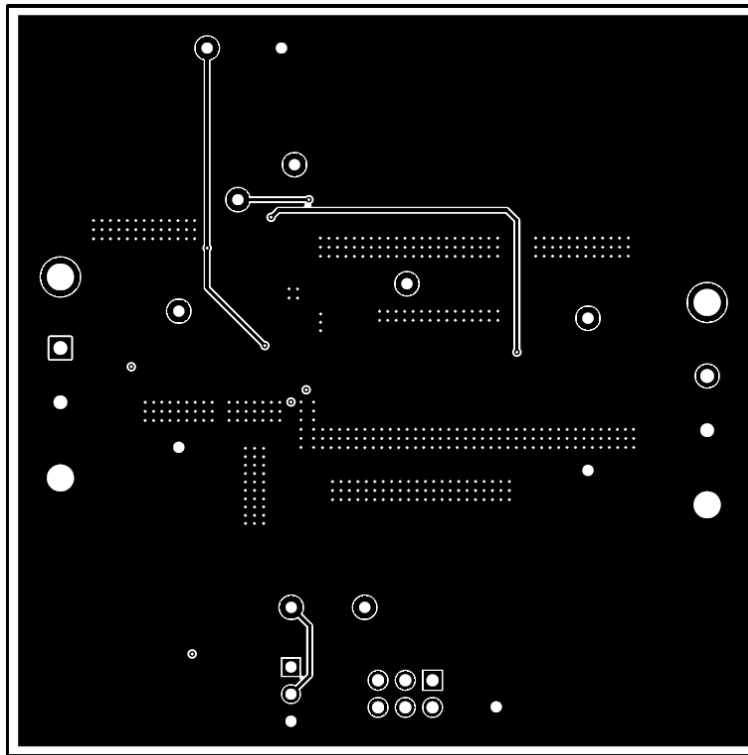


Figure 6. Board Layout (Bottom Layer)

5 EVM Test Setup

This section describes how to properly connect, set up, and use TPS566235EVM-036 evaluation module.

5.1 Connectors and Jumpers Description and Placement

TPS566235EVM-036 is provided with input/output connectors and test points as listed in [Table 3](#). And [Figure 7](#) and [Figure 8](#) shows connectors and jumpers placement on TPS566235EVM-036 board.

A power supply capable of supplying greater than 5 A must be connected to J1 through a pair of 20-AWG wires. The load must be connected to J2 through a pair of 20-AWG wires. The maximum load current capability is 6 A. Wire lengths must be minimized to reduce losses in the wires. Test point TP2 provides a place to monitor the V_{IN} input voltages with TP4 providing a convenient ground reference. TP6 is used to monitor the output voltage with TP13 as the ground reference.

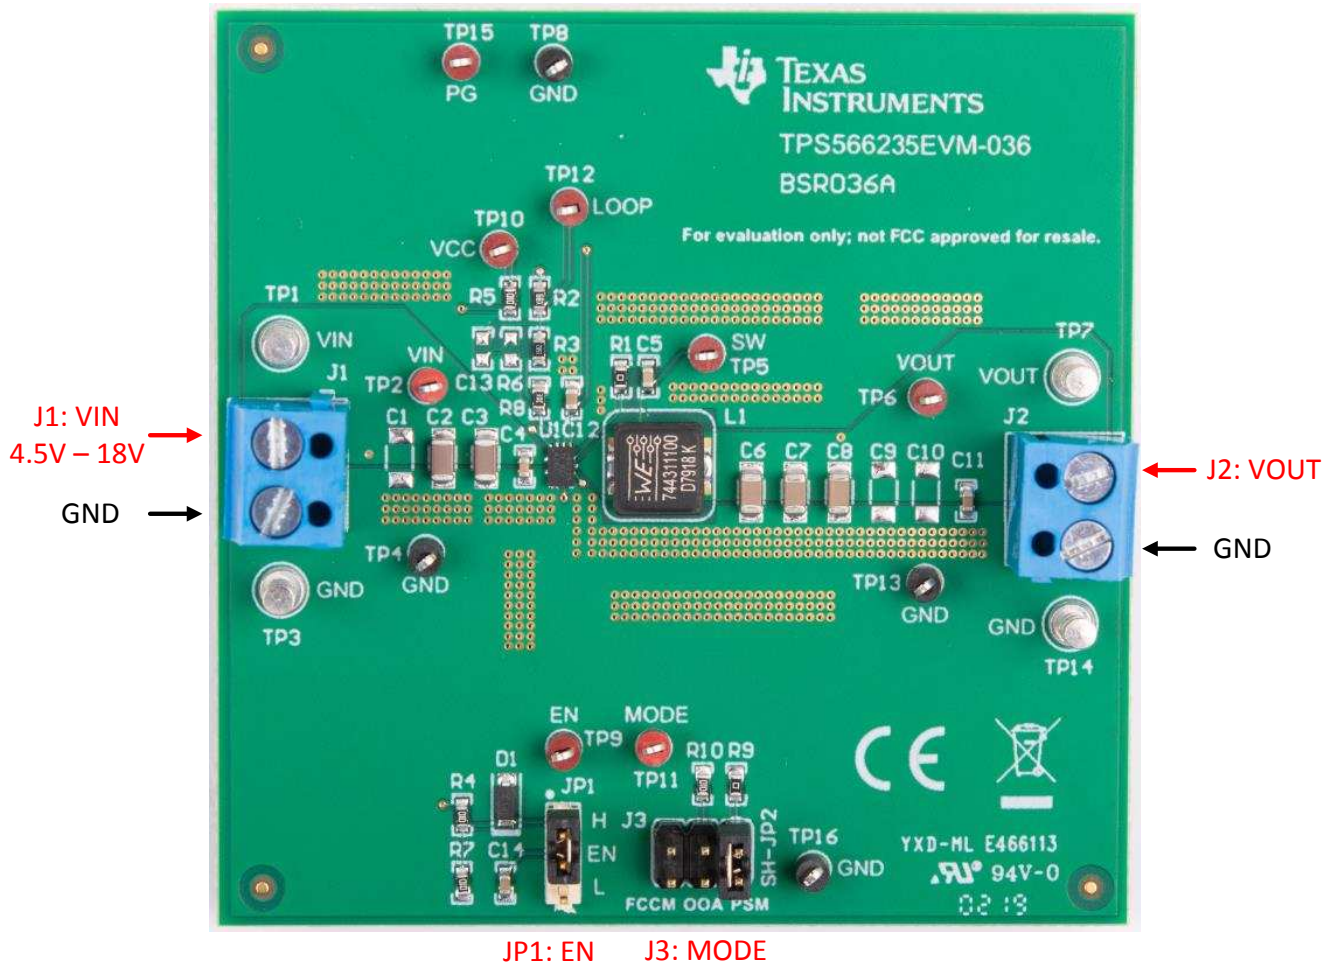
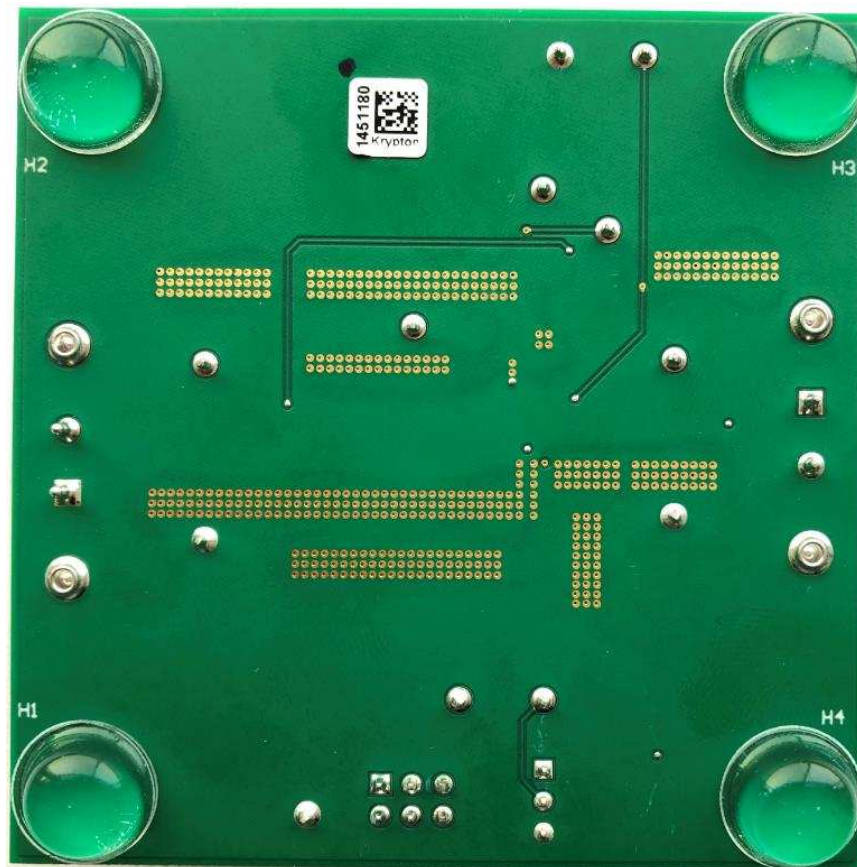


Figure 7. Connectors and Jumpers Placement (Top View)


Figure 8. Connectors and Jumpers Placement (Bottom View)
Table 3. Connectors and Test Points Description

DESIGNATOR	FUNCTION	DESCRIPTION
J1	V_{IN} connector	Connect input power supply
J2	V_{OUT} connector	Connect output load
J3	MODE selection	Refer to Table 2 for operation mode selection
JP1	Enable/disable control	Middle pin is IC's EN pin. Floating EN or shunting to GND will disable IC; Shunting EN to the other side will enable IC
TP1, TP2	V_{IN} test point	Test input voltage
TP3, TP4, TP8, TP13, TP14, TP16	GND test point	Ground reference
TP5	SW test point	Test switching node
TP6, TP7	V_{OUT} test point	Test output voltage
TP9	EN test point	Test enable signal
TP10	VCC test point	Test VCC
TP11	MODE test point	Test MODE
TP12	Loop test point	Test point between voltage divider network and output, used for loop response measurement
TP15	PG test point	Test power good signal

5.2 Start-up Procedure

Start-up with dedicated enable signal:

1. Select operation mode at J3.
2. Apply 4.5-V~18-V power supply to J1.
3. Apply 1.6-V~5.5-V enable signal to JP1 middle pin (EN pin).
4. Apply load to J2 output connector.
5. Check the V_{OUT} .

Start-up with VIN control enable signal:

1. Select operation mode at J3.
2. Connect JP1-1 pin to JP1-2 pin with jumper cap.
3. Apply 4.5-V - 18-V power supply to J1.
4. Apply load to J2 output connector.
5. Check the V_{OUT} .

6 Test Waveforms

6.1 Power up

Figure 9 shows the power up waveform at 12-V input and 1.05-V output. Once the EN signal is high, V_{OUT} starts to ramp up.

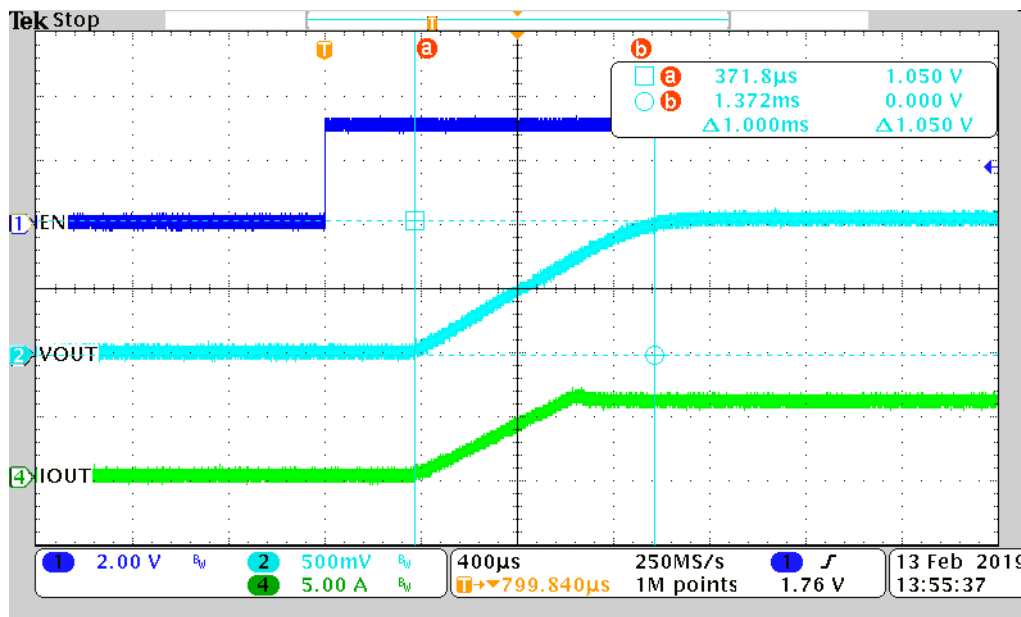


Figure 9. Power up with 6 A loading controlled by EN pin

6.2 Power down

Figure 10 shows the power down waveform at 12-V input and 1.05-V output. Once the EN signal is low, V_{OUT} starts to ramp down.

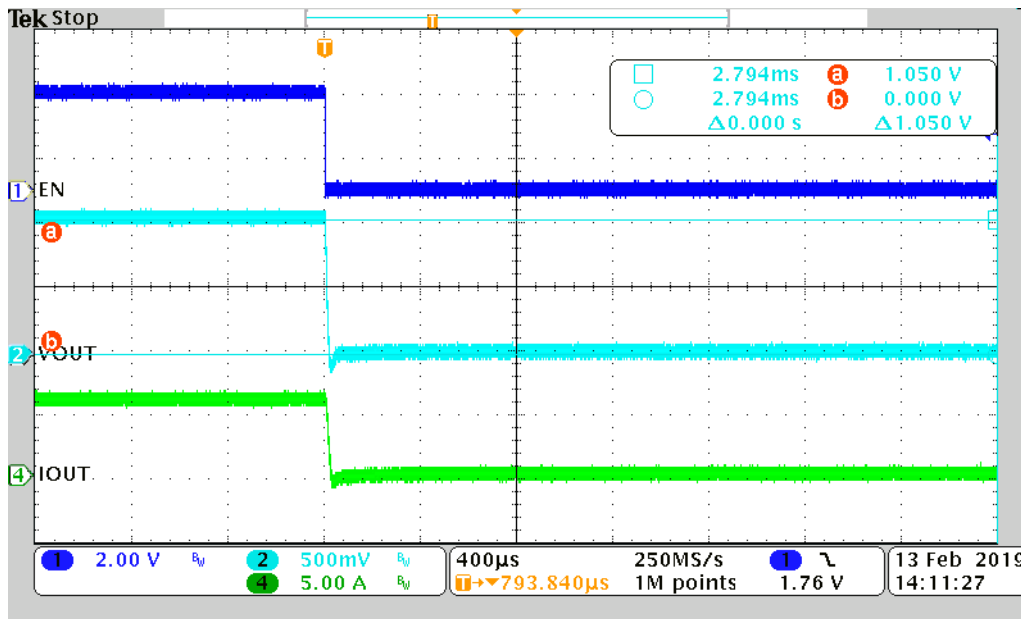


Figure 10. Power Down with 6-A Loading Controlled by EN Pin

6.3 Output Voltage Ripple

Figure 11 and Figure 12 show the V_{OUT} ripple at 12-V input and 1.05-V output.

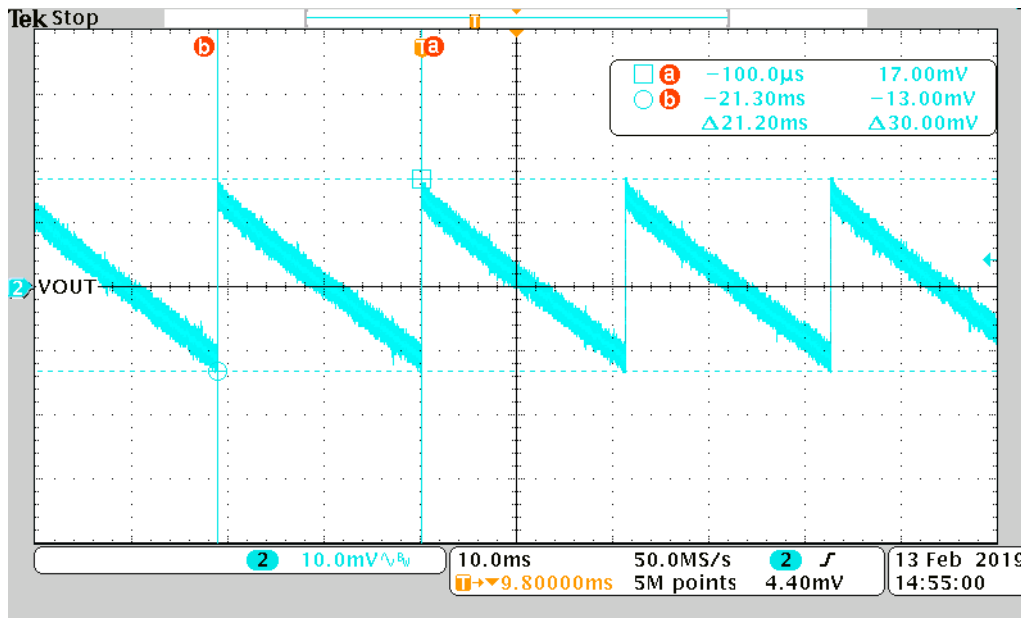


Figure 11. V_{OUT} Ripple with 0-A Loading

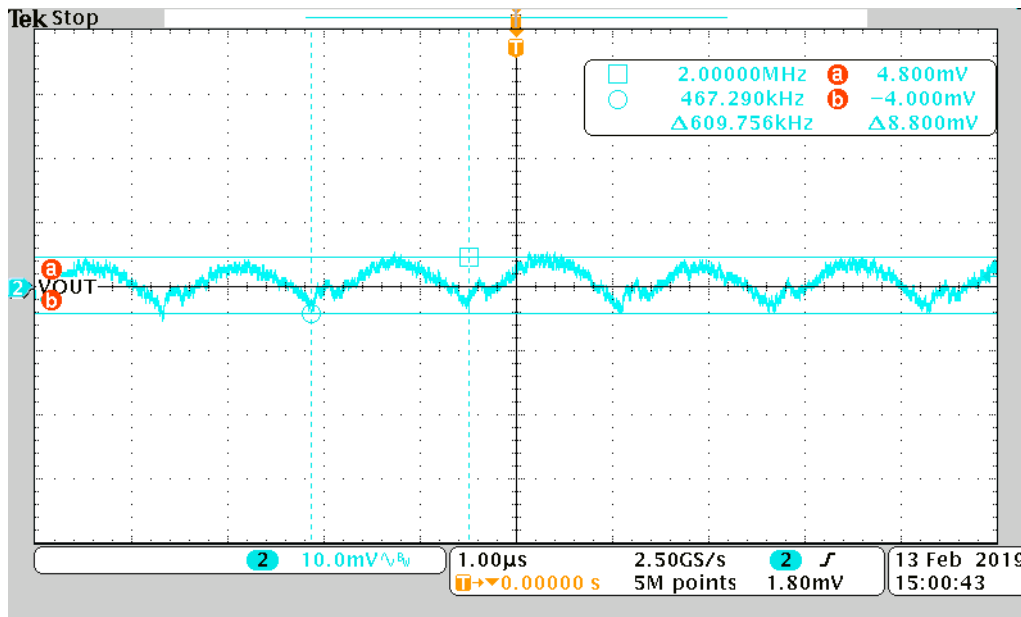


Figure 12. V_{OUT} Ripple with 6-A Loading

6.4 Load Transient Response

Figure 13 and Figure 14 show load transient response at 12-V input and 1.05-V output. The loading step slew rate is 2.5 A/uS.

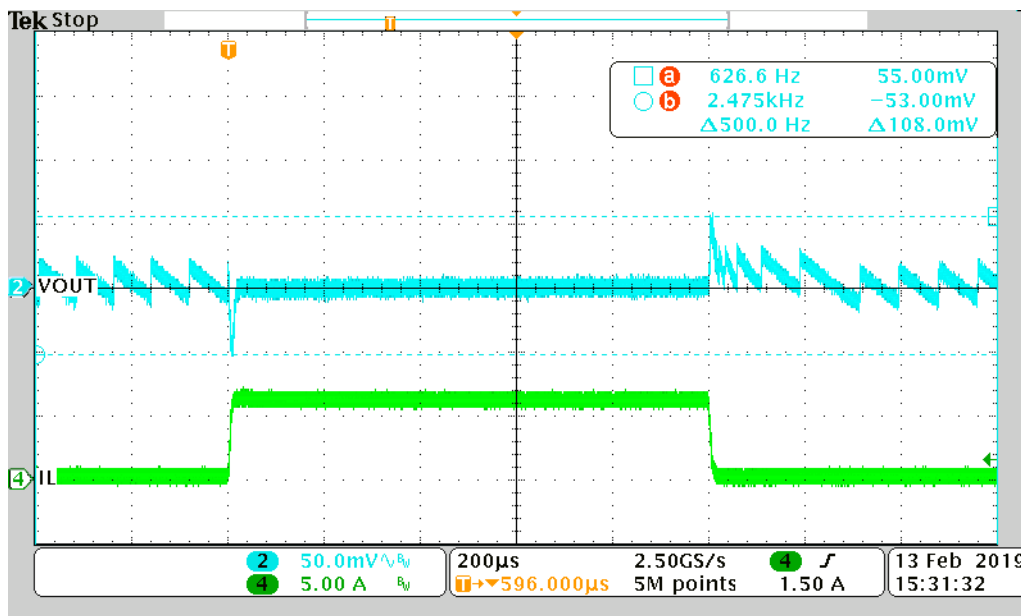


Figure 13. Load Transient Response from 0 A to 6 A with $R_6 = 0 \Omega$ and $C_{13} = 100 \text{ pF}$

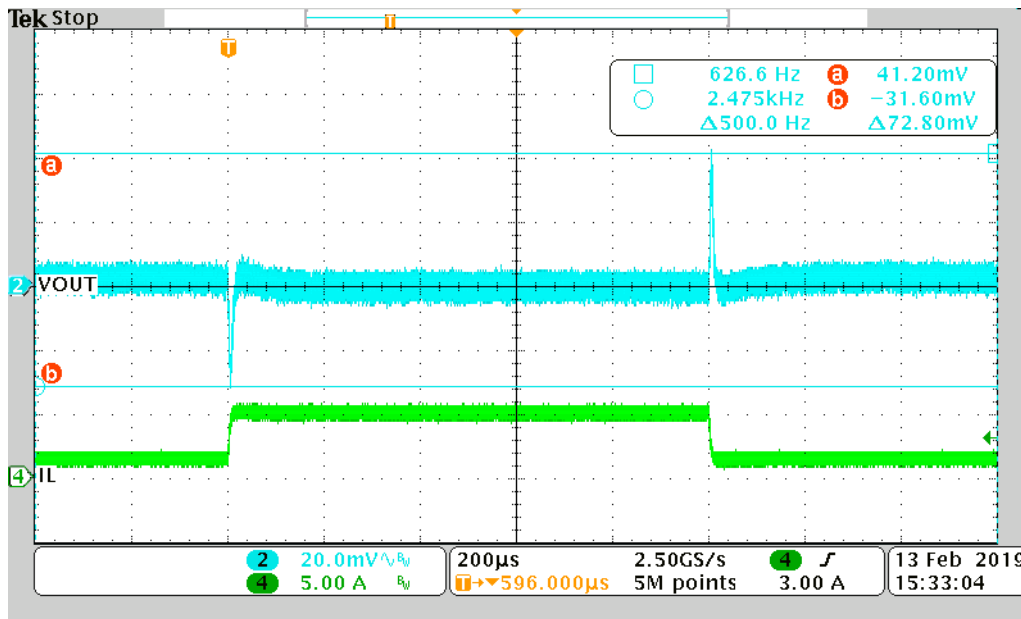


Figure 14. Load Transient Response from 1.2 A to 4.8 A with R6 = 0 Ω and C13 = 100 pF

6.5 Thermal

Figure 15 shows the thermal information at 12-V input, 1.05-V output, 6-A full loading under room temperature.

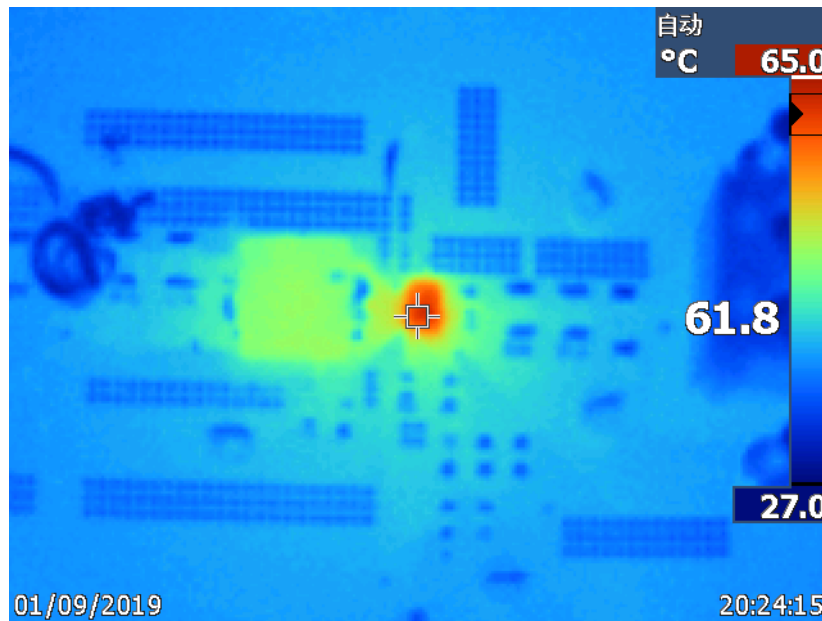


Figure 15. Thermal Information at 6-A Full Loading

7 List of Materials and Reference

7.1 List of Materials

Table 4 presents the List of materials for TPS566235EVM-036.

Table 4. List of Materials

Designator	Quantity	Description	Part Number	Manufacturer
PCB	1	Printed Circuit Board	BSR036	
C2, C3	2	Capacitor, ceramic, 22 μ F, 35 V, \pm 20%, X5R, 1206	C3216X5R1V226M160AC	TDK
C4, C5, C11, C14	4	Capacitor, ceramic, 0.1 μ F, 50 V, \pm 10%, X7R, 0603	C1608X7R1H104K080AA	TDK
C6, C7, C8	3	Capacitor, ceramic, 22 μ F, 10 V, \pm 10%, X7R, 1206	GRM31CR71A226KE15L	MuRata
C12	1	Capacitor, ceramic, 1 μ F, 25 V, \pm 10%, X7R, 0603	06033C105KAT2A	AVX
D1	1	Diode, Zener, 5.1 V, 500 mW, SOD-123	MMSZ5231B-7-F	Diodes Inc.
H1, H2, H3, H4	4	Bumpon, hemisphere, 0.44 X 0.20, clear	SJ-5303 (CLEAR)	3M
J1, J2	2	Terminal block, 5.08 mm, 2x1, brass, TH	ED120/2DS	On-Shore Technology
J3	1	Header, 2.54mm, 3x2, gold, TH	61300621121	Würth Elektronik
JP1	1	Header, 100mil, 3x1, tin, TH	PEC03SAAN	Sullins Connector Solutions
L1	1	Inductor, shielded drum core, WE-superflux200, 1 μ H, 15 A, 0.0046 Ω , SMD	744311100	Würth Elektronik
R1, R9	2	Resistor, 0, 5%, 0.1 W, 0603	RC0603JR-070RL	Yageo
R2	1	Resistor, 49.9, 1%, 0.1 W, 0603	CRCW060349R9FKEA	Vishay-Dale
R3	1	Resistor, 15.0 k, 1%, 0.1 W, 0603	CRCW060315K0FKEA	Vishay-Dale
R4, R5, R7, R10	4	Resistor, 100 k, 1%, 0.1 W, 0603	RC0603FR-07100KL	Yageo
R8	1	Resistor, 20.0 k, 1%, 0.1 W, 0603	CRCW060320K0FKEA	Vishay-Dale
SH-JP1, SH-JP2	2	Shunt, 100mil, gold plated, black	SNT-100-BK-G	Samtec
TP1, TP3, TP7, TP14	4	Terminal, turret, TH, triple	1598-2	Keystone
TP2, TP5, TP6, TP9, TP10, TP11, TP12, TP15	8	Test point, miniature, red, TH	5000	Keystone
TP4, TP8, TP13, TP16	4	Test point, miniature, black, TH	5001	Keystone
U1	1	4.5-V to 18-V, 6-A synchronous buck converter	TPS566235RJNR	Texas Instruments
C1	0	Capacitor, ceramic, 22 μ F, 35 V, \pm 20%, X5R, 1206	C3216X5R1V226M160AC	TDK
C9, C10	0	Capacitor, ceramic, 22 μ F, 10 V, \pm 10%, X7R, 1206	GRM31CR71A226KE15L	MuRata
C13	0	Capacitor, ceramic, 100 pF, 100 V, \pm 5%, C0G/NP0, 0603	GRM1885C2A101JA01D	MuRata
R6	0	Resistor, 0, 5%, 0.1 W, 0603	RC0603JR-070RL	Yageo
FID1, FID2, FID3	0	Fiducial mark. There is nothing to buy or mount		

7.2 Reference

1. *TPS566235 4.5-V to 18-V, 6-A synchronous step-down converter* data sheet. ([SLVSEW1](#))

STANDARD TERMS FOR EVALUATION MODULES

1. *Delivery:* TI delivers TI evaluation boards, kits, or modules, including any accompanying demonstration software, components, and/or documentation which may be provided together or separately (collectively, an "EVM" or "EVMs") to the User ("User") in accordance with the terms set forth herein. User's acceptance of the EVM is expressly subject to the following terms.
 - 1.1 EVMs are intended solely for product or software developers for use in a research and development setting to facilitate feasibility evaluation, experimentation, or scientific analysis of TI semiconductors products. EVMs have no direct function and are not finished products. EVMs shall not be directly or indirectly assembled as a part or subassembly in any finished product. For clarification, any software or software tools provided with the EVM ("Software") shall not be subject to the terms and conditions set forth herein but rather shall be subject to the applicable terms that accompany such Software
 - 1.2 EVMs are not intended for consumer or household use. EVMs may not be sold, sublicensed, leased, rented, loaned, assigned, or otherwise distributed for commercial purposes by Users, in whole or in part, or used in any finished product or production system.
2. *Limited Warranty and Related Remedies/Disclaimers:*
 - 2.1 These terms do not apply to Software. The warranty, if any, for Software is covered in the applicable Software License Agreement.
 - 2.2 TI warrants that the TI EVM will conform to TI's published specifications for ninety (90) days after the date TI delivers such EVM to User. Notwithstanding the foregoing, TI shall not be liable for a nonconforming EVM if (a) the nonconformity was caused by neglect, misuse or mistreatment by an entity other than TI, including improper installation or testing, or for any EVMs that have been altered or modified in any way by an entity other than TI, (b) the nonconformity resulted from User's design, specifications or instructions for such EVMs or improper system design, or (c) User has not paid on time. Testing and other quality control techniques are used to the extent TI deems necessary. TI does not test all parameters of each EVM. User's claims against TI under this Section 2 are void if User fails to notify TI of any apparent defects in the EVMs within ten (10) business days after delivery, or of any hidden defects with ten (10) business days after the defect has been detected.
 - 2.3 TI's sole liability shall be at its option to repair or replace EVMs that fail to conform to the warranty set forth above, or credit User's account for such EVM. TI's liability under this warranty shall be limited to EVMs that are returned during the warranty period to the address designated by TI and that are determined by TI not to conform to such warranty. If TI elects to repair or replace such EVM, TI shall have a reasonable time to repair such EVM or provide replacements. Repaired EVMs shall be warranted for the remainder of the original warranty period. Replaced EVMs shall be warranted for a new full ninety (90) day warranty period.

WARNING

Evaluation Kits are intended solely for use by technically qualified, professional electronics experts who are familiar with the dangers and application risks associated with handling electrical mechanical components, systems, and subsystems.

User shall operate the Evaluation Kit within TI's recommended guidelines and any applicable legal or environmental requirements as well as reasonable and customary safeguards. Failure to set up and/or operate the Evaluation Kit within TI's recommended guidelines may result in personal injury or death or property damage. Proper set up entails following TI's instructions for electrical ratings of interface circuits such as input, output and electrical loads.

NOTE:

EXPOSURE TO ELECTROSTATIC DISCHARGE (ESD) MAY CAUSE DEGRADATION OR FAILURE OF THE EVALUATION KIT; TI RECOMMENDS STORAGE OF THE EVALUATION KIT IN A PROTECTIVE ESD BAG.

3 Regulatory Notices:

3.1 United States

3.1.1 Notice applicable to EVMs not FCC-Approved:

FCC NOTICE: This kit is designed to allow product developers to evaluate electronic components, circuitry, or software associated with the kit to determine whether to incorporate such items in a finished product and software developers to write software applications for use with the end product. This kit is not a finished product and when assembled may not be resold or otherwise marketed unless all required FCC equipment authorizations are first obtained. Operation is subject to the condition that this product not cause harmful interference to licensed radio stations and that this product accept harmful interference. Unless the assembled kit is designed to operate under part 15, part 18 or part 95 of this chapter, the operator of the kit must operate under the authority of an FCC license holder or must secure an experimental authorization under part 5 of this chapter.

3.1.2 For EVMs annotated as FCC – FEDERAL COMMUNICATIONS COMMISSION Part 15 Compliant:

CAUTION

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

FCC Interference Statement for Class A EVM devices

NOTE: This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at his own expense.

FCC Interference Statement for Class B EVM devices

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

3.2 Canada

3.2.1 For EVMs issued with an Industry Canada Certificate of Conformance to RSS-210 or RSS-247

Concerning EVMs Including Radio Transmitters:

This device complies with Industry Canada license-exempt RSSs. Operation is subject to the following two conditions:

(1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Concernant les EVMs avec appareils radio:

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes: (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Concerning EVMs Including Detachable Antennas:

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication. This radio transmitter has been approved by Industry Canada to operate with the antenna types listed in the user guide with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Concernant les EVMs avec antennes détachables

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante. Le présent émetteur radio a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés dans le manuel d'usage et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

3.3 Japan

3.3.1 *Notice for EVMs delivered in Japan:* Please see http://www.tij.co.jp/lstds/ti_ja/general/eStore/notice_01.page 日本国内に輸入される評価用キット、ボードについては、次のところをご覧ください。
http://www.tij.co.jp/lstds/ti_ja/general/eStore/notice_01.page

3.3.2 *Notice for Users of EVMs Considered "Radio Frequency Products" in Japan:* EVMs entering Japan may not be certified by TI as conforming to Technical Regulations of Radio Law of Japan.

If User uses EVMs in Japan, not certified to Technical Regulations of Radio Law of Japan, User is required to follow the instructions set forth by Radio Law of Japan, which includes, but is not limited to, the instructions below with respect to EVMs (which for the avoidance of doubt are stated strictly for convenience and should be verified by User):

1. Use EVMs in a shielded room or any other test facility as defined in the notification #173 issued by Ministry of Internal Affairs and Communications on March 28, 2006, based on Sub-section 1.1 of Article 6 of the Ministry's Rule for Enforcement of Radio Law of Japan,
2. Use EVMs only after User obtains the license of Test Radio Station as provided in Radio Law of Japan with respect to EVMs, or
3. Use of EVMs only after User obtains the Technical Regulations Conformity Certification as provided in Radio Law of Japan with respect to EVMs. Also, do not transfer EVMs, unless User gives the same notice above to the transferee. Please note that if User does not follow the instructions above, User will be subject to penalties of Radio Law of Japan.

【無線電波を送信する製品の開発キットをお使いになる際の注意事項】 開発キットの中には技術基準適合証明を受けていないものがあります。技術適合証明を受けていないものご使用に際しては、電波法遵守のため、以下のいずれかの措置を取っていただく必要がありますのでご注意ください。

1. 電波法施行規則第6条第1項第1号に基づく平成18年3月28日総務省告示第173号で定められた電波暗室等の試験設備でご使用いただく。
2. 実験局の免許を取得後ご使用いただく。
3. 技術基準適合証明を取得後ご使用いただく。

なお、本製品は、上記の「ご使用にあたっての注意」を譲渡先、移転先に通知しない限り、譲渡、移転できないものとします。

上記を遵守頂けない場合は、電波法の罰則が適用される可能性があることをご留意ください。日本テキサス・インスツルメンツ株式会社
東京都新宿区西新宿 6 丁目 2 4 番 1 号
西新宿三井ビル

3.3.3 *Notice for EVMs for Power Line Communication:* Please see http://www.tij.co.jp/lstds/ti_ja/general/eStore/notice_02.page 電力線搬送波通信についての開発キットをお使いになる際の注意事項については、次のところをご覧ください。
http://www.tij.co.jp/lstds/ti_ja/general/eStore/notice_02.page

3.4 European Union

3.4.1 *For EVMs subject to EU Directive 2014/30/EU (Electromagnetic Compatibility Directive):*

This is a class A product intended for use in environments other than domestic environments that are connected to a low-voltage power-supply network that supplies buildings used for domestic purposes. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.

-
- 4 *EVM Use Restrictions and Warnings:*
 - 4.1 EVMS ARE NOT FOR USE IN FUNCTIONAL SAFETY AND/OR SAFETY CRITICAL EVALUATIONS, INCLUDING BUT NOT LIMITED TO EVALUATIONS OF LIFE SUPPORT APPLICATIONS.
 - 4.2 User must read and apply the user guide and other available documentation provided by TI regarding the EVM prior to handling or using the EVM, including without limitation any warning or restriction notices. The notices contain important safety information related to, for example, temperatures and voltages.
 - 4.3 *Safety-Related Warnings and Restrictions:*
 - 4.3.1 User shall operate the EVM within TI's recommended specifications and environmental considerations stated in the user guide, other available documentation provided by TI, and any other applicable requirements and employ reasonable and customary safeguards. Exceeding the specified performance ratings and specifications (including but not limited to input and output voltage, current, power, and environmental ranges) for the EVM may cause personal injury or death, or property damage. If there are questions concerning performance ratings and specifications, User should contact a TI field representative prior to connecting interface electronics including input power and intended loads. Any loads applied outside of the specified output range may also result in unintended and/or inaccurate operation and/or possible permanent damage to the EVM and/or interface electronics. Please consult the EVM user guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative. During normal operation, even with the inputs and outputs kept within the specified allowable ranges, some circuit components may have elevated case temperatures. These components include but are not limited to linear regulators, switching transistors, pass transistors, current sense resistors, and heat sinks, which can be identified using the information in the associated documentation. When working with the EVM, please be aware that the EVM may become very warm.
 - 4.3.2 EVMs are intended solely for use by technically qualified, professional electronics experts who are familiar with the dangers and application risks associated with handling electrical mechanical components, systems, and subsystems. User assumes all responsibility and liability for proper and safe handling and use of the EVM by User or its employees, affiliates, contractors or designees. User assumes all responsibility and liability to ensure that any interfaces (electronic and/or mechanical) between the EVM and any human body are designed with suitable isolation and means to safely limit accessible leakage currents to minimize the risk of electrical shock hazard. User assumes all responsibility and liability for any improper or unsafe handling or use of the EVM by User or its employees, affiliates, contractors or designees.
 - 4.4 User assumes all responsibility and liability to determine whether the EVM is subject to any applicable international, federal, state, or local laws and regulations related to User's handling and use of the EVM and, if applicable, User assumes all responsibility and liability for compliance in all respects with such laws and regulations. User assumes all responsibility and liability for proper disposal and recycling of the EVM consistent with all applicable international, federal, state, and local requirements.
 5. *Accuracy of Information:* To the extent TI provides information on the availability and function of EVMs, TI attempts to be as accurate as possible. However, TI does not warrant the accuracy of EVM descriptions, EVM availability or other information on its websites as accurate, complete, reliable, current, or error-free.
 6. *Disclaimers:*
 - 6.1 EXCEPT AS SET FORTH ABOVE, EVMS AND ANY MATERIALS PROVIDED WITH THE EVM (INCLUDING, BUT NOT LIMITED TO, REFERENCE DESIGNS AND THE DESIGN OF THE EVM ITSELF) ARE PROVIDED "AS IS" AND "WITH ALL FAULTS." TI DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, REGARDING SUCH ITEMS, INCLUDING BUT NOT LIMITED TO ANY EPIDEMIC FAILURE WARRANTY OR IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF ANY THIRD PARTY PATENTS, COPYRIGHTS, TRADE SECRETS OR OTHER INTELLECTUAL PROPERTY RIGHTS.
 - 6.2 EXCEPT FOR THE LIMITED RIGHT TO USE THE EVM SET FORTH HEREIN, NOTHING IN THESE TERMS SHALL BE CONSTRUED AS GRANTING OR CONFERRING ANY RIGHTS BY LICENSE, PATENT, OR ANY OTHER INDUSTRIAL OR INTELLECTUAL PROPERTY RIGHT OF TI, ITS SUPPLIERS/LICENSORS OR ANY OTHER THIRD PARTY, TO USE THE EVM IN ANY FINISHED END-USER OR READY-TO-USE FINAL PRODUCT, OR FOR ANY INVENTION, DISCOVERY OR IMPROVEMENT, REGARDLESS OF WHEN MADE, CONCEIVED OR ACQUIRED.
 7. *USER'S INDEMNITY OBLIGATIONS AND REPRESENTATIONS.* USER WILL DEFEND, INDEMNIFY AND HOLD TI, ITS LICENSORS AND THEIR REPRESENTATIVES HARMLESS FROM AND AGAINST ANY AND ALL CLAIMS, DAMAGES, LOSSES, EXPENSES, COSTS AND LIABILITIES (COLLECTIVELY, "CLAIMS") ARISING OUT OF OR IN CONNECTION WITH ANY HANDLING OR USE OF THE EVM THAT IS NOT IN ACCORDANCE WITH THESE TERMS. THIS OBLIGATION SHALL APPLY WHETHER CLAIMS ARISE UNDER STATUTE, REGULATION, OR THE LAW OF TORT, CONTRACT OR ANY OTHER LEGAL THEORY, AND EVEN IF THE EVM FAILS TO PERFORM AS DESCRIBED OR EXPECTED.

8. *Limitations on Damages and Liability:*

8.1 *General Limitations.* IN NO EVENT SHALL TI BE LIABLE FOR ANY SPECIAL, COLLATERAL, INDIRECT, PUNITIVE, INCIDENTAL, CONSEQUENTIAL, OR EXEMPLARY DAMAGES IN CONNECTION WITH OR ARISING OUT OF THESE TERMS OR THE USE OF THE EVMS , REGARDLESS OF WHETHER TI HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES. EXCLUDED DAMAGES INCLUDE, BUT ARE NOT LIMITED TO, COST OF REMOVAL OR REINSTALLATION, ANCILLARY COSTS TO THE PROCUREMENT OF SUBSTITUTE GOODS OR SERVICES, RETESTING, OUTSIDE COMPUTER TIME, LABOR COSTS, LOSS OF GOODWILL, LOSS OF PROFITS, LOSS OF SAVINGS, LOSS OF USE, LOSS OF DATA, OR BUSINESS INTERRUPTION. NO CLAIM, SUIT OR ACTION SHALL BE BROUGHT AGAINST TI MORE THAN TWELVE (12) MONTHS AFTER THE EVENT THAT GAVE RISE TO THE CAUSE OF ACTION HAS OCCURRED.

8.2 *Specific Limitations.* IN NO EVENT SHALL TI'S AGGREGATE LIABILITY FROM ANY USE OF AN EVM PROVIDED HEREUNDER, INCLUDING FROM ANY WARRANTY, INDEMNITY OR OTHER OBLIGATION ARISING OUT OF OR IN CONNECTION WITH THESE TERMS, , EXCEED THE TOTAL AMOUNT PAID TO TI BY USER FOR THE PARTICULAR EVM(S) AT ISSUE DURING THE PRIOR TWELVE (12) MONTHS WITH RESPECT TO WHICH LOSSES OR DAMAGES ARE CLAIMED. THE EXISTENCE OF MORE THAN ONE CLAIM SHALL NOT ENLARGE OR EXTEND THIS LIMIT.

9. *Return Policy.* Except as otherwise provided, TI does not offer any refunds, returns, or exchanges. Furthermore, no return of EVM(s) will be accepted if the package has been opened and no return of the EVM(s) will be accepted if they are damaged or otherwise not in a resalable condition. If User feels it has been incorrectly charged for the EVM(s) it ordered or that delivery violates the applicable order, User should contact TI. All refunds will be made in full within thirty (30) working days from the return of the components(s), excluding any postage or packaging costs.

10. *Governing Law:* These terms and conditions shall be governed by and interpreted in accordance with the laws of the State of Texas, without reference to conflict-of-laws principles. User agrees that non-exclusive jurisdiction for any dispute arising out of or relating to these terms and conditions lies within courts located in the State of Texas and consents to venue in Dallas County, Texas. Notwithstanding the foregoing, any judgment may be enforced in any United States or foreign court, and TI may seek injunctive relief in any United States or foreign court.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2019, Texas Instruments Incorporated

IMPORTANT NOTICE AND DISCLAIMER

TI PROVIDES TECHNICAL AND RELIABILITY DATA (INCLUDING DATASHEETS), DESIGN RESOURCES (INCLUDING REFERENCE DESIGNS), APPLICATION OR OTHER DESIGN ADVICE, WEB TOOLS, SAFETY INFORMATION, AND OTHER RESOURCES "AS IS" AND WITH ALL FAULTS, AND DISCLAIMS ALL WARRANTIES, EXPRESS AND IMPLIED, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT OF THIRD PARTY INTELLECTUAL PROPERTY RIGHTS.

These resources are intended for skilled developers designing with TI products. You are solely responsible for (1) selecting the appropriate TI products for your application, (2) designing, validating and testing your application, and (3) ensuring your application meets applicable standards, and any other safety, security, or other requirements. These resources are subject to change without notice. TI grants you permission to use these resources only for development of an application that uses the TI products described in the resource. Other reproduction and display of these resources is prohibited. No license is granted to any other TI intellectual property right or to any third party intellectual property right. TI disclaims responsibility for, and you will fully indemnify TI and its representatives against, any claims, damages, costs, losses, and liabilities arising out of your use of these resources.

TI's products are provided subject to TI's Terms of Sale (www.ti.com/legal/termsofsale.html) or other applicable terms available either on ti.com or provided in conjunction with such TI products. TI's provision of these resources does not expand or otherwise alter TI's applicable warranties or warranty disclaimers for TI products.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2019, Texas Instruments Incorporated