


REVISION HISTORY

ECO	REV	DESCRIPTION	APPR	DATE
-	2	PRODUCTION FAB	VICTOR K.	04-11-11

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD. MAXIMUM SOLDER TEMPERATURE IS 240 DEGREES CELSIUS.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. INSTALL SHUNTS AS SHOWN ON ASSY DRAWING.
5. DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
6. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP TO ANY BOARD.
7. INSTALL TURRETS AND 4 STANDOFFS AT LOCATIONS SHOWN BELOW:

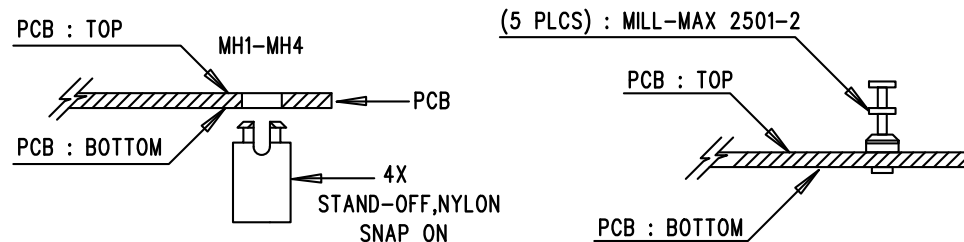

APPROVALS

PCB DES.	NC
APP ENG.	VICTOR K.



1630 MCCARTHY BLVD
 MILPITAS, CA 95035
 PH: (408)432-1900
 www.Linear.com
 LTC CONFIDENTIAL-
 FOR CUSTOMER USE ONLY

TITLE: TOP ASSEMBLY DRAWING:
 1A LOW NOISE, WIDE VIN BUCK-BOOST
 DC/DC CONVERTER

SIZE	IC NO.	LTC3536EDD	REV.
N/A		DEMO CIRCUIT 1797A	2

SCALE = NONE

FILENAME: DC1797A-2.PCB

SHT 1 of 2