

STK57FU394AGGEVB

STK57FU394AG-E Evaluation Board User's Manual



ON Semiconductor®


www.onsemi.com

Introduction


By using this board, STK57FU394AG-E (SIP2A / 2in1 / 3shunt) can be evaluated.

EVAL BOARD USER'S MANUAL

ONPN of EVAL Board	ONPN of IPM	Io
STK57FU394AGGEVB	STK57FU394AG-E	15 A

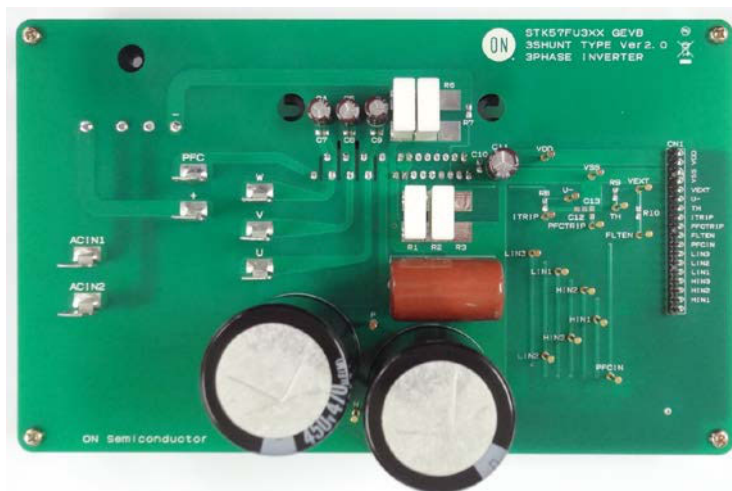

Top View

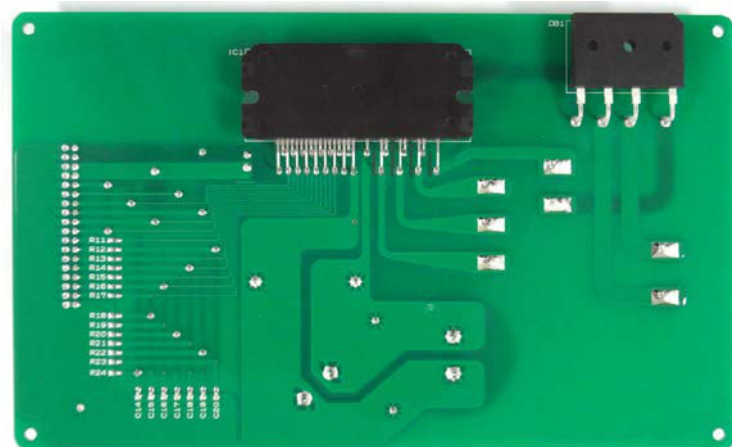

Bottom View

Figure 1. Evaluation Board Photos

STK57FU394AGGEVB

CIRCUIT DIAGRAM

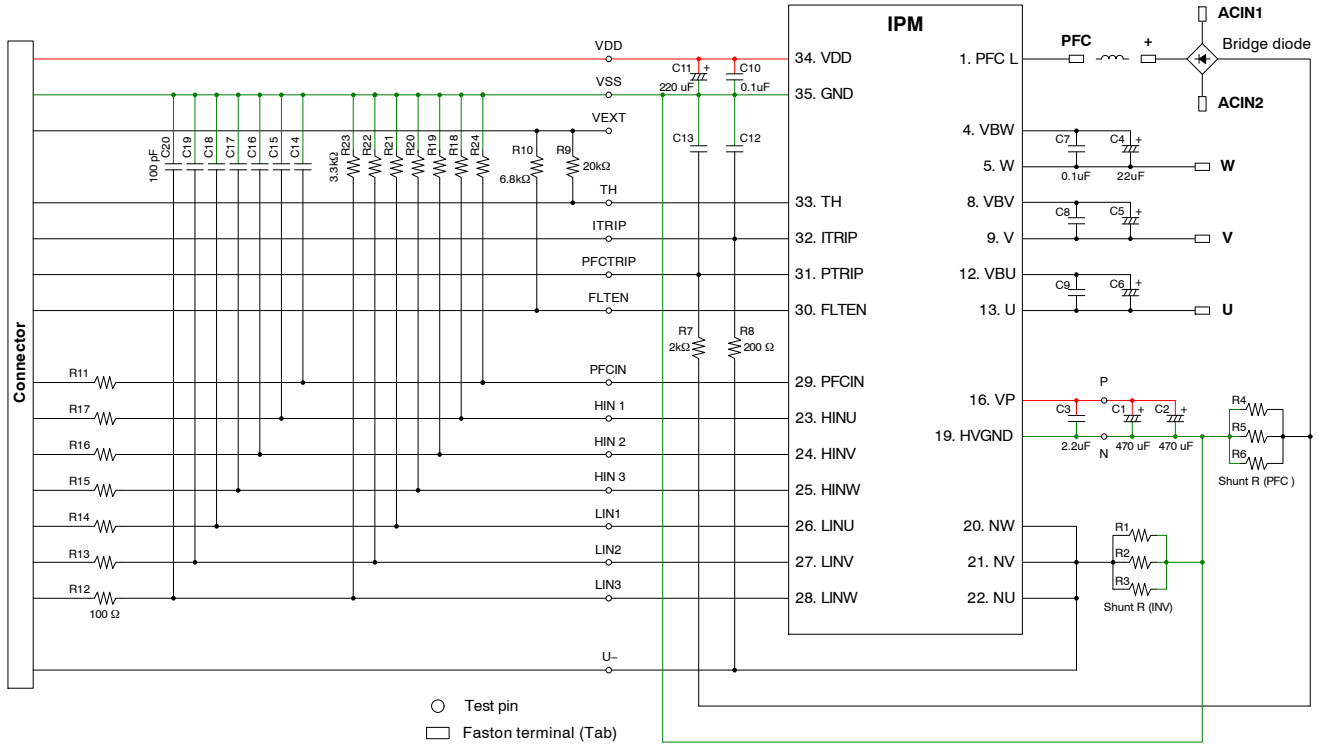


Figure 2. Evaluation Board Schematic

STK57FU394AGGEVB

PIN DESCRIPTION

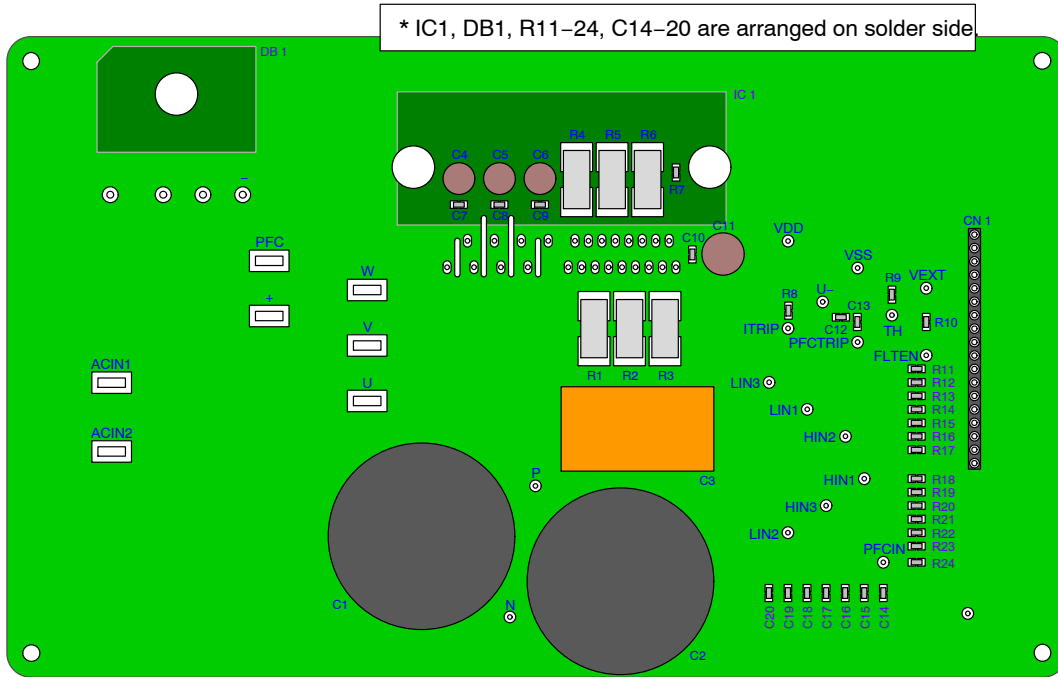


Figure 3. Transparent View from Top Side

U, V, W : 3 phase inverter output

VDD : Control power supply (DC 15 V)

VSS : Signal GND

PFC : Rectified AC Voltage input

HINx, LINx, PFCIN : Control signal input

ITRIP : Over-current protection for Inverter

PFCTRIP : Over-current protection for PFC

VEXT : FLTEN, TH pull-up

Apply the logic I/O voltage

FLTEN : Enable input and Fault output

TH : Internal thermistor

ACIN1, ACIN2 : Bridge diode AC voltage input

+, - : Bridge diode output

R1-6 : Shunt resistor, 3 parallel connection

R8 (, C12) : RC filter for ITRIP

R7 (, C13) : RC filter for PTRIP

R9 : Pull-up to VEXT (TH)

R10 : Pull-up to VEXT (FLTEN)

R11-17, C14-20 : Low pass filter for signal input

Prevention malfunction by noise

C4 -6 : Boot strap capacitor

R18-24 : Pull-down to VSS for signal input

Prevention malfunction by external wiring

IC1 : IPM

DB1 : Bridge diode

STK57FU394AGGEVB

OPERATION PROCEDURE

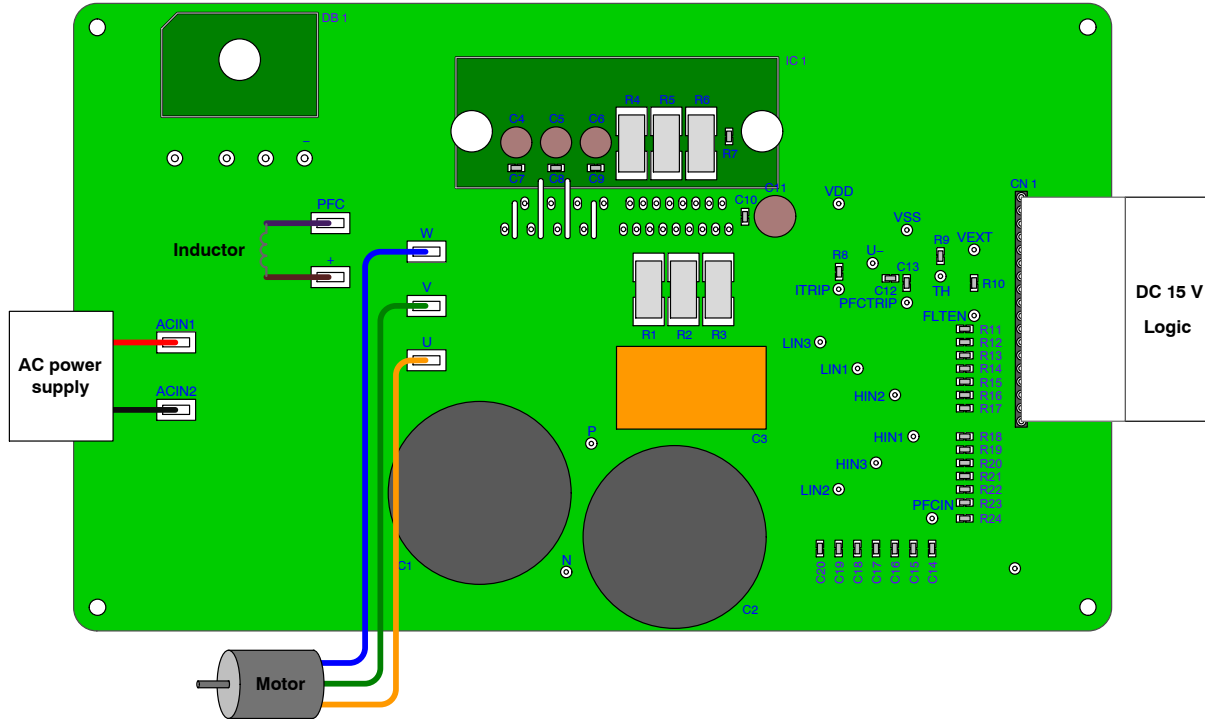


Figure 4. Connection Example


- Step 1. Connect IPM, the three power supplies, logic parts, inductor and the motor to the evaluation board, and confirm that each power supply is OFF at this time.
- Step 2. Apply DC 15 V to VDD and the logic I/O voltage to VEXT.
- Step 3. Perform a voltage setup according to specifications, and apply AC power supply between ACIN1 and ACIN2.

- Step 4. The IPM will start when signals are applied.
The low-side inputs must be switched on first to charge up the bootstrap capacitors.


NOTE: When turning off the power supply part and the logic part, please carry out in the reverse order to above steps.

STK57FU394AGGEVB

LAYOUT

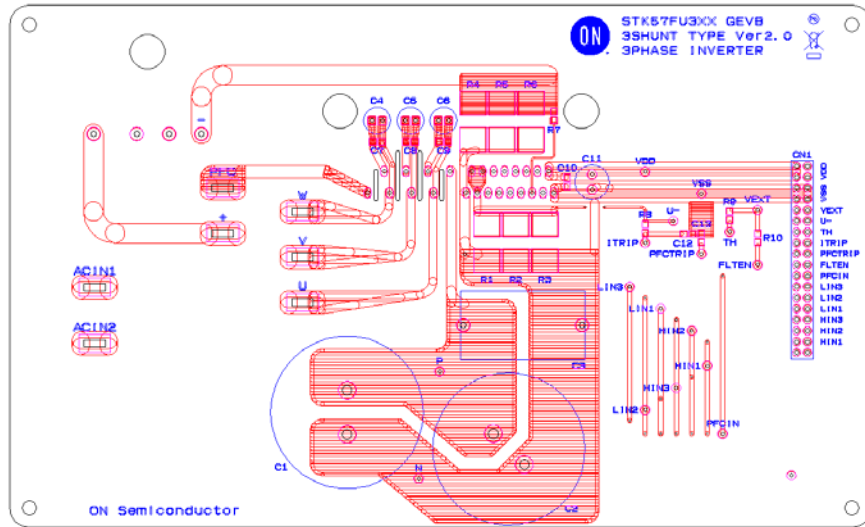

Top Side

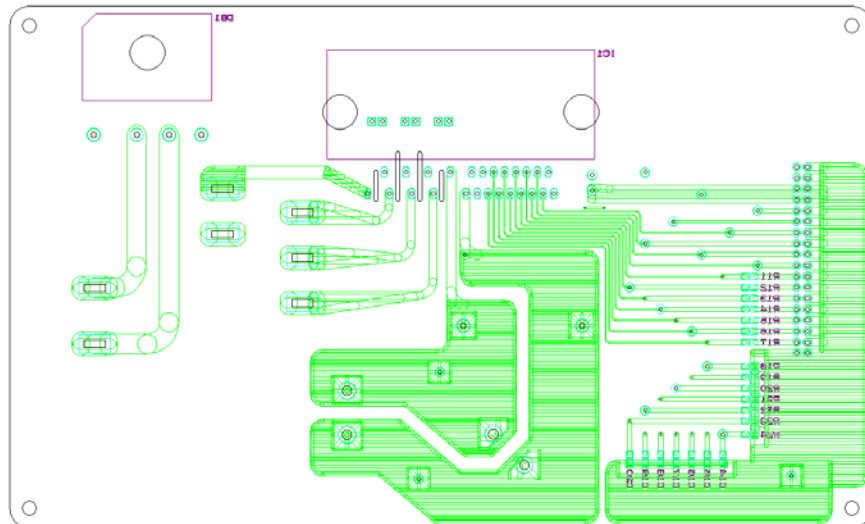

Back Side

Figure 5. Evaluation Board Layout (Top View)

Length: 121 mm

Side: 200 mm

Thickness: 1.6 mm

Rigid double-sided substrate (Material: FR-4)

Both sides resist coating

Copper foil thickness: 70 μm

STK57FU394AGGEVB

BILL OF MATERIALS

Table 1. BILL OF MATERIALS

Designator	Qty	Description	Value	Tolerance	Footprint	Manufacturer	Manufacturer Part Number	Substitution Allowed
R1, R2	2	Metal plate resistor	50 mΩ / 5 W	±10%		KOA	BPR58C50LK	Yes
R4, R5	2	Metal plate resistor	20 mΩ / 5 W	±10%		KOA	BPR58C20LK	Yes
R7	1		2 kΩ / 0.1 W	±1%	SMD 1608	KOA	RK73H1JTDD2001F	Yes
R8	1		200 Ω / 0.1 W	±1%	SMD 1608	KOA	RK73H1JTDD2000F	Yes
R9	1		20 kΩ / 0.1 W	±1%	SMD 1608	KOA	RK73H1JTDD2002F	Yes
R10	1		6.8 kΩ / 0.1 W	±1%	SMD 1608	KOA	RK73H1JTDD6801F	Yes
R11 – R17	7		100 Ω / 0.1 W	±1%	SMD 1608	KOA	RK73H1JTDD1000F	Yes
R18 – R24	7		3.3 kΩ / 0.1 W	±1%	SMD 1608	KOA	RK73H1JTDD3301F	Yes
C1, C2	2	Aluminum electrolytic capacitor	470 μF / 450 V	±20%	Through-hole	Rubycon	450MXC470MEFCSN35X50	Yes
C3	1	Film capacitor	2.2 μF / 630 V	±5%	Through-hole	PANASONIC	ECQE6225JT	Yes
C4 – C6	3		47 μF / 50 V	±20%	Through-hole	Nippon Chemi-Con	EKMG500ELL470MF11D	Yes
C7 – C10	4		0.1 μF / 50 V	±10%	SMD 1608	MURATA	GRM188B31H104K	Yes
C11	1	Aluminum electrolytic capacitor	220 μF / 35 V	±20%	Through-hole	Nippon Chemi-Con	EKMG350ELL221MHB5D	Yes
C12, C13	2		optional		SMD 1608			Yes
C14 – C20	7		100 pF / 50 V	±5%	SMD 1608	MURATA	GRM1882C1H101J	Yes
DB1	1	Bridge diode	25 A / 800 V		Through-hole	Shindengen	D25XB80	Yes
CN1	1	Connector	18 pin / 2.54 pitch		Through-hole	Hirose	A2-18PA-2.54DSA(71)	Yes
VSS, VDD, VEXT, U-, TH, ITRIP, PFCTRIIP, FLTEN, PFCIN, HIN1-3, LIN1-3, P, N	17	Test Pin			Through-hole	Mac8	ST-1-3	Yes
U, V, W, +, PFC, ACIN1, ACIN2	7	Faston terminal (Tab)			Through-hole			Yes
IC1	1	3 Phase Inverter IPM			Through-hole	ON Semiconductor	STK57FU394AG-E	No

NOTE All components are lead free.

HEAT SINK MOUNTING

Table 2. MOUNTING CONDITION

Item	Recommended Condition
Pitch	56.0 ± 0.1 mm (Please refer to Package Outline Diagram)
Screw	Diameter: M3 Screw head types: pan head, truss head, binding head
Washer	Plane washer The size is D = 7 mm, d = 3.2 mm and t = 0.5 mm JIS B 1256
Heat Sink	Material: Aluminum or Copper Warpage (the surface that contacts IPM): -50 to 100 μm Screw holes must be countersunk. No contamination on the heat sink surface that contacts IPM.
Torque	Temporary tightening: 20 to 30% of final tightening on first screw Temporary tightening: 20 to 30% of final tightening on second screw Final tightening: 0.6 to 0.9 Nm on first screw Final tightening: 0.6 to 0.9 Nm on second screw
Grease	Silicone grease Thickness: 100 to 200 μm Uniformly apply silicone grease to whole back. Thermal foils are only recommended after careful evaluation. Thickness, stiffness and compressibility parameters have a strong influence on performance.

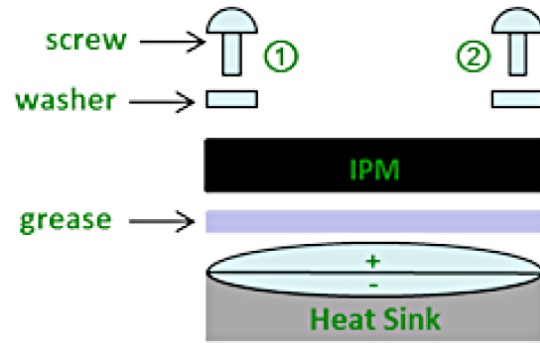


Figure 6. Mounting Composition

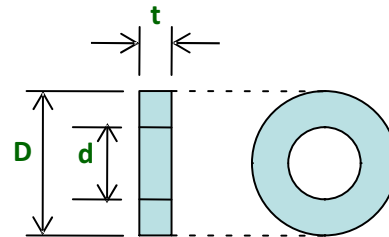


Figure 7. Size of Washer

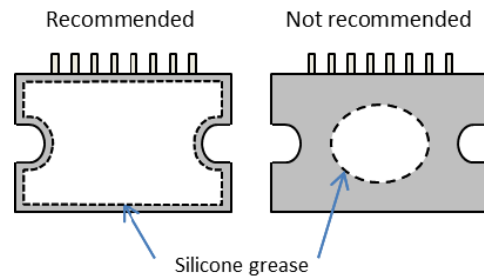


Figure 8. Uniform Application of Grease Recommended

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is as such not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and should as such only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

The board is delivered "AS IS" and without warranty of any kind including, but not limited to, that the board is production-worthy, that the functions contained in the board will meet your requirements, or that the operation of the board will be uninterrupted or error free. ON Semiconductor expressly disclaims all warranties, express, implied or otherwise, including without limitation, warranties of fitness for a particular purpose and non-infringement of intellectual property rights.

ON Semiconductor reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by ON Semiconductor shall not constitute any representation or warranty by ON Semiconductor, and no additional obligations or liabilities shall arise from ON Semiconductor having provided such information or services.

The boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. Should you purchase or use the board for any such unintended or unauthorized application, you shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

FCC WARNING – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by ON Semiconductor to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

ON Semiconductor does not convey any license under its patent rights nor the rights of others.

LIMITATIONS OF LIABILITY: ON Semiconductor shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if ON Semiconductor is advised of the possibility of such damages. In no event shall ON Semiconductor's aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

For more information and documentation, please visit www.onsemi.com.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT

North American Technical Support:

Voice Mail: 1 800-282-9855 Toll Free USA/Canada

Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative