



SHOWN FROM TOP SIDE

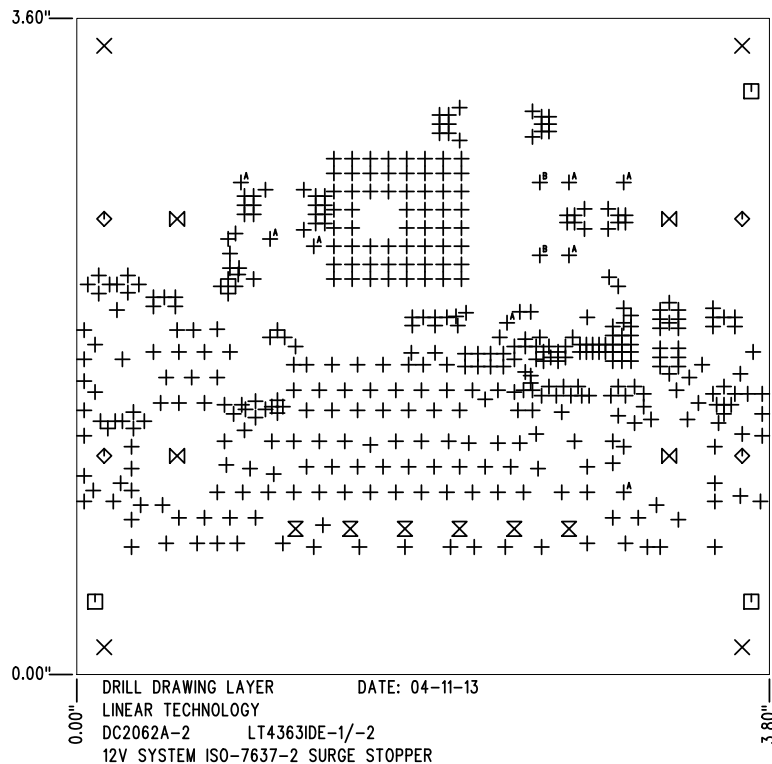

SIZE	QTY	SYM	PLATED	TOL
0.012	423	+	YES	+/-0.003"
0.187	4	×	NO	+/-0.003"
0.07	3	□	NO	+/-0.003"
0.094	4	◇	YES	+/-0.003"
0.064	6	⊗	YES	+/-0.003"
0.215	4	⊗	YES	+/-0.003"
0.025	8	+ ^A	YES	+/-0.003"
0.06	2	+ ^B	YES	+/-0.003"


REVISION HISTORY				
ECO	REV	DESCRIPTION	APP. ENG.	DATE
-	2	PRODUCTION	SAL A.	04-11-13


LAYER STRUCTURE

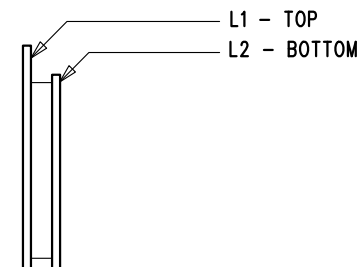

NOTES: UNLESS OTHERWISE SPECIFIED

- FAB PER IPC-A-600.
- MATERIAL: -LEAD FREE ASSEMBLY COMPLIANT, ISOLA FR-370HR
-FINISHED THICKNESS TO BE 0.062" +/- .005"
-TOTAL OF 2 LAYERS WITH 2 OZ. CU ON EACH.
-FLAMMABILITY RATING: 94 V-0 MINIMUM.
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00" ARE PRIMARY DATUMS.
- DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
-ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
-HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
- FINISH: -SMOBC USING LPI BOTH SIDES, COLOR GREEN.
-GOLD IMMERSION BOTH SIDES.
-FOR SILKSCREENS: USE WHITE NON-CONDUCTIVE INK.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
- PCBS ARE TO BE RoHS COMPLIANT.
- SCORING FOR PANELIZED PCB (PRODUCTION FAB ONLY):



UNLESS OTHERWISE SPECIFIED		APPROVALS		 <div> 1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 www.linear.com LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY </div>	
DIMENSIONS ARE IN INCHES TOLERANCES: 0.XX" = ±0.01" 0.XXX" = ±0.005" INTERPRET DIM AND TOL PER ASME Y14.5M-1994 THIRD ANGLE PROJECTION		PCB DES.	KIM T.		
		APP ENG.	SAL A.	TITLE: FABRICATION DRAWING	
				12V SYSTEM ISO-7637-2 SURGE STOPPER	
				SIZE	IC NO.
				N/A	LT4363IDE-1/-2
					DEMO CIRCUIT 2062A
				SCALE = NONE	REV 2
				FILENAME: DC2062A-2.PCB	SHT 1 OF 1