
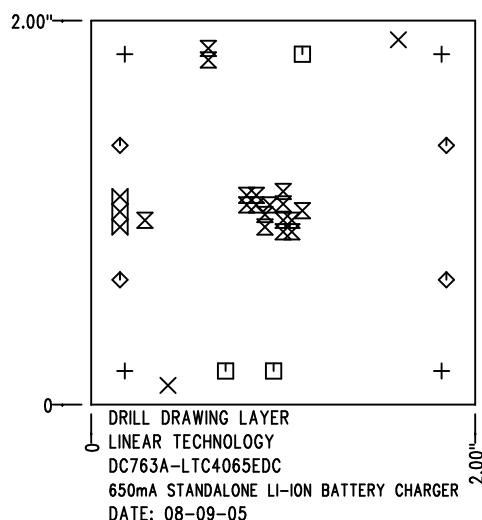


REVISIONS			
REV	DESCRIPTION	APPR	DATE
A	PROTOTYPE RELEASE		


SIZE	QTY	SYM	PLTD	TOL
0.19	4	+	YES	+/-0.0
0.07	2	×	NO	+/-0.0
0.064	3	□	YES	+/-0.0
0.094	4	◇	YES	+/-0.0
0.015	17	⊗	YES	+/-0.0
0.035	3	⊠	YES	+/-0.0

# **NOTES: UNLESS OTHERWISE SPECIFIED**

1. FAB PER IPC-A-600
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4  
FINISHED THICKNESS TO BE 0.062" +/- 0.006"  
TOTAL OF 4 LAYERS WITH 2 OZ. COPPER ON THE OUTER LAYERS AND 1 OZ. COPPER ON THE INTERNAL LAYERS.  
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. FINISH: SMOBC USING LPI BOTH SIDES, COLOR GREEN.  
SILVER IMMERSION (OMIKRON).  
FOR SILKSCREEN: USE WHITE NON-CONDUCTIVE INK.
4. DRILLING: DRILL HOLES PER SCHEDULE. ALL PLATED THROUGH HOLES WITH COPPER, 0.001" MIN. / 0.0015" MAX. COPPER PLATE  
ALL HOLE SIZES ARE SPECIFIED AFTER PLATING. HOLE LOCATION TOLERANCES ARE +/-0.01" IN RELATION TO CENTER
5. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
6. SCORING FOR PANELIZED PCB:

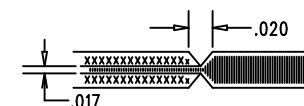

SHOWN FROM COMPONENT SIDE

APPROVALS			 <b>LINEAR TECHNOLOGY</b> 1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 LTC CONFIDENTIAL- FOR CUSTOMER USE ONLY	
	INIT	DATE		
DRAWN			<b>TITLE: FABRICATION DRAWING</b> <b>650mA STANDALONE LI-ION BATTERY CHARGER</b>	
CHECK				
DESIGN	KIM T.	08-09-05		
ENGR	KEVIN H.	08-09-05		
			SIZE	REV.
			A	A
SCALE = NONE			DES- 0000	SHT 1 of 1