fab.pho - Wed Aug 06 13:49:07 2003

REVISIONS			
REV	DESCRIPTION	APPR	DATE

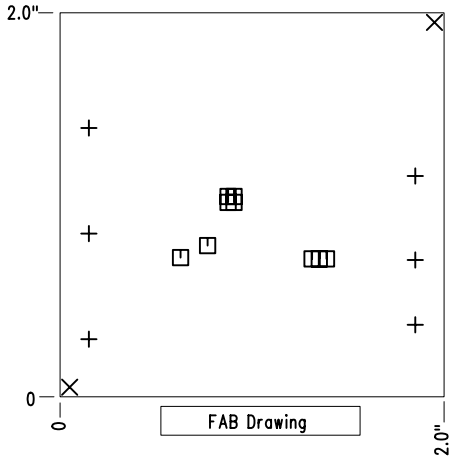

SIZE	QTY	SYM	PLTD
95	6	+	PLTD
70	2	×	NPLTD
15	9	⊔	PLTD

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.
   2 OZ. COPPER FINISHED ON OUTER LAYERS.
   1 OZ. COPPER FINISHED ON INNER LAYERS.
   THICKNESS .062 +/-.006 TOTAL OF 4 LAYERS.
   FLAMABILITY RATING: 94 V-0 MINIMUM .
3. DRILLLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
   HOLE LOCATION TOLERANCES ARE +/-.003 INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. SCORING:

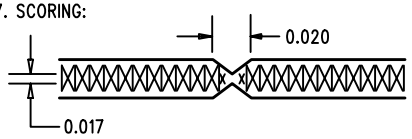

FAB DRAWING

APPROVALS	INIT	DATE
DRAWN		
CHECK		
DESIGN	JUNE WU	11/1/02
ENGR	TOM G.	11/1/02
SCALE = NONE		

LINEAR TECHNOLOGY
1630 McCarthy Blvd.
Milpitas, CA 95035
PH: (408)432-1900

TITLE: LTC3801ES6, 550kHz Micropower Step-Down DC/DC Controller

SIZE	DEMO	REV.
A	DC623A	A

DES-230587 | SHT 1 of 1