NTR5103N

MOSFET – Single, N-Channel, Small Signal, SOT-23

60 V, 310 mA

Features

- Low $R_{DS(on)}$
- Small Footprint Surface Mount Package
- Trench Technology
- These Devices are Pb−Free, Halogen Free/BFR Free and are RoHS Compliant

Applications

- Low Side Load Switch
- Level Shift Circuits
- DC−DC Converter
- Portable Applications i.e. DSC, PDA, Cell Phone, etc.


ON Semiconductor®

http://onsemi.com

$V_{(BR)DSS}$	$R_{DS(on)}$ MAX	I_D MAX (Note 1)
60 V	3.0 Ω @ 4.5 V	310 mA
	2.5 Ω @ 10 V	

Simplified Schematic

N−Channel



(Top View)

MAXIMUM RATINGS (T_J = 25°C unless otherwise stated)

Rating		Symbol	Value	Unit
Drain−to−Source Voltage		V_{DSS}	60	V
Gate−to−Source Voltage		V_{GS}	±30	V
Drain Current (Note 1)		I_D		mA
Steady State	T_A = 25°C		260	
	T_A = 85°C		190	
t < 5 s	T_A = 25°C		310	
	T_A = 85°C		220	
Power Dissipation (Note 1)		P_D		mW
Steady State			300	
t < 5 s			420	
Pulsed Drain Current (t_p = 10 μs)		I_{DM}	1.2	A
Operating Junction and Storage Temperature Range		T_J, T_{STG}	−55 to +150	°C
Source Current (Body Diode)		I_S	300	mA
Lead Temperature for Soldering Purposes (1/8″ from case for 10 s)		T_L	260	°C


Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

THERMAL CHARACTERISTICS


Characteristic	Symbol	Max	Unit
Junction−to−Ambient − Steady State (Note 1)	$R_{\theta JA}$	417	°C/W
Junction−to−Ambient − t ≤ 5 s (Note 1)	$R_{\theta JA}$	300	

1. Surface−mounted on FR4 board using 1 in sq pad size (Cu area = 1.127 in sq [1 oz] including traces)

MARKING DIAGRAM & PIN ASSIGNMENT



SOT−23
CASE 318
STYLE 21



TJ4 = Device Code
M = Date Code
▪ = Pb−Free Package
(Note: Microdot may be in either location)

ORDERING INFORMATION

Device	Package	Shipping†
NTR5103NT1G	SOT−23 (Pb−Free)	3000 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

© Semiconductor Components Industries, LLC, 2014

ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition		Min	Typ	Max	Units
OFF CHARACTERISTICS							
Drain−to−Source Breakdown Voltage	$V_{(BR)DSS}$	V_{GS} = 0 V, I_D = 250 μA		60			V
Drain−to−Source Breakdown Voltage Temperature Coefficient	$V_{(BR)DSS}/T_J$				75		mV/°C
Zero Gate Voltage Drain Current	I_{DSS}	V_{GS} = 0 V, V_{DS} = 60 V	T_J = 25°C			1	μA
			T_J = 125°C			500	
Gate−to−Source Leakage Current	I_{GSS}	V_{DS} = 0 V, V_{GS} = ±30 V				200	nA
ON CHARACTERISTICS (Note 2)							
Gate Threshold Voltage	$V_{GS(TH)}$	V_{GS} = V_{DS}, I_D = 250 μA		1.9		2.6	V
Negative Threshold Temperature Coefficient	$V_{GS(TH)}/T_J$				4.4		mV/°C
Drain−to−Source On Resistance	$R_{DS(on)}$	V_{GS} = 10 V, I_D = 240 mA			1.0	2.5	Ω
		V_{GS} = 4.5 V, I_D = 50 mA			1.4	3.0	
Forward Transconductance	g_{FS}	V_{DS} = 5 V, I_D = 200 mA			530		mS
CHARGES AND CAPACITANCES							
Input Capacitance	C_{ISS}	V_{GS} = 0 V, f = 1 MHz, V_{DS} = 25 V			26.7	40	pF
Output Capacitance	C_{OSS}				4.6		
Reverse Transfer Capacitance	C_{RSS}				2.9		
Total Gate Charge	$Q_{G(TOT)}$	V_{GS} = 5 V, V_{DS} = 10 V; I_D = 240 mA			0.81		nC
Threshold Gate Charge	$Q_{G(TH)}$				0.31		
Gate−to−Source Charge	Q_{GS}				0.48		
Gate−to−Drain Charge	Q_{GD}				0.08		
SWITCHING CHARACTERISTICS, V_{GS} = V (Note 3)							
Turn−On Delay Time	$t_{d(ON)}$	V_{GS} = 10 V, V_{DD} = 30 V, I_D = 200 mA, R_G = 10 Ω			1.7		ns
Rise Time	t_r				1.2		
Turn−Off Delay Time	$t_{d(OFF)}$				4.8		
Fall Time	t_f				3.6		
DRAIN−SOURCE DIODE CHARACTERISTICS							
Forward Diode Voltage	V_{SD}	V_{GS} = 0 V, I_S = 200 mA	T_J = 25°C		0.79	1.2	V
			T_J = 85°C		0.7		

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

2. Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%
3. Switching characteristics are independent of operating junction temperatures

TYPICAL CHARACTERISTICS

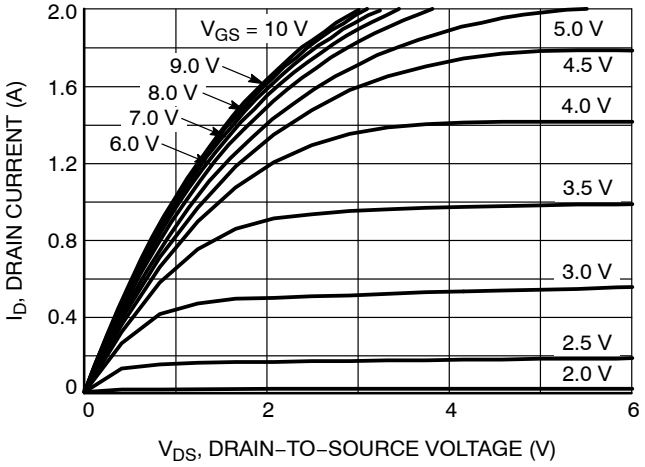


Figure 1. On−Region Characteristics

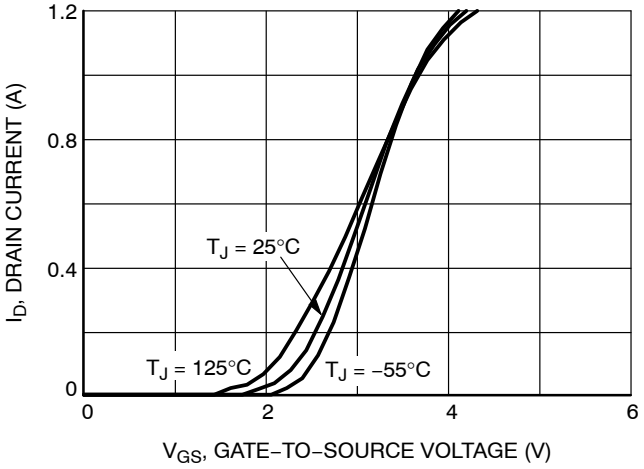


Figure 2. Transfer Characteristics

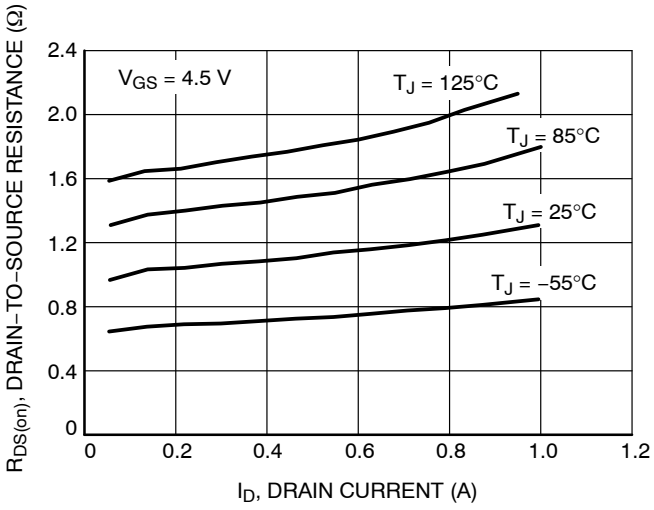


Figure 3. On−Resistance vs. Drain Current and Temperature

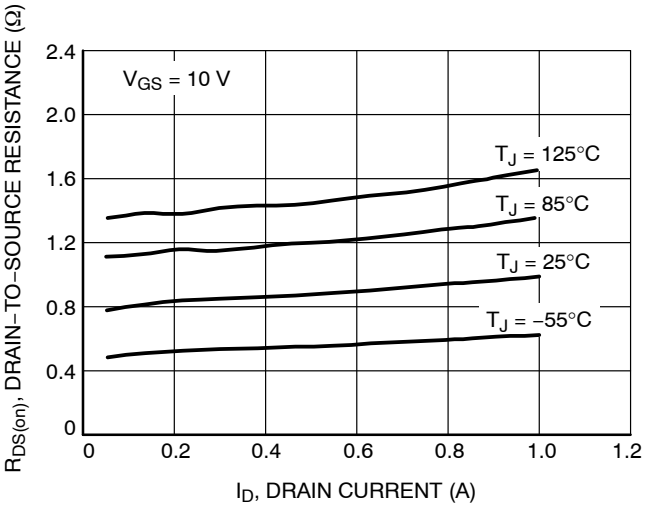


Figure 4. On−Resistance vs. Drain Current and Temperature

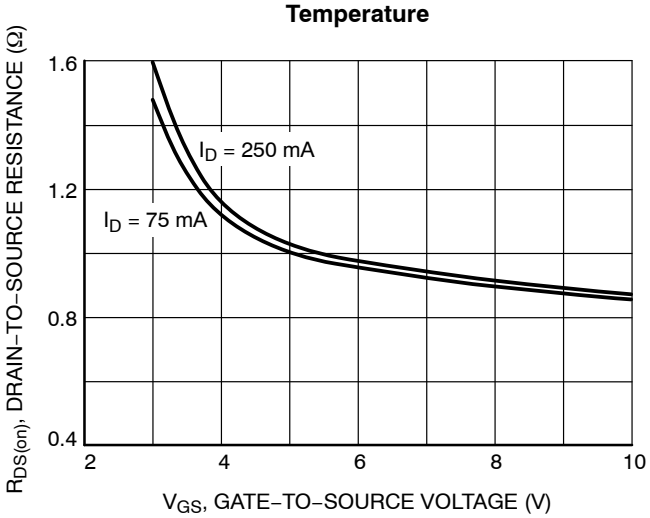


Figure 5. On−Resistance vs. Gate−to−Source Voltage

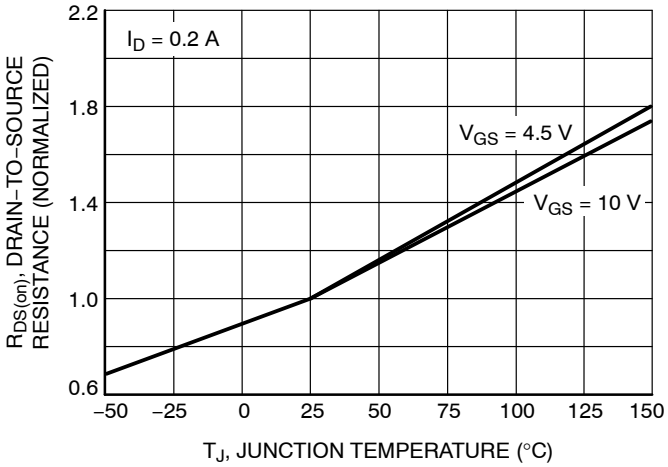


Figure 6. On−Resistance Variation with Temperature

TYPICAL CHARACTERISTICS

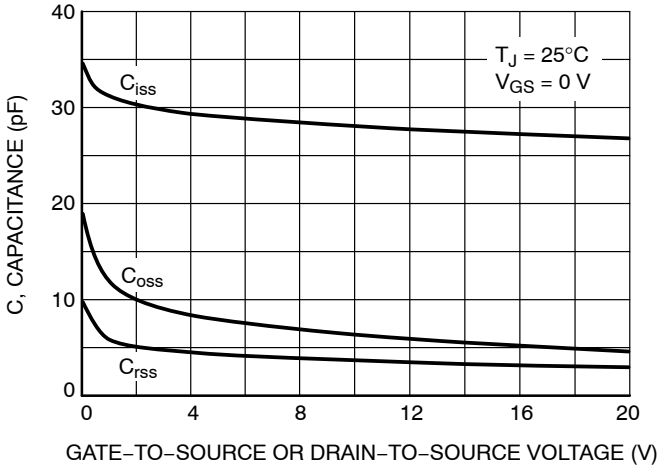


Figure 7. Capacitance Variation

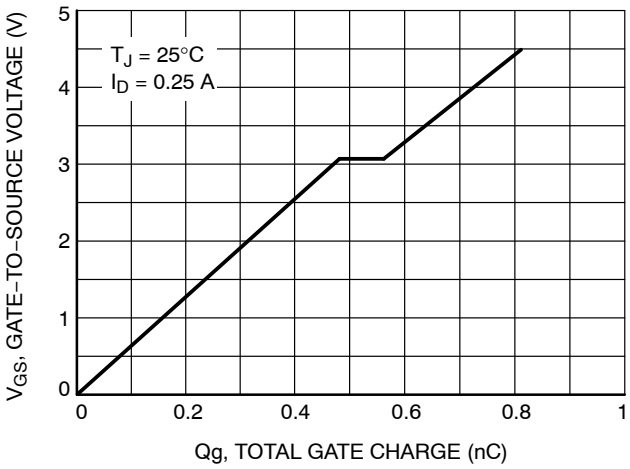


Figure 8. Gate−to−Source and Drain−to−Source Voltage vs. Total Charge


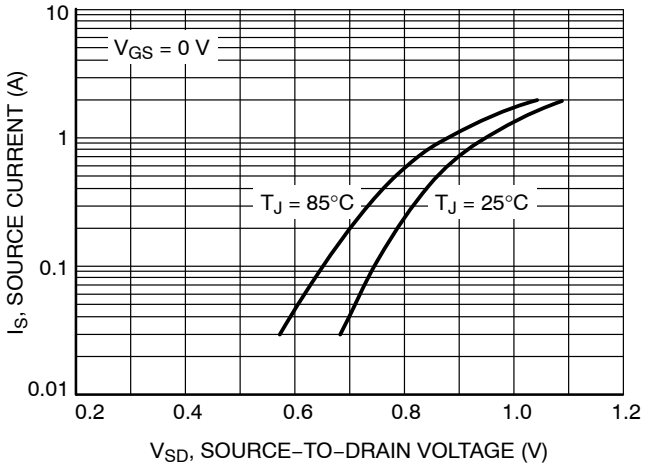


Figure 9. Diode Forward Voltage vs. Current

PACKAGE DIMENSIONS

SOT−23 (TO−236)
CASE 318−08
ISSUE AP

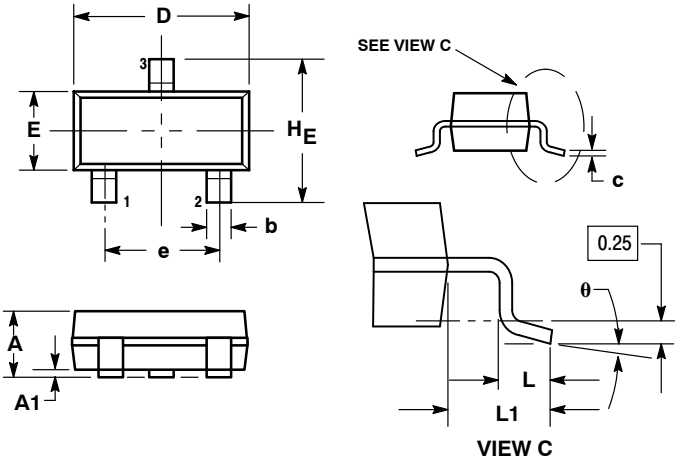


NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: INCH.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

	MILLIMETERS			INCHES		
DIM	MIN	NOM	MAX	MIN	NOM	MAX
A	0.89	1.00	1.11	0.035	0.040	0.044
A1	0.01	0.06	0.10	0.001	0.002	0.004
b	0.37	0.44	0.50	0.015	0.018	0.020
c	0.09	0.13	0.18	0.003	0.005	0.007
D	2.80	2.90	3.04	0.110	0.114	0.120
E	1.20	1.30	1.40	0.047	0.051	0.055
e	1.78	1.90	2.04	0.070	0.075	0.081
L	0.10	0.20	0.30	0.004	0.008	0.012
L1	0.35	0.54	0.69	0.014	0.021	0.029
H_E	2.10	2.40	2.64	0.083	0.094	0.104
θ	0°	−−−	10°	0°	−−−	10°

STYLE 21:
PIN 1. GATE
2. SOURCE
3. DRAIN

SOLDERING FOOTPRINT

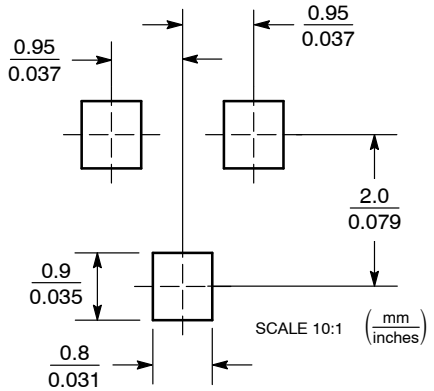

ON Semiconductor and ON are registered trademarks of Semiconductor Components Industries, LLC (SCILLC). SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:
Literature Distribution Center for ON Semiconductor
P.O. Box 5163, Denver, Colorado 80217 USA
Phone: 303−675−2175 or 800−344−3860 Toll Free USA/Canada
Fax: 303−675−2176 or 800−344−3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800−282−9855 Toll Free USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81−3−5817−1050

ON Semiconductor Website: **www.onsemi.com**

Order Literature: http://www.onsemi.com/orderlit

For additional information, please contact your local Sales Representative

NTR5103N/D