IXYS


GenX3™ 600V IGBTs w/ Diode

IXGA30N60C3D4*
IXGP30N60C3D4


*Obsolete Part Number

V_{CES} = 600V
I_{C110} = 30A
$V_{CE(sat)}$ ≤ 3.0V
$t_{fi(typ)}$ = 47ns


High-Speed PT IGBTs for 40-100kHz Switching



TO-263 AA (IXGA)



TO-220AB (IXGP)



Symbol	Test Conditions	Maximum Ratings	
V_{CES}	T_C = 25°C to 150°C	600	V
V_{CGR}	T_J = 25°C to 150°C, R_{GE} = 1MΩ	600	V
V_{GES}	Continuous	± 20	V
V_{GEM}	Transient	± 30	V
I_{C25}	T_C = 25°C	60	A
I_{C110}	T_C = 110°C	30	A
I_{CM}	T_C = 25°C, 1ms	150	A
SSOA (RBSOA)	V_{GE} = 15V, T_{VJ} = 125°C, R_G = 5Ω Clamped Inductive Load	I_{CM} = 60 @ ≤ V_{CES}	A
P_C	T_C = 25°C	220	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	1.6mm (0.062 in.) from Case for 10s	300	°C
T_{SOLD}	Plastic Body for 10 seconds	260	°C
M_d	Mounting Torque (TO-220)	1.13/10	Nm/lb.in.
Weight	TO-220 TO-263	2.5 3.0	g g

G = Gate D = Collector
S = Emitter Tab = Collector

Features

- Optimized for Low Switching Losses
- Square RBSOA
- Anti-Parallel Ultra Fast Diode
- International Standard Packages

Advantages

- High Power Density
- Low Gate Drive Requirement

Applications

- Power Inverters
- UPS
- Motor Drives
- SMPS
- PFC Circuits
- Battery Chargers
- Welding Machines
- Lamp Ballasts
- High Frequency Power Inverters

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{CES}	I_C = 250μA, V_{GE} = 0V	600			V
$V_{GE(th)}$	I_C = 250μA, V_{CE} = V_{GE}	4.0		5.5	V
I_{CES}	V_{CE} = V_{CES}, V_{GE} = 0V			75	μA
	T_J = 125°C			500	μA
I_{GES}	V_{CE} = 0V, V_{GE} = ± 20V			±100	nA
$V_{CE(sat)}$	I_C = 20A, V_{GE} = 15V, Note 1		2.6	3.0	V
	T_J = 125°C		1.8		V

© 2011 IXYS CORPORATION, All Rights Reserved


Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	I_C = 20A, V_{CE} = 10V, Note 1	9	16		S
C_{ies}	V_{CE} = 25V, V_{GE} = 0V, f = 1MHz		915		pF
C_{oes}			78		pF
C_{res}			32		pF
Q_g	I_C = 20A, V_{GE} = 15V, V_{CE} = 0.5 • V_{CES}		38		nC
Q_{ge}			8		nC
Q_{gc}			17		nC
$t_{d(on)}$	**Inductive Load, T_J = 25°C** I_C = 20A, V_{GE} = 15V V_{CE} = 300V, R_G = 5Ω		16		ns
t_{ri}			26		ns
E_{on}			0.27		mJ
$t_{d(off)}$			42	75	ns
t_{fi}			47		ns
E_{off}			0.09	0.18	mJ
$t_{d(on)}$	**Inductive Load, T_J = 125°C** I_C = 20A, V_{GE} = 15V V_{CE} = 300V, R_G = 5Ω		17		ns
t_{ri}			28		ns
E_{on}			0.44		mJ
$t_{d(off)}$			70		ns
t_{fi}			90		ns
E_{off}			0.33		mJ
R_{thJC}				0.56	°C/W
R_{thCS}	TO-220		0.50		°C/W

Reverse Diode (FRED)


Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)		Characteristic Values Min.	Typ.	Max.	
V_F	I_F = 10A, V_{GE} = 0V, Note 1				3.0	V
		T_J = 150°C		1.7		V
t_{rr}	I_F = 10A, -di_F/dt = 200A/μs V_R = 300V	T_J = 100°C		60		ns
I_{RM}		T_J = 25°C			3	A
		T_J = 100°C			4	A
R_{thJC}					2.5	°C/W

Note 1: Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.

TO-263 Outline

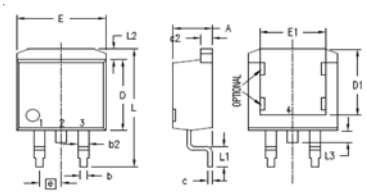


1 = Gate
2 = Collector
3 = Emitter
4 = Collector



SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.160	.190	4.06	4.83
A1	.080	.110	2.03	2.79
b	.020	.039	0.51	0.99
b2	.045	.055	1.14	1.40
c	.016	.029	0.40	0.74
c2	.045	.055	1.14	1.40
D	.340	.380	8.64	9.65
D1	.315	.350	8.00	8.89
E	.380	.410	9.65	10.41
E1	.245	.320	6.22	8.13
e	.100 BSC		2.54 BSC	
L	.575	.625	14.61	15.88
L1	.090	.110	2.29	2.79
L2	.040	.055	1.02	1.40
L3	.050	.070	1.27	1.78
L4	0	.005	0	0.13

TO-220 Outline

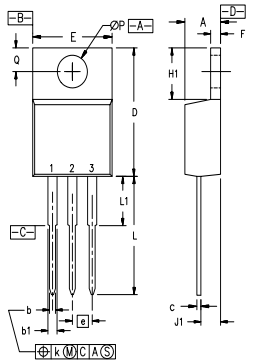

1 = Gate 2 = Collector
3 = Emitter

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.170	.190	4.32	4.83
b	.025	.040	0.64	1.02
b1	.045	.065	1.15	1.65
c	.014	.022	0.35	0.56
D	.580	.630	14.73	16.00
E	.390	.420	9.91	10.66
e	.100 BSC		2.54 BSC	
F	.045	.055	1.14	1.40
H1	.230	.270	5.85	6.85
J1	.090	.110	2.29	2.79
k	0	.015	0	0.38
L	.500	.550	12.70	13.97
L1	.110	.230	2.79	5.84
ØP	.139	.161	3.53	4.08
Q	.100	.125	2.54	3.18

IXYS Reserves the Right to Change Limits, Test Conditions and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,850,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

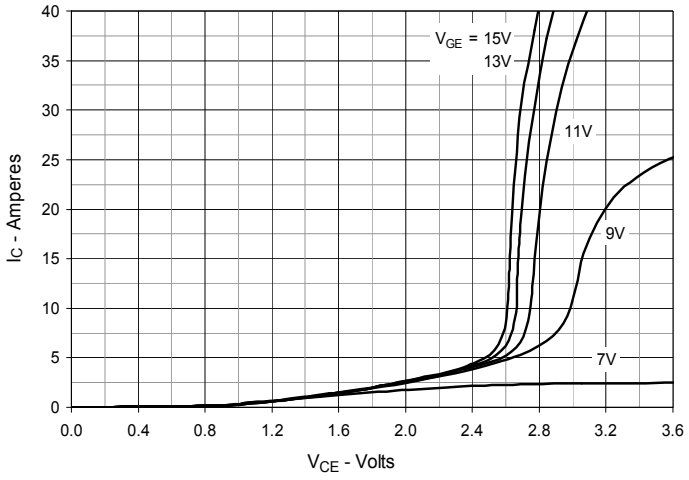


Fig. 2. Extended Output Characteristics @ T_J = 25ºC

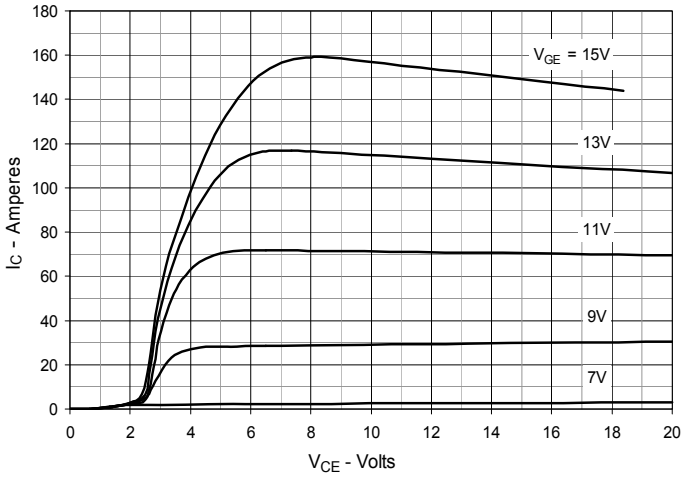


Fig. 3. Output Characteristics @ T_J = 125ºC

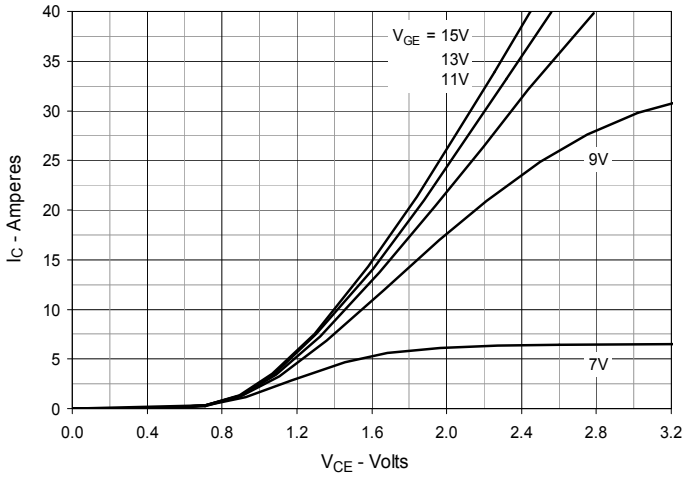


Fig. 4. Dependence of $V_{CE(sat)}$ on JunctionTemperature

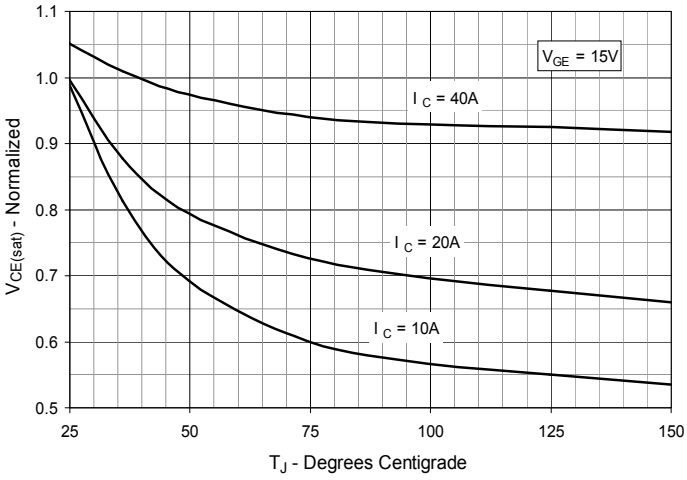


Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emitter Voltage


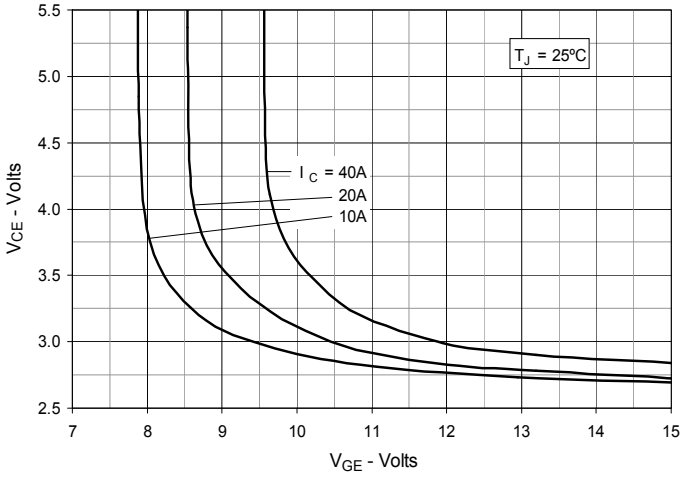


Fig. 6. Input Admittance

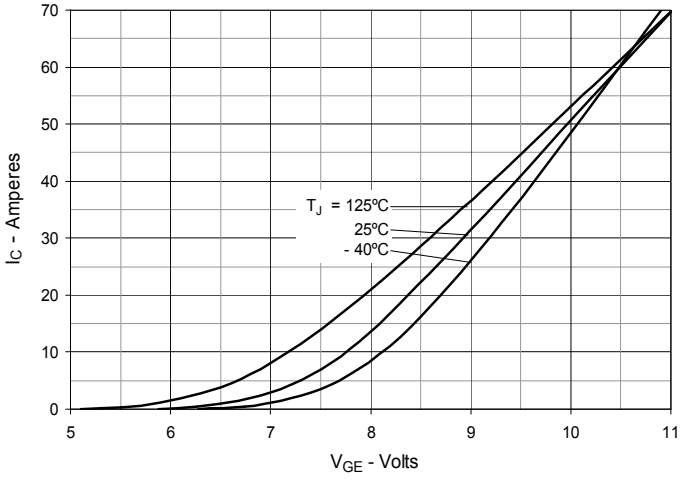

© 2011 IXYS CORPORATION, All Rights Reserved

Fig. 7. Transconductance

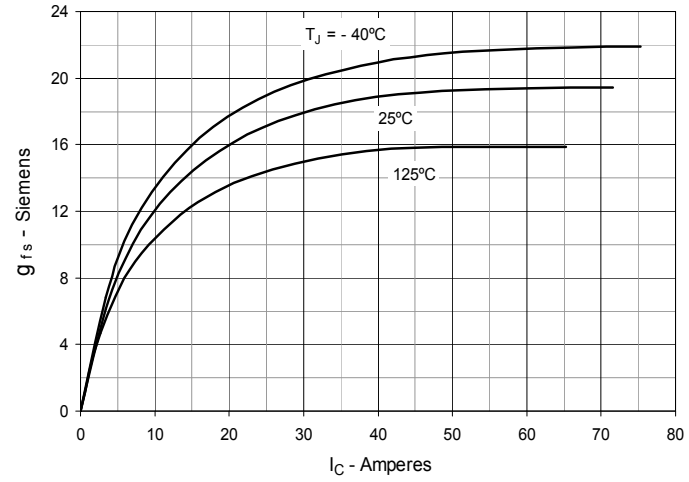


Fig. 8. Gate Charge

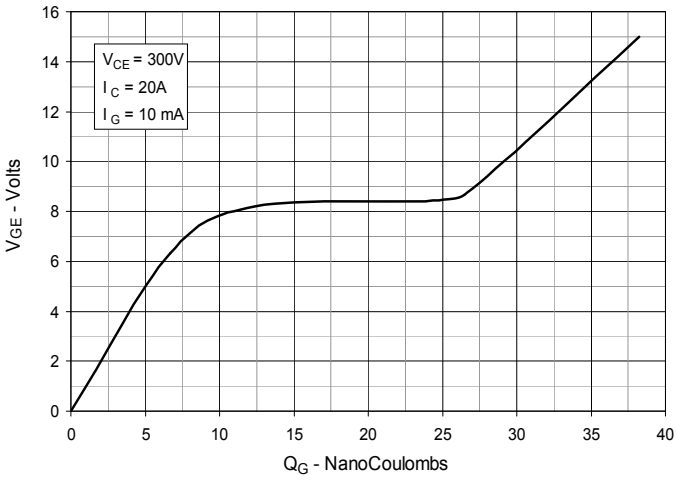


Fig. 9. Capacitance

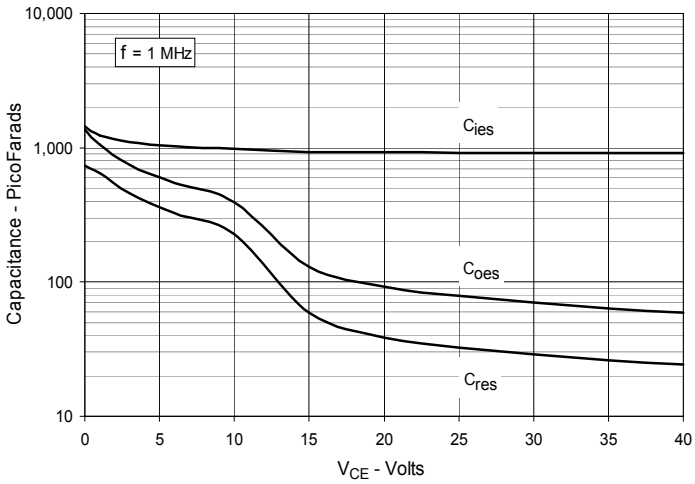


Fig. 10. Reverse-Bias Safe Operating Area


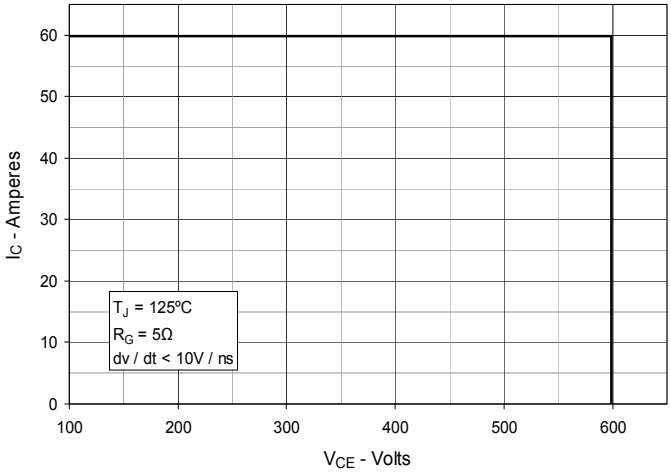


Fig. 11. Maximum Transient Thermal Impedance

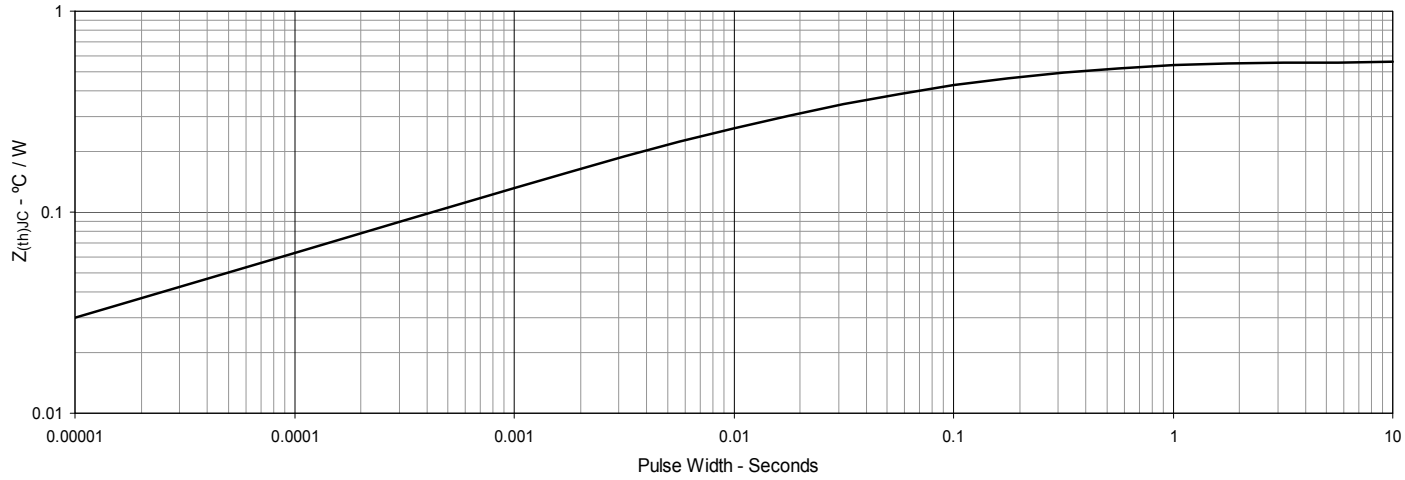

IXYS Reserves the Right to Change Limits, Test Conditions and Dimensions.

Fig. 12. Inductive Switching Energy Loss vs. Gate Resistance

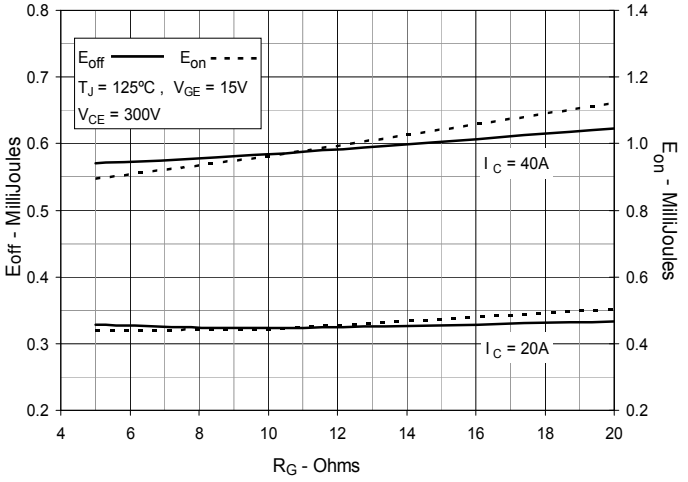


Fig. 13. Inductive Switching Energy Loss vs. Collector Current

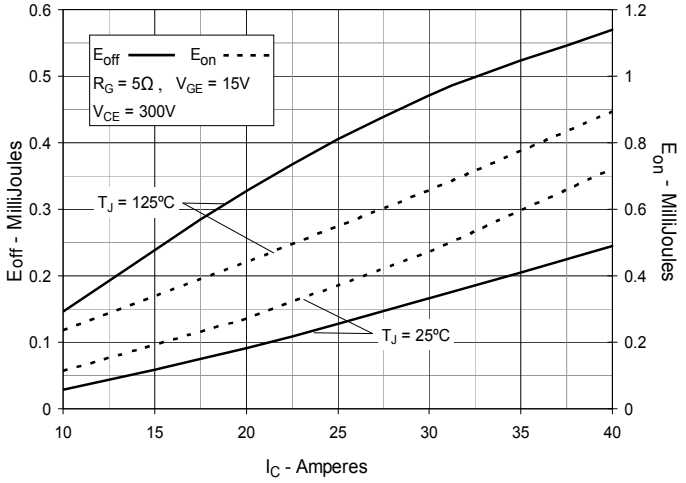


Fig. 14. Inductive Switching Energy Loss vs. Junction Temperature

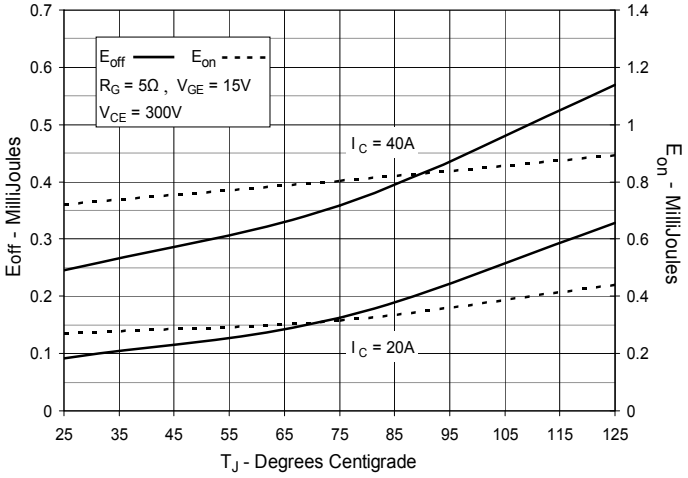


Fig. 15. Inductive Turn-off Switching Times vs. Gate Resistance

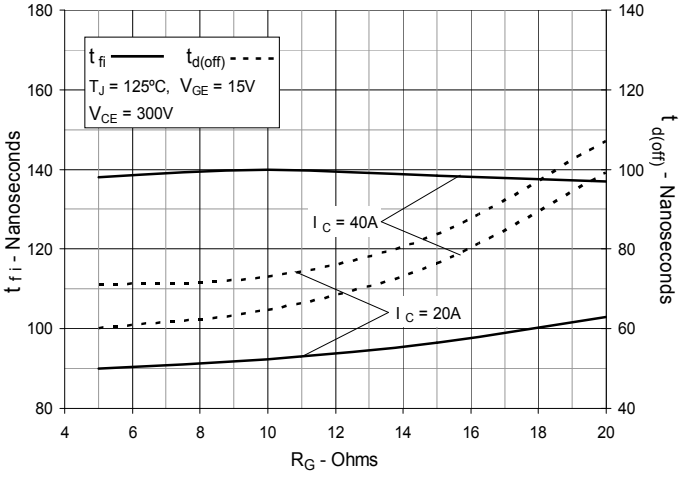


Fig. 16. Inductive Turn-off Switching Times vs. Collector Current


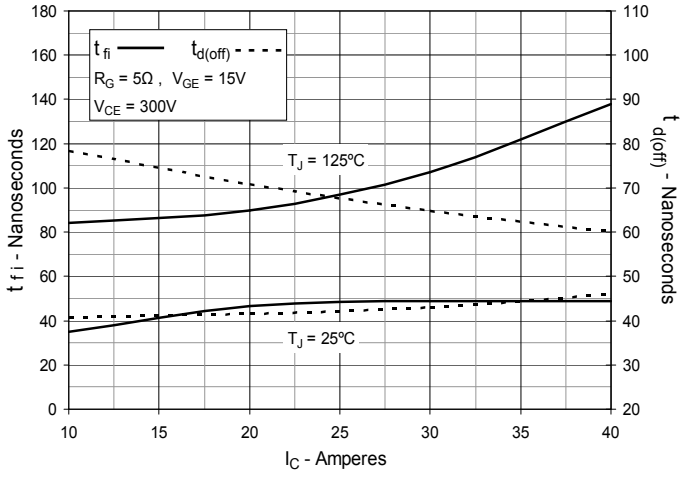


Fig. 17. Inductive Turn-off Switching Times vs. Junction Temperature

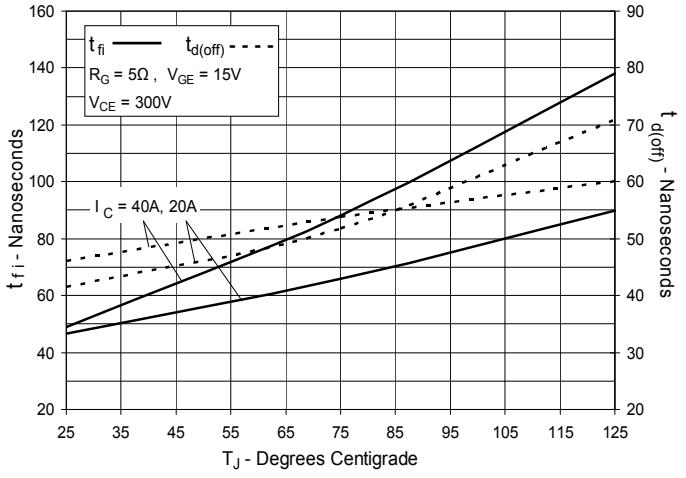

© 2011 IXYS CORPORATION, All Rights Reserved

Fig. 18. Inductive Turn-on Switching Times vs. Gate Resistance

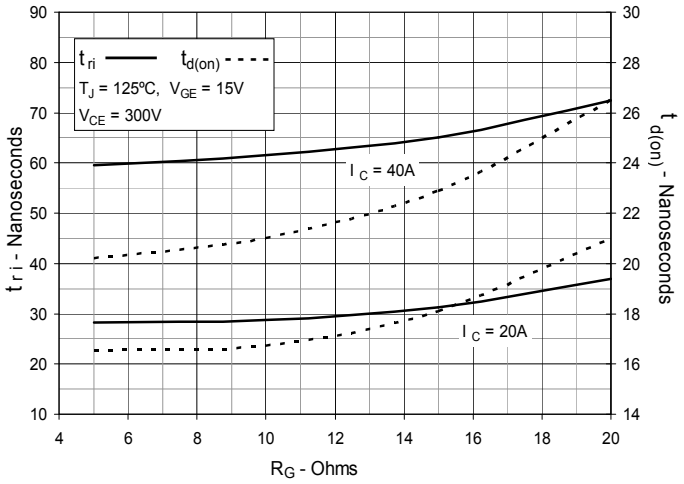


Fig. 19. Inductive Turn-on Switching Times vs. Collector Current


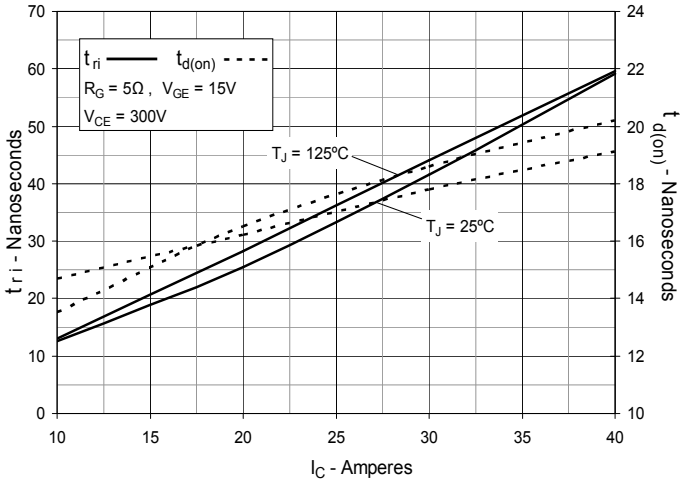


Fig. 20. Inductive Turn-on Switching Times vs. Junction Temperature

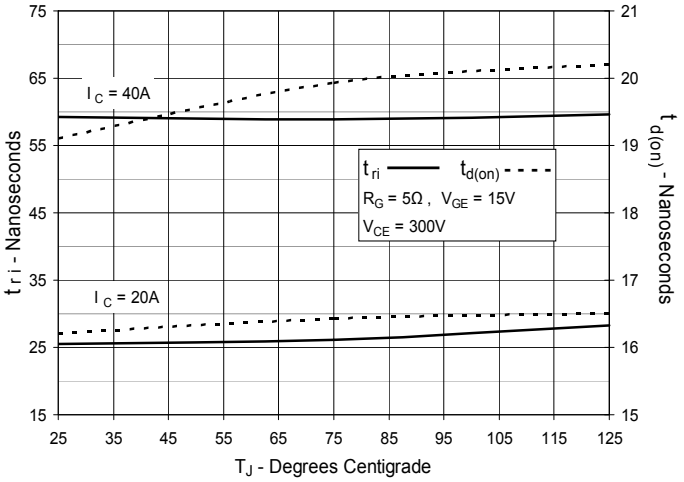

IXYS Reserves the Right to Change Limits, Test Conditions and Dimensions.

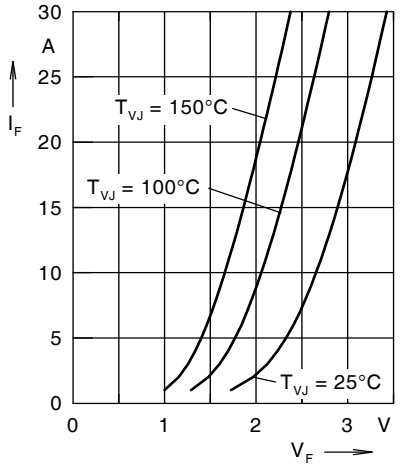


Fig. 21. Forward current I_F versus V_F

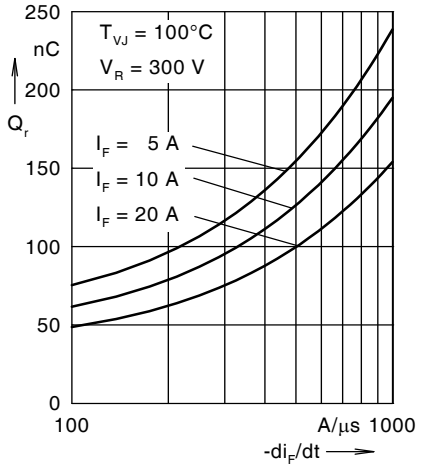


Fig. 22. Reverse recovery charge Q_r

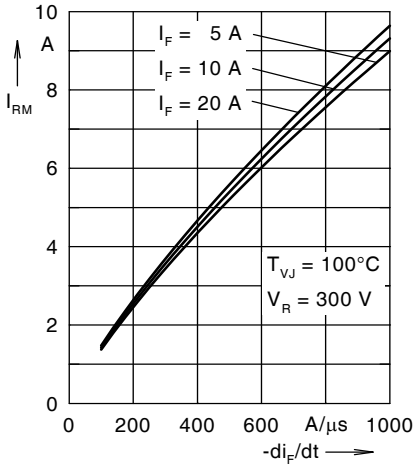


Fig. 23. Peak reverse current I_{RM}

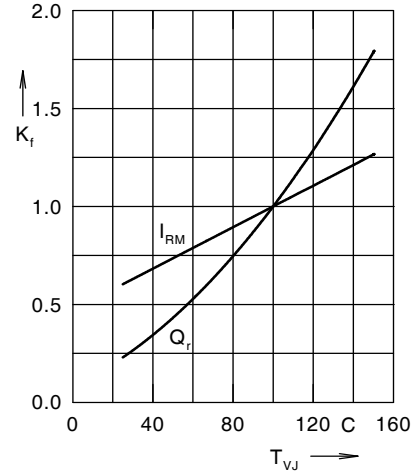


Fig. 24. Dynamic parameters Q_r, I_{RM}

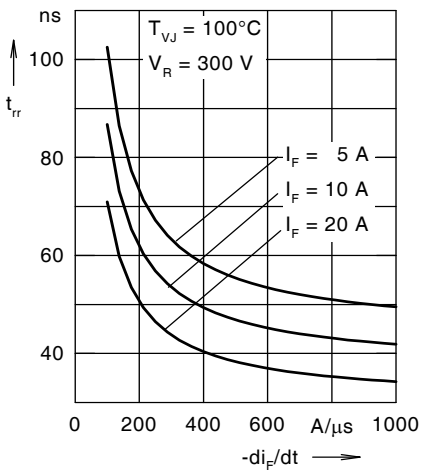


Fig. 25. Recovery time t_{rr} versus $-di_F/dt$

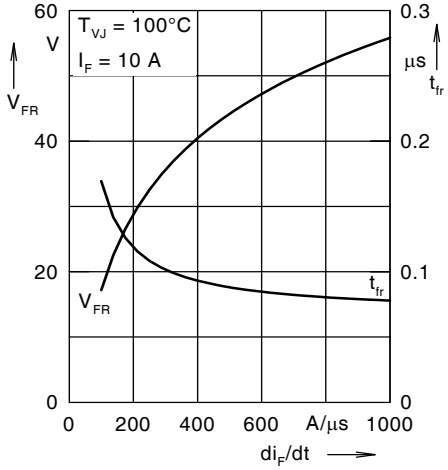


Fig. 26. Peak forward voltage V_{FR} and

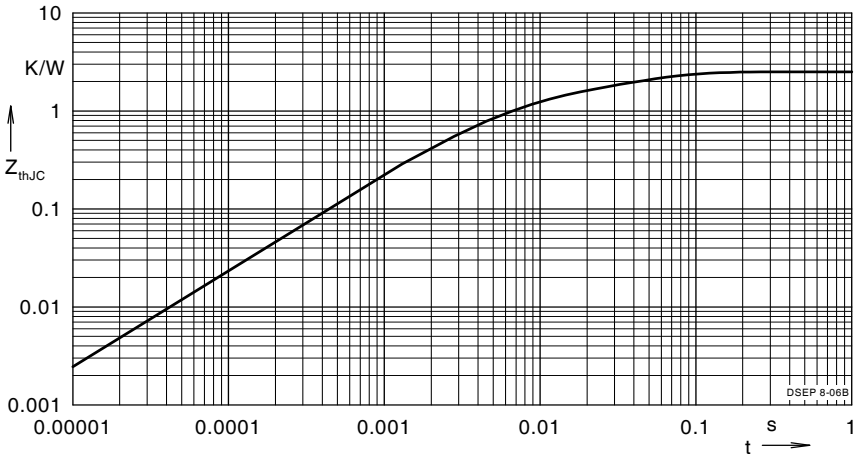


Fig. 27. Transient thermal resistance junction-to-case

NOTE: Fig. 2 to Fig. 6 shows typical values

© 2011 IXYS CORPORATION, All Rights Reserved



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.