


| SIZE | QTY | SYM | PLTD |
|------|-----|-----|-------|
| 95 | 4 | + | PLTD |
| 15 | 5 | X | PLTD |
| 70 | 2 | □ | NPLTD |

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4, 2 OZ. COPPER THICKNESS .062 +/- .006 TOTAL OF 2 LAYERS.
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR GREEN.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.

7. SCORING:

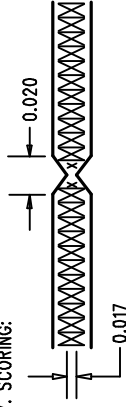

FAB DRAWING

| | | | | | |
|------------------|--|----------------------------------|----------------|--|------------|
| APPROVALS | | | | LINEAR TECHNOLOGY 1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900 | |
| | | DRAWN CHECK DESIGN ENGR | INIT DATE | TITLE: Single or Dual Li-Ion Step-Down to 1.8V | |
| SCALE = NONE | | SIZE A | DEMO DC419A | REV. A | SHT 1 of 1 |