IXYS


Preliminary Technical Information

TrenchT4™ Power MOSFET


IXTA270N04T4
IXTA270N04T4-7

V_{DSS} = 40V
I_{D25} = 270A
$R_{DS(on)}$ ≤ 2.2mΩ

N-Channel Enhancement Mode
Avalanche Rated




TO-263 AA



G = Gate D = Drain
S = Source Tab = Drain

TO-263 (7-Leads)



Pins: 1 - Gate
2, 3, 5 , 6 , 7 - Source
4 (Tab) - Drain

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 175°C	40	V
V_{DGR}	T_J = 25°C to 175°C, R_{GS} = 1MΩ	40	V
V_{GSM}	Transient	±15	V
I_{D25}	T_C = 25°C	270	A
I_{LRMS}	Lead Current Limit, RMS	160	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}	800	A
I_A	T_C = 25°C	135	A
E_{AS}	T_C = 25°C	750	mJ
I_A	T_C = 25°C	270	A
E_{AS}	T_C = 25°C	350	mJ
P_D	T_C = 25°C	375	W
T_J		-55 ... +175	°C
T_{JM}		175	°C
T_{stg}		-55 ... +175	°C
T_L	Maximum Lead Temperature for Soldering	300	°C
T_{SOLD}	1.6 mm (0.062in.) from Case for 10s	260	°C
F_C	Mounting Force (TO-263)	10.65 / 2.2..14.6	N/lb
Weight	TO-263	2.5	g
	TO-263 (7Leads)	3.0	g

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 250μA	40			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 250μA	2.0		4.0	V
I_{GSS}	V_{GS} = ±15V, V_{DS} = 0V			±200	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			5	μA
	T_J = 150°C			750	μA
$R_{DS(on)}$	V_{GS} = 10V, I_D = 50A, Note 1			2.2	mΩ

Features

- International Standard Packages
- 175°C Operating Temperature
- High Current Handling Capability
- Avalanche Rated
- Low $R_{DS(on)}$

Advantages

- Easy to Mount
- Space Savings
- High Power Density

Applications

- Synchronous Buck Converters
- High Current Switching Power Supplies
- Battery Powered Electric Motors
- Resonant-Mode Power Supplies
- Electronics Ballast Application
- Class D Audio Amplifiers

© 2016 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = 10V, I_D = 60A, Note 1	90	150		S
R_{Gi}	Gate Input Resistance		1.4		Ω
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		9140		pF
C_{oss}			1450		pF
C_{rss}			980		pF
$t_{d(on)}$	**Resistive Switching Times**		18		ns
t_r	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 135A		28		ns
$t_{d(off)}$	R_G = 2Ω (External)		72		ns
t_f			23		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		182		nC
Q_{gs}			45		nC
Q_{gd}			67		nC
R_{thJC}				0.40	°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			270	A
I_{SM}	Repetitive, Pulse width limited by T_{JM}			1080	A
V_{SD}	I_F = 100A, V_{GS} = 0V, Note 1			1.4	V
t_{rr}	I_F = 150A, V_{GS} = 0V		48		ns
I_{RM}	-di/dt = 100A/μs		1.8		A
Q_{RM}	V_R = 30V		43		nC

Notes: 1. Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.
2. On through-hole packages, $R_{DS(on)}$ Kelvin test contact location must be 5mm or less from the package body.

PRELIMINARY TECHNICAL INFORMATION

The product presented herein is under development. The Technical Specifications offered are derived from a subjective evaluation of the design, based upon prior knowledge and experience, and constitute a "considered reflection" of the anticipated result. IXYS reserves the right to change limits, test conditions, and dimensions without notice.

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,860,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

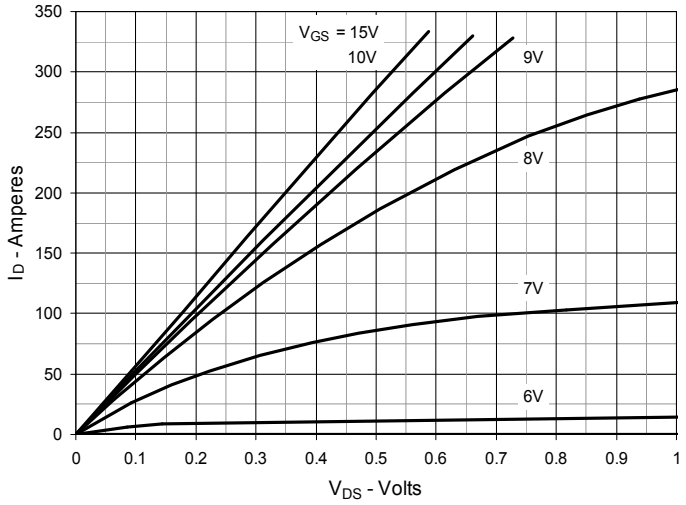


Fig. 2. Extended Output Characteristics @ T_J = 25ºC

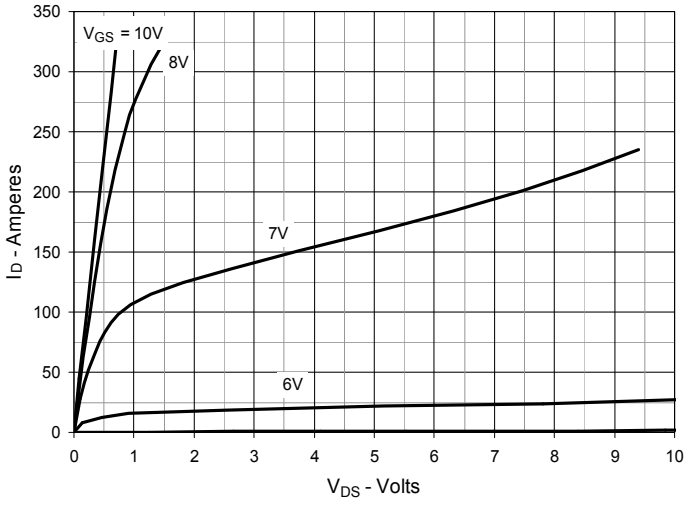


Fig. 3. Output Characteristics @ T_J = 150ºC

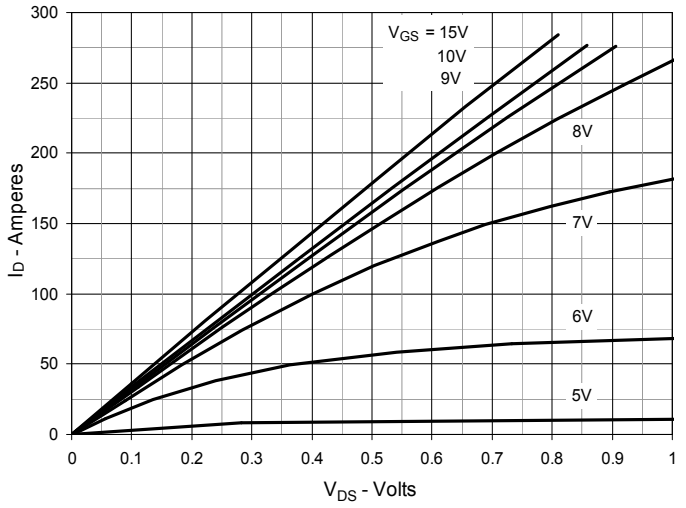


Fig. 4. Normalized $R_{DS(on)}$ to I_D = 135A Value vs. Junction Temperature

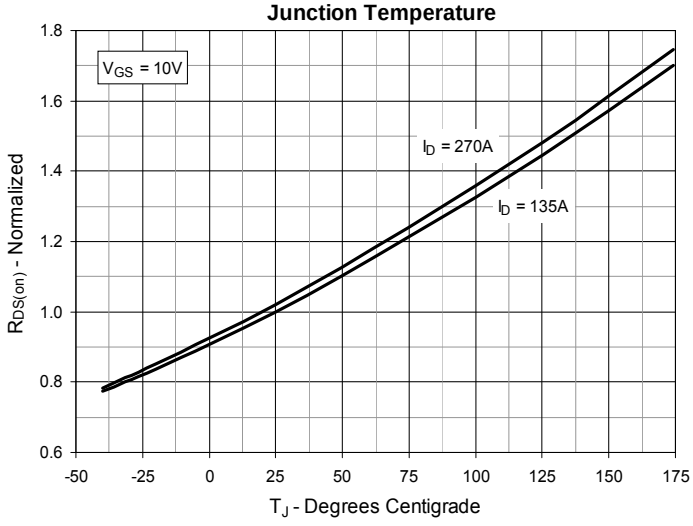


Fig. 5. Normalized $R_{DS(on)}$ to I_D = 135A vs. Drain Current


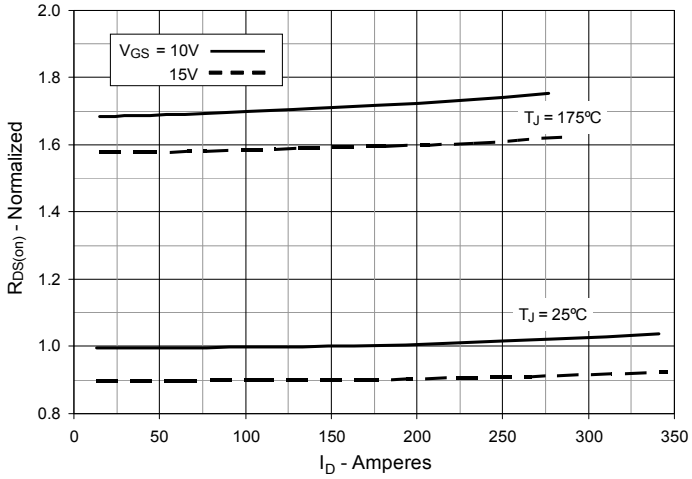


Fig. 6. Drain Current vs. Case Temperature

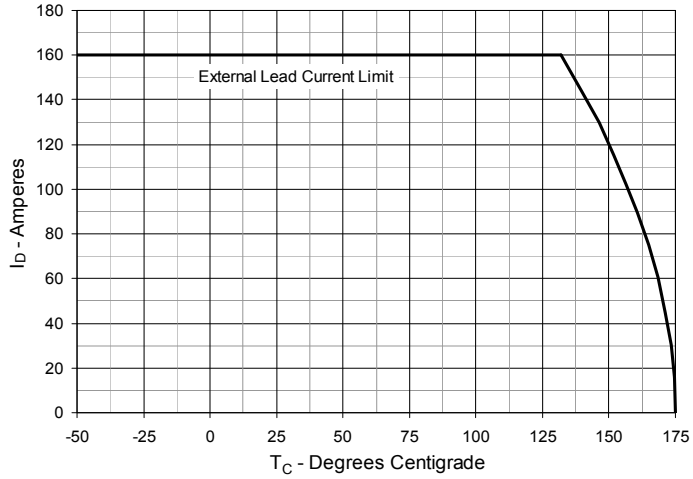

© 2016 IXYS CORPORATION, All Rights Reserved

Fig. 7. Input Admittance

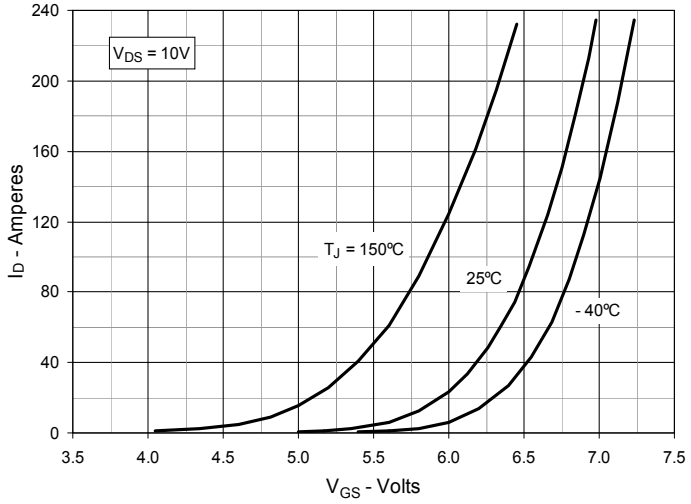


Fig. 8. Transconductance

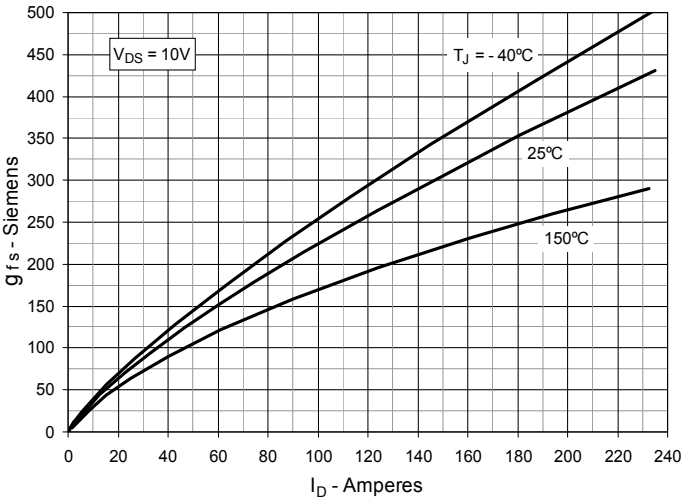


Fig. 9. Forward Voltage Drop of Intrinsic Diode

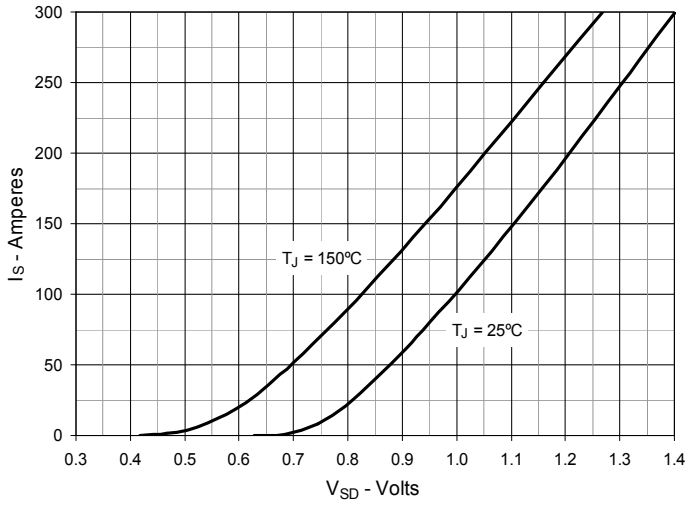


Fig. 10. Gate Charge

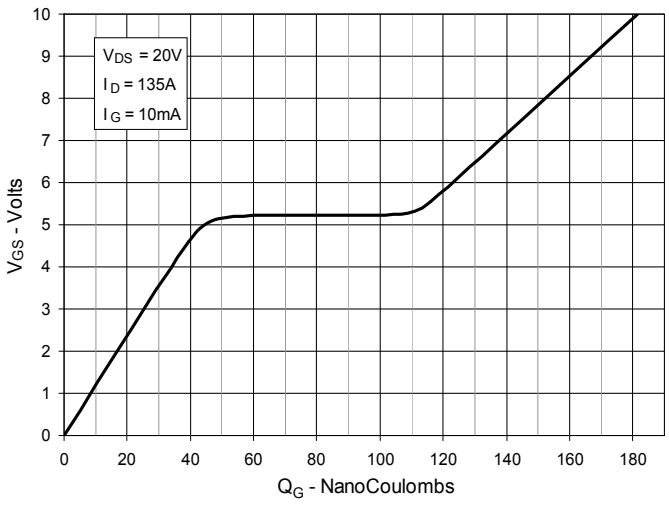


Fig. 11. Capacitance


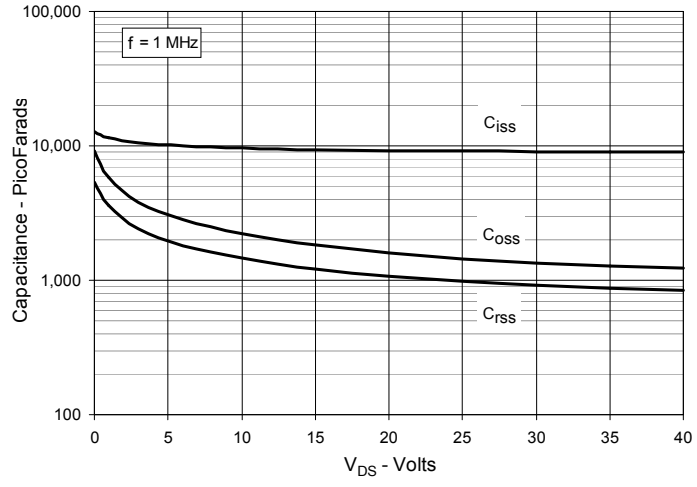


Fig. 12. Forward-Bias Safe Operating Area

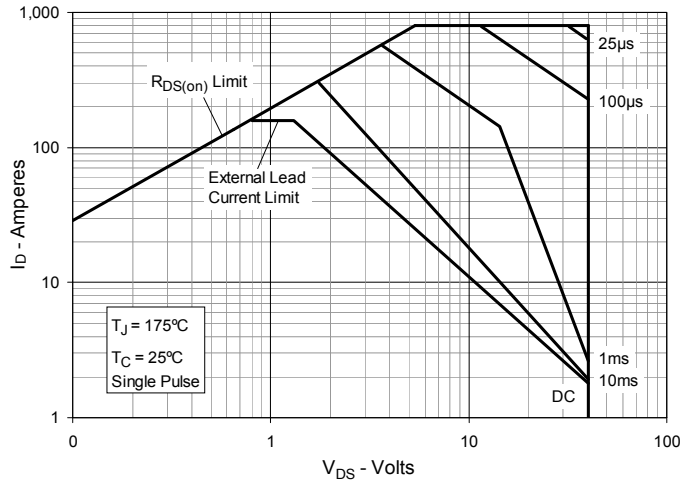

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.

Fig. 13. Resistive Turn-on Rise Time vs. Junction Temperature

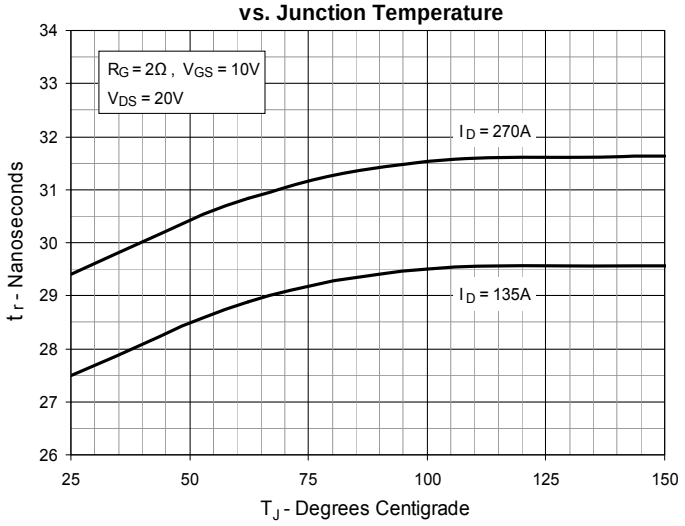


Fig. 14. Resistive Turn-on Rise Time vs. Drain Current

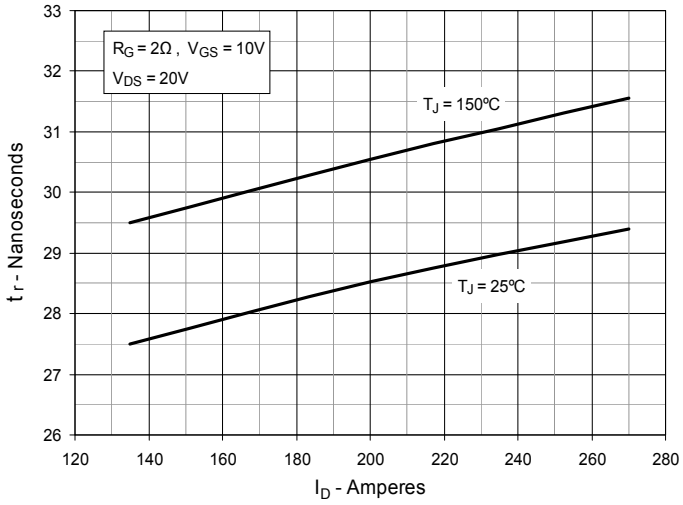


Fig. 15. Resistive Turn-on Switching Times vs. Gate Resistance

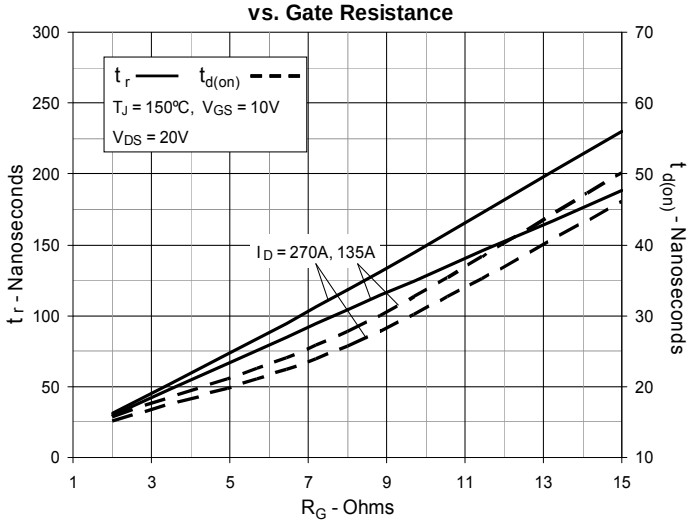


Fig. 16. Resistive Turn-off Switching Times vs. Junction Temperature

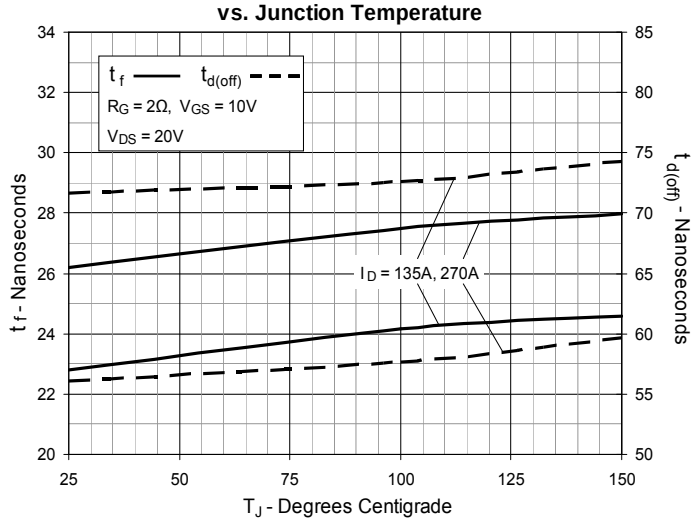


Fig. 17. Resistive Turn-off Switching Times vs. Drain Current



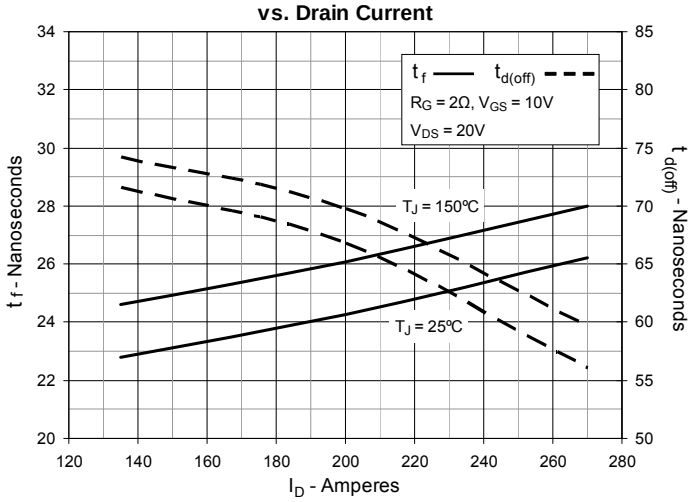


Fig. 18. Resistive Turn-off Switching Times vs. Gate Resistance

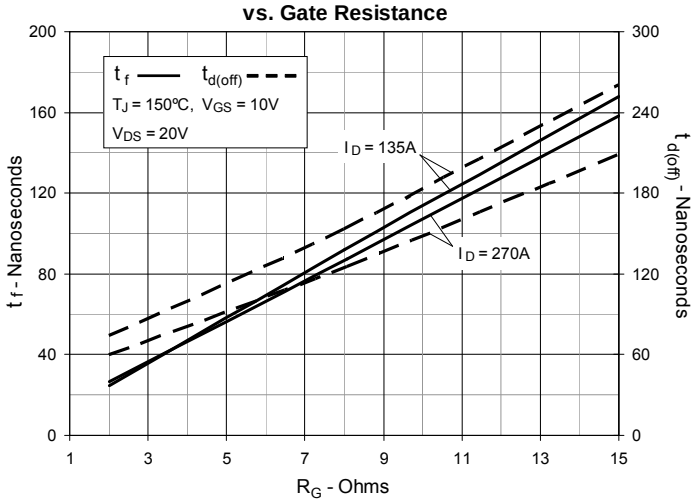


© 2016 IXYS CORPORATION, All Rights Reserved

Fig. 19. Maximum Transient Thermal Impedance

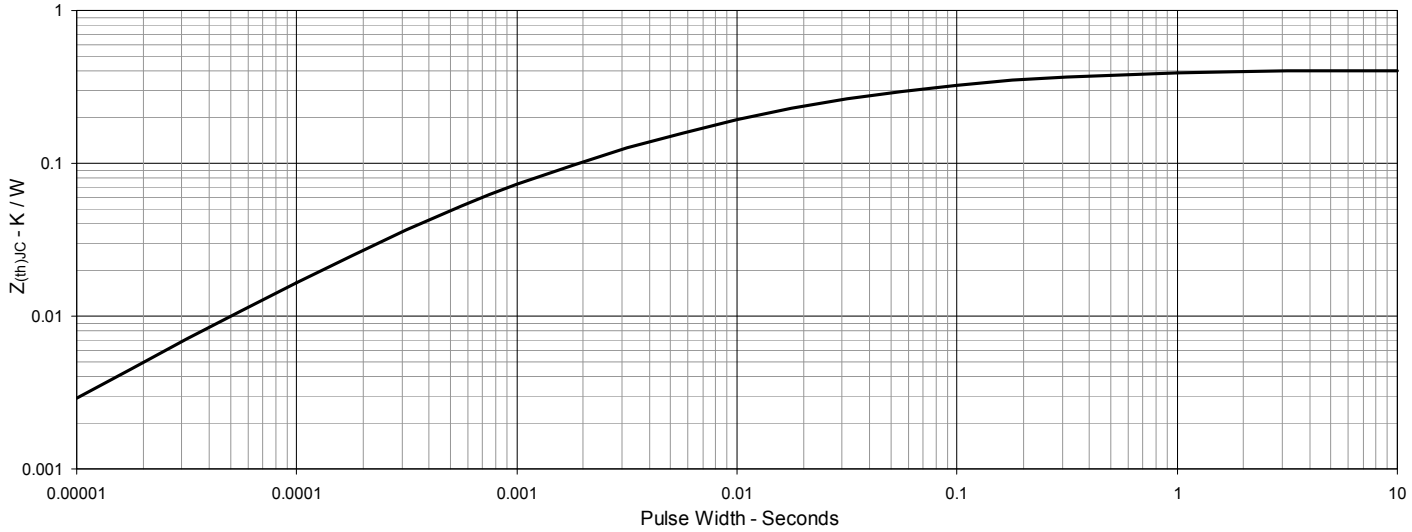


TO-263 (IXTA) Outline

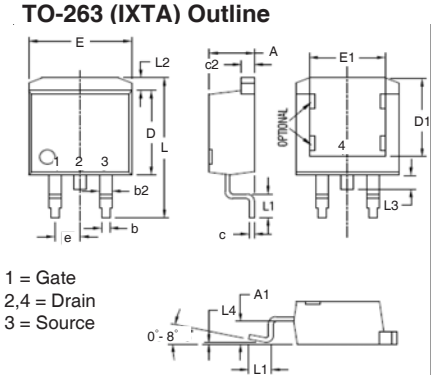

1 = Gate
2,4 = Drain
3 = Source

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.160	.190	4.06	4.83
A1	.080	.110	2.03	2.79
b	.020	.039	0.51	0.99
b2	.045	.055	1.14	1.40
c	.016	.029	0.40	0.74
c2	.045	.055	1.14	1.40
D	.340	.380	8.64	9.65
D1	.315	.350	8.00	8.89
E	.380	.410	9.65	10.41
E1	.245	.320	6.22	8.13
e	.100 BSC		2.54 BSC	
L	.575	.625	14.61	15.88
L1	.090	.110	2.29	2.79
L2	.040	.055	1.02	1.40
L3	.050	.070	1.27	1.78
L4	0	.005	0	0.13

TO-263 (7-lead) (IXTA..7) Outline

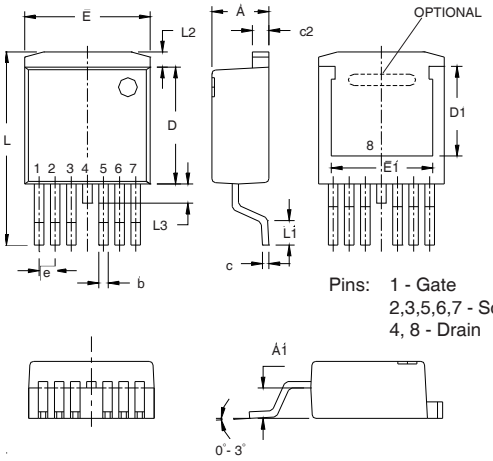

Pins: 1 - Gate
2,3,5,6,7 - Source
4, 8 - Drain

SYM	INCHES		MILLIMETER	
	MIN	MAX	MIN	MAX
A	.170	.185	4.30	4.70
A1	.085	.104	2.15	2.65
b	.026	.035	0.65	0.90
c	.016	.024	0.40	0.60
c2	.049	.055	1.25	1.40
D	.355	.370	9.00	9.40
D1	.272	.280	6.90	7.10
E	.386	.402	9.80	10.20
E1	.311	.319	7.90	8.10
e	.050 BSC		1.27BSC	
L	.591	.614	15.00	15.60
L1	.091	.110	2.30	2.80
L2	.039	.059	1.00	1.50
L3	.000	.059	0.00	1.50

IXYS Reserves the Right to Change Limits, Test Conditions, and Dimensions.



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.