



REVISION HISTORY			
ECO	REV	DESCRIPTION	APP. ENG.
-	1	PRODUCTION	Mike S.

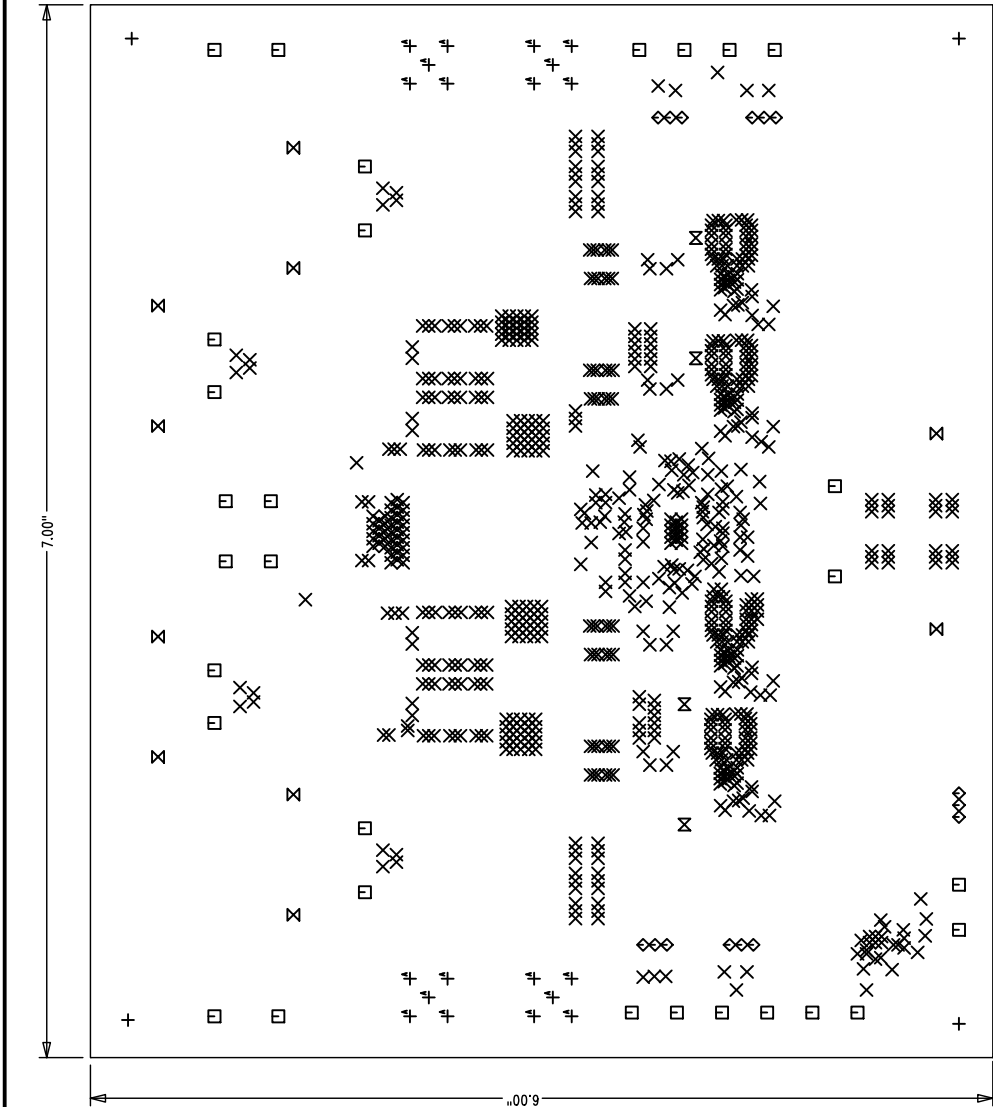


LAYER STRUCTURE



NOTES: UNLESS OTHERWISE SPECIFIED

1. FAB PER IPC-A-600.
2. MATERIAL: -EPOXY FIBERGLASS, NEMA GRADE FR-4
-FINISHED THICKNESS TO BE 0.062" +/- .005"
-TOTAL OF 6 LAYERS WITH 2 OZ. CU ON THE OUTER LAYER AND 1 OZ. CU ON THE INNER LAYERS.
-FLAMMABILITY RATING: 94 V-0 MINIMUM.
3. SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00 ARE PRIMARY DATUMS.
4. DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
-ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
-HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
5. FINISH: -SNOBIC USING LPI BOTH SIDES, COLOR GREEN.
-GOLD IMMERSON BOTH SIDES.
-FOR SILKSCREEN: BOTH SIDES USE WHITE NON-CONDUCTIVE INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. PCBs ARE TO BE RoHS COMPLIANT.
8. SCORING FOR PANELIZED PCB :



SIZE	QTY	SYM	PLATED	TOL
0.187	4	+	YES	+/-0.003
0.01	836	X	YES	+/-0.003
0.095	30	□	YES	+/-0.003
0.035	15	◇	YES	+/-0.003
0.189	10	⊗	YES	+/-0.003
0.06	4	⊗	NO	+/-0.003
0.055	20	⊕	YES	+/-0.003

UNLESS OTHERWISE SPECIFIED		APPROVALS	
DIMENSIONS ARE IN INCHES		PCB DES.	HZ
TOLERANCES:		APP. ENG.	Mike S.
0.XXX = ±0.01		TITLE: FABRICATION DRAWING	
INTERPRET DIM AND TOL PER ASME Y14.5M-1994		HIGH OUTPUT CURRENT 4 PHASE STEP-DOWN CONVERTER	
THRU ANGLE PROJECTION		SIZE	IC NO.
		N/A	LTC7851EUHH
		SCALE = NONE	DEMO CIRCUIT 2380A
		FILENAME: DC2380B1PCB	REV 1
		SHT 1 OF 1	

LINEAR TECHNOLOGY

1350 MCCARTHY BLVD
FARMINGTON, CT 06030
TEL: (860) 432-1900
WWW.LINEAR.COM
FOR CUSTOMER USE ONLY