
IXYS

Polar™ Power MOSFET
HiPerFET™


IXFK140N30P
IXFX140N30P

V_{DSS} = 300V
I_{D25} = 140A
$R_{DS(on)}$ ≤ 24mΩ
t_{rr} ≤ 200ns


N-Channel Enhancement Mode
Avalanche Rated
Fast Intrisic Diode



TO-264 (IXFK)



PLUS247 (IXFX)



G = Gate D = Drain
S = Source TAB = Drain

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	300	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ	300	V
V_{GSS}	Continuous	±20	V
V_{GSM}	Transient	±30	V
I_{D25}	T_C = 25°C	140	A
I_{LRMS}	Lead Current Limit, RMS	75	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}	300	A
I_A	T_C = 25°C	70	A
E_{AS}	T_C = 25°C	5	J
dV/dt	$I_S \le I_{DM}$, $V_{DD} \le V_{DSS}$, $T_J \le 150°C$	20	V/ns
P_D	T_C = 25°C	1040	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	1.6mm (0.062 in.) from case for 10s	300	°C
T_{SOLD}	Plastic body for 10s	260	°C
M_d	Mounting force (PLUS247)	20..120/4.5..27	N/lb.
	Mounting torque (TO-264)	1.13/10	Nm/lb.in.
Weight	PLUS247	6	g
	TO-264	10	g

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 3mA	300			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 8mA	3.0		5.0	V
I_{GSS}	V_{GS} = ±20V, V_{DS} = 0V			±200	nA
I_{DSS}	$V_{DS} = V_{DSS}$			25	μA
	V_{GS} = 0V, T_J = 125°C			1	mA
$R_{DS(on)}$	V_{GS} = 10V, $I_D = 0.5 \bullet I_{D25}$, Note 1		20	24	mΩ

Features

- Fast intrinsic diode
- Avalanche Rated
- Low $R_{DS(ON)}$ and Q_G
- Low package inductance

Advantages

- Easy to mount
- Space savings
- High power density

Applications

- DC-DC coverters
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- AC and DC motor control
- Uninterrupted power supplies
- High speed power switching applications

© 2008 IXYS CORPORATION, All rights reserved


Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = 20V, I_D = 0.5 • I_{D25}, Note 1	50	90		S
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		14.8		nF
C_{oss}			1830		pF
C_{rss}			55		pF
$t_{d(on)}$	**Resistive Switching Times**		30		ns
t_r	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		30		ns
$t_{d(off)}$	R_G = 1Ω (External)		100		ns
t_f			20		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		185		nC
Q_{gs}			72		nC
Q_{gd}			60		nC
R_{thJC}				0.12	°C/W
R_{thCS}			0.15		°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			140	A
I_{SM}	Repetitive, pulse width limited by T_{JM}			560	A
V_{SD}	I_F = 70A, V_{GS} = 0V, Note 1			1.3	V
t_{rr}	I_F = 25A, -di/dt = 100A/μs			200	nS
Q_{RM}	V_R = 100V, V_{GS} = 0V		0.6		μC
I_{RM}			6.0		A

Note 1: Pulse test, t ≤ 300μs; duty cycle, d ≤ 2%.


TO-264 (IXFK) Outline

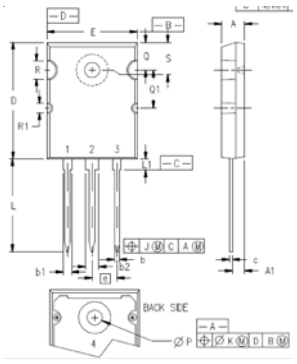

1 – GATE
2, 4 – DRAIN (COLLECTOR)
3 – SOURCE (EMITTER)

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.185	.209	4.70	5.31
A1	.102	.118	2.59	3.00
b	.037	.055	0.94	1.40
b1	.087	.102	2.21	2.59
b2	.110	.126	2.79	3.20
c	.017	.029	0.43	0.74
D	1.007	1.047	25.58	26.59
E	.760	.799	19.30	20.29
e	.215BSC		5.46 BSC	
J	.000	.010	0.00	0.25
K	.000	.010	0.00	0.25
L	.779	.842	19.79	21.39
L1	.087	.102	2.21	2.59
ØP	.122	.138	3.10	3.51
Q	.240	.256	6.10	6.50
Q1	.330	.346	8.38	8.79
ØR	.155	.187	3.94	4.75
ØR1	.085	.093	2.16	2.36
S	.243	.253	6.17	6.43

PLUS 247™ (IXFX) Outline



Terminals: 1 - Gate
2 - Drain (Collector)
3 - Source (Emitter)
4 - Drain (Collector)

Dim.	Millimeter Min.	Millimeter Max.	Inches Min.	Inches Max.
A	4.83	5.21	.190	.205
A_1	2.29	2.54	.090	.100
A_2	1.91	2.16	.075	.085
b	1.14	1.40	.045	.055
b_1	1.91	2.13	.075	.084
b_2	2.92	3.12	.115	.123
C	0.61	0.80	.024	.031
D	20.80	21.34	.819	.840
E	15.75	16.13	.620	.635
e	5.45 BSC		.215 BSC	
L	19.81	20.32	.780	.800
L1	3.81	4.32	.150	.170
Q	5.59	6.20	.220	0.244
R	4.32	4.83	.170	.190

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,850,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ 25ºC

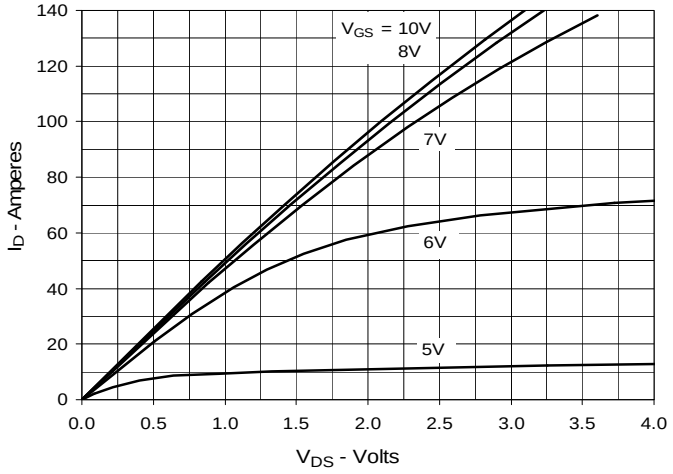


Fig. 2. Extended Output Characteristics @ 25ºC

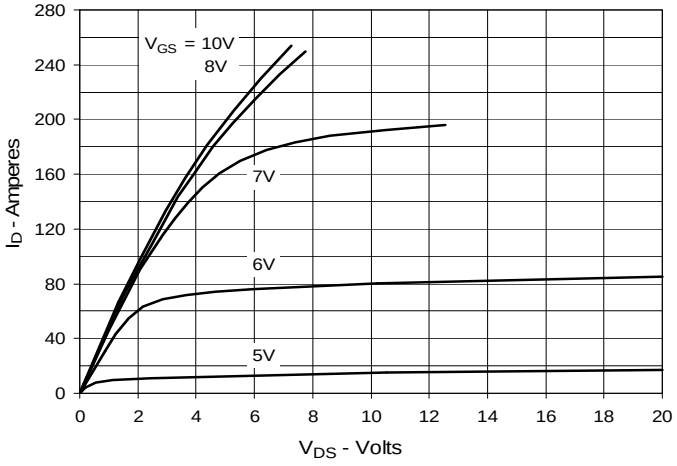


Fig. 3. Output Characteristics @ 125ºC

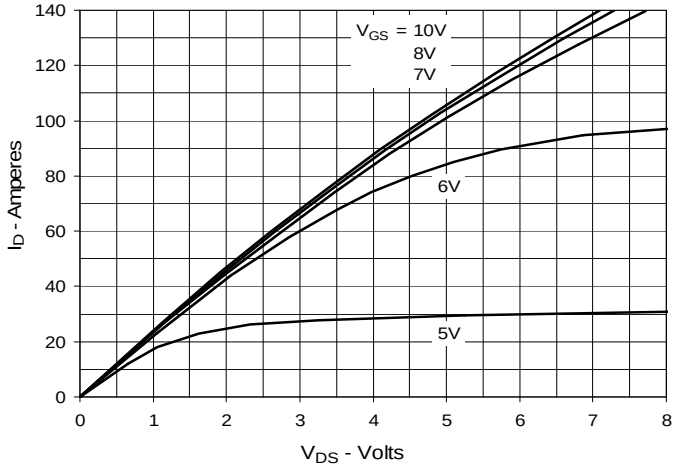


Fig. 4. $R_{DS(on)}$ Normalized to I_D = 70A Value vs. Junction Temperature

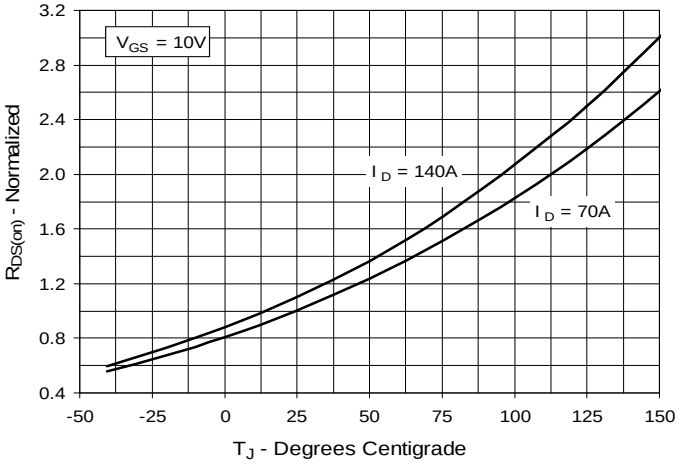


Fig. 5. $R_{DS(on)}$ Normalized to I_D = 70A Value vs. Drain Current


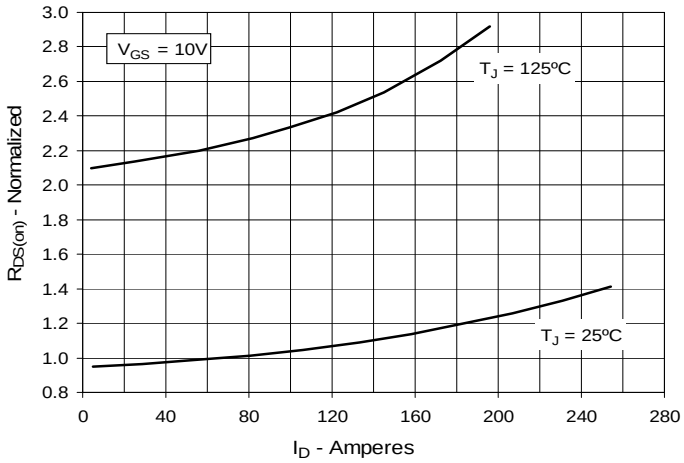


Fig. 6. Maximum Drain Current vs. Case Temperature

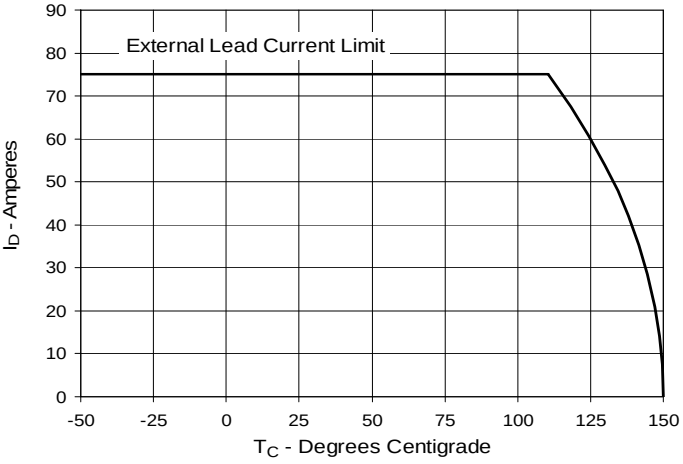

© 2008 IXYS CORPORATION, All rights reserved

Fig. 7. Input Admittance

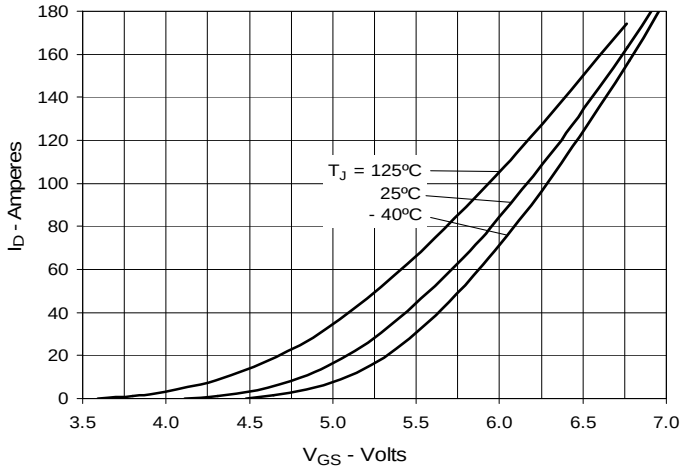


Fig. 8. Transconductance

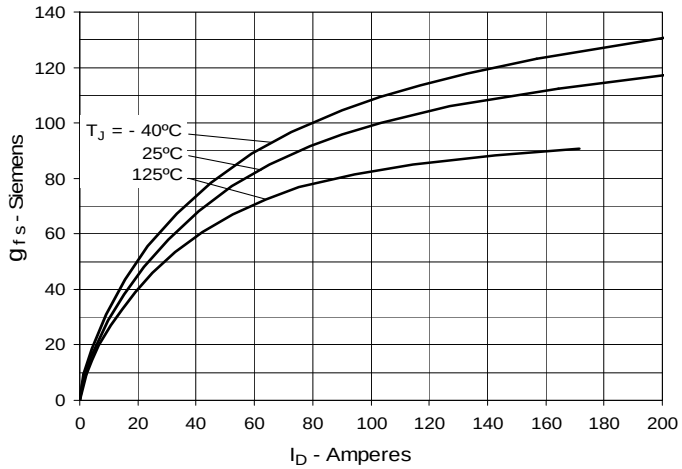


Fig. 9. Forward Voltage Drop of Intrinsic Diode

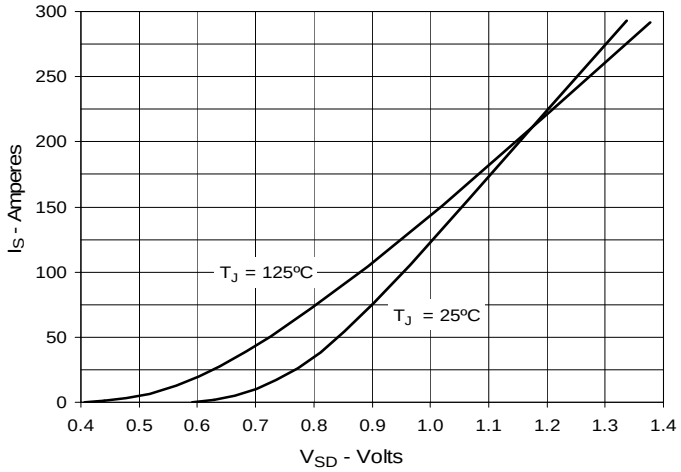


Fig. 10. Gate Charge

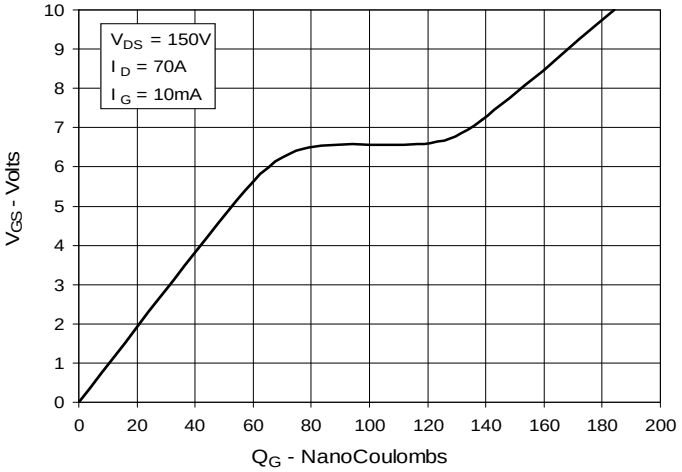


Fig. 11. Capacitance



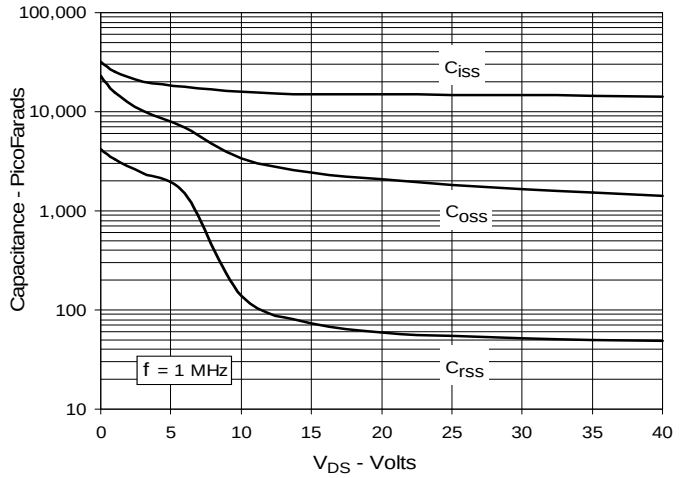


Fig. 12. Forward-Bias Safe Operating Area

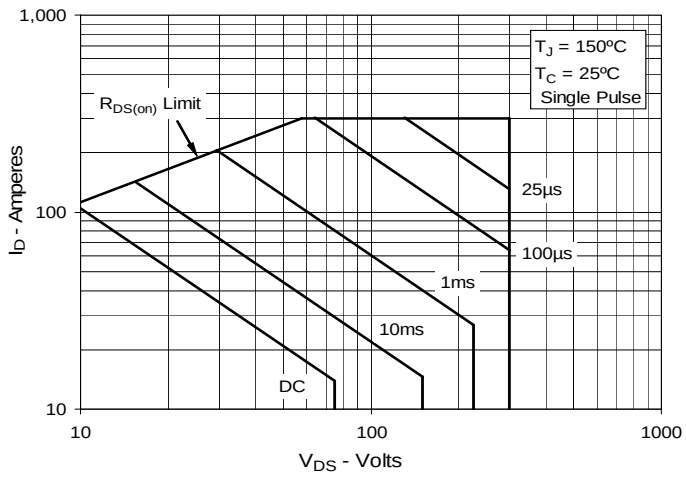

IXYS reserves the right to change limits, test conditions, and dimensions.

Fig. 13. Maximum Transient Thermal Impedance

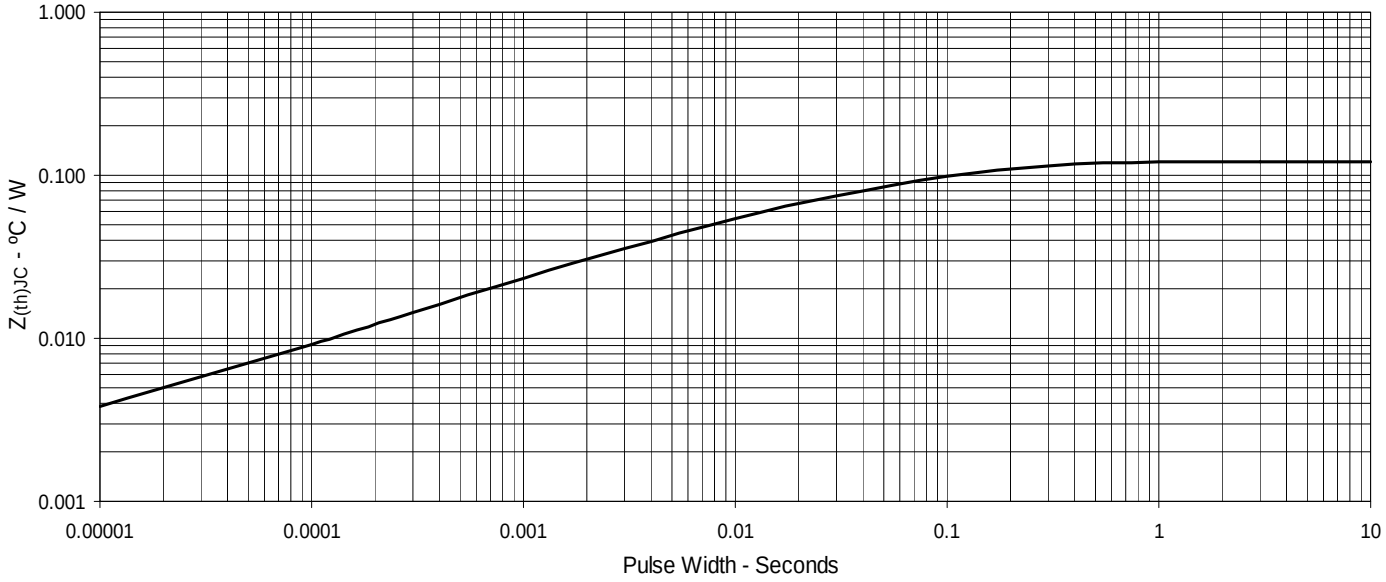

© 2008 IXYS CORPORATION, All rights reserved



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.