


2014A-3.pcb - Fri Aug 23 09:00:28 2013

REVISION HISTORY			
ECO	REV	DESCRIPTION	APP. ENG. DATE
-	3	PRODUCTION	GEORGE Q. 8-18-13

NOTES: UNLESS OTHERWISE SPECIFIED


- 1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610. MAXIMUM SOLDER TEMPERATURE IS 240 DEG C.
- 2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD.
- 3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
- 4. DEPANELIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
- 5. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP TO ANY BOARD.

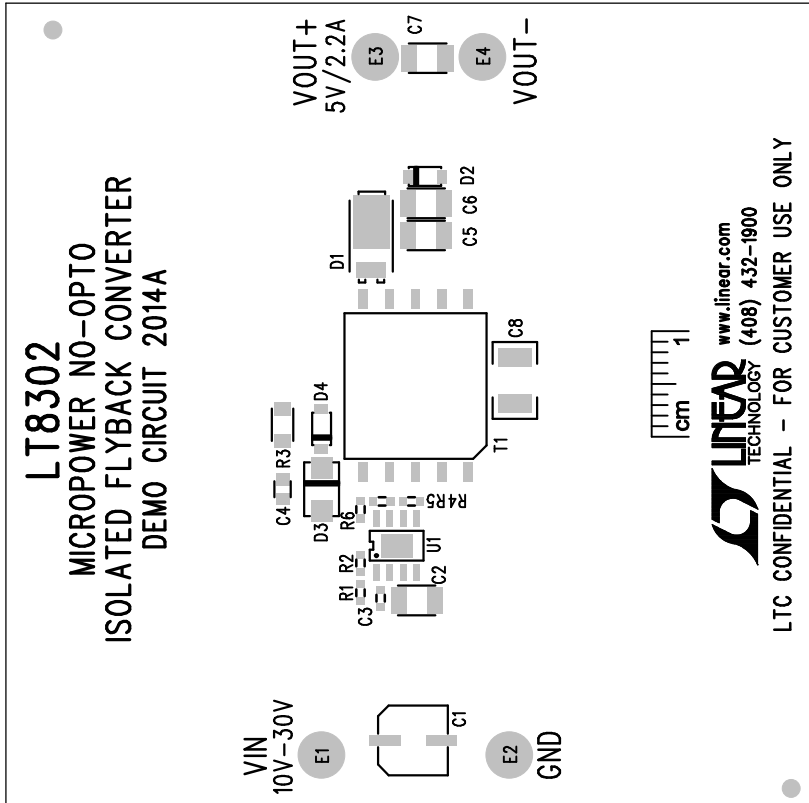

LT8302
MICROPOWER NO-OPTO
ISOLATED FLYBACK CONVERTER
DEMO CIRCUIT 2014A

www.linear.com
(408) 432-1900

LTC CONFIDENTIAL - FOR CUSTOMER USE ONLY

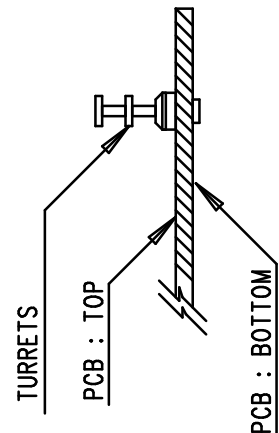

APPROVALS		LINEAR TECHNOLOGY		1630 MCCARTHY BLVD MILPITAS, CA 95035 PH: (408)432-1900 www.linear.com LTC CONFIDENTIAL - FOR CUSTOMER USE ONLY	
PCB DES.	JW	TITLE: TOP ASSEMBLY DRAWING		MICROPOWER NO-OPTO	
APP ENG.	GEORGE Q.	ISOLATED FLYBACK CONVERTER		REV.	
		SIZE		IC NO. LT8302ES8E	
		N/A		DEMO CIRCUIT 2014A	
SCALE = NONE		FILENAME: DC2014A-3.PCB		SHT 1 OF 2	