


REVISIONS			
REV	DESCRIPTION	APPR	DATE
A	PROTOTYPE RELEASE		

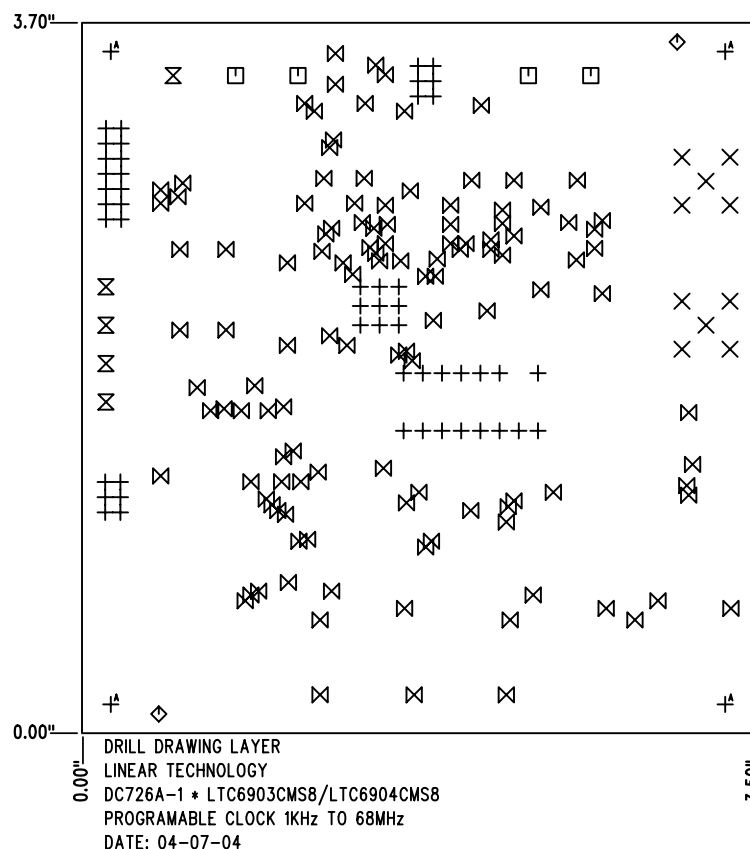


SHOWN FROM COMPONENT SIDE


SIZE	QTY	SYM	PLTD
0.035	50	+	PLTD
0.055	10	X	PLTD
0.094	4	□	PLTD
0.07	2	◇	NPLTD
0.064	5	X	PLTD
0.015	122	X	PLTD
0.19	4	A	PLTD

# NOTES : Unless Otherwise Specified

1. MATERIAL : FR4 OR EQUIVALENT EPOXY, 2 OZ. COPPER CLAD  
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.
2. FINISH : ALL PLATED HOLES .001 MIN. / .0015 MAX. COPPER PLATE  
ELECTRODEPOSITED TIN-LEAD COMPOSITION  
BEFORE REFLOW , SOLDER MASK OVER BARE COPPER (SMOBC).
3. SOLDER MASK : BOTH SIDES USING LPI OR EQUIVALENT.
4. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
5. SCORING:



6. PLEASE LOOK AT THE README FILE FOR THE OTHER REQUIREMENTS.

APPROVALS			 <div>           1630 McCarthy Blvd.            Milpitas, CA 95035            PH: (408)432-1900         </div>	
	INIT	DATE		
DRAWN			TITLE: FABRICATION DRAWING <b>PROGRAMABLE CLOCK 1KHz TO 68MHz</b>	
CHECK				
DESIGN	KIM T.	04-07-04		
ENGR	PHILIP K.	04-07-04		
			SIZE	REV.
			A	A
SCALE = NONE			DES- 0000	SHT 1 of 1