



REVISION HISTORY			
ECO	REV	DESCRIPTION	APPR
	2	PRODUCTION	Goran P.
			DATE
			10-16-13

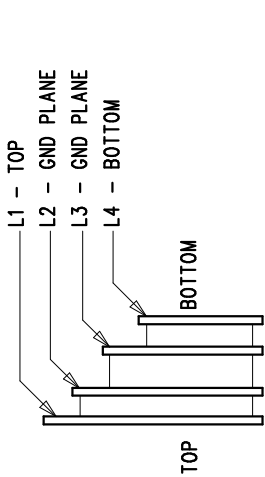

NOTES: UNLESS OTHERWISE SPECIFIED

- 1. FAB PER IPC-A-600.
- 2. MATERIAL: -EPOXY FIBERGLASS, NEMA GRADE FR-4
 - FINISHED THICKNESS TO BE 0.062" +/- .005"
 - TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE OUTER LAYERS AND 1 OZ. CU ON THE INNER LAYERS.
 - FLAMMABILITY RATING: 94 V-0 MINIMUM.
- 3. SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00" ARE PRIMARY DATUMS.
- 4. DRILLING: -DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, 0.001" THICK MIN.
 - ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
 - HOLE LOCATION TOLERANCES ARE +/-0.003" IN RELATION TO CENTER
- 5. FINISH: -SMOBC USING LPI BOTH SIDES, COLOR GREEN.
 - GOLD IMMERSION BOTH SIDES.
 - FOR SILKSCREENS: USE WHITE NON-CONDUCTIVE INK.
- 6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
- 7. PCBs ARE TO BE RoHS COMPLIANT.
- 8. SCORING FOR PANELIZED PCB:



UNLESS OTHERWISE SPECIFIED

DIMENSIONS ARE IN INCHES

TOLERANCES:

0.XX" = ±0.01"

0.XXX" = ±0.005"

INTERPRET DIM AND TOL PER ASME Y14.5M-1994

THIRD ANGLE PROJECTION

APPROVALS

PCB DES.	HZ
APP ENG.	Goran P.
TITLE: FABRICATION DRAWING	
BUCK-BOOST SUPERCAPACITOR CHARGER AND BALANCER	
SIZE	IC NO.
N/A	LTC3128EUF
REV	
2	
SCALE = NONE	
FILENAME: DC188A-2.PCB	
SHT 1 OF 1	

1630 MCCARTHY BLVD
MILFORD, MA 01801
TEL: 978-675-1000
WWW.LTC.COM
LTC CONFIDENTIAL -
FOR CUSTOMER USE ONLY

SIZE	QTY	SYM	PLATED	TOL
0.187	4	+	YES	+/-0.003
0.07	2	◇	NO	+/-0.003
0.095	10	⊗	YES	+/-0.003
0.035	3	⊗	YES	+/-0.003
0.03543	12	⊗ ^A	YES	+/-0.003
0.012	102	⊗ ^B	YES	+/-0.003
0.03937	4	⊗ ^C	YES	+/-0.003