

TCA9548AEVM

This document is the user's guide for the TCA9548AEVM. The TCA9548AEVM is designed to evaluate and demonstrate the functionality of TI's TCA954xA family of I²C switches. The TCA9548A comes installed on the board and the 24-pin TSSOP footprint also supports TCA9543A, TCA9544A, TCA9545A, and TCA9546A.

Contents

1	About this Manual.....	2
2	Information About Cautions and Warnings	2
3	Items Required for Operation	2
4	Introduction	2
5	Setup	3
5.1	Header and Jumper Connections Description	3
6	Schematic	10
6.1	Pin Map.....	11
7	Board Layout.....	11
8	Bill of Materials	13

List of Figures

1	TCA9548AEVM	3
2	J_1V8 Jumper Connecting LDO Output	4
3	J8 Jumper SDA and SCL Pull Up Voltage Selection	4
4	J_Vcct1 and J_Vcct2 Jumper Connections	5
5	A0 and A1 Slave Address Configuration	5
6	Grounding Configurations for Other TCA954xA Devices	6
7	J7 and J11 Jumper Connections	6
8	Jumper Configuration for TCA9548A	7
9	Jumper Configuration for TCA9546A	7
10	Jumper Configuration for TCA9545A	8
11	Jumper Configuration for TCA9544A	8
12	Jumper Configuration for TCA9543A	9
13	TCA9548AEVM Schematic	10
14	PCB Layer 1 (Top Layer).....	11
15	PCB Layer 2 (Bottom Layer).....	12


List of Tables

1	Device and Package Configurations	2
2	TCA954xA Pin Map	11
3	Bill of Materials	13

1 About this Manual

This user's guide describes the TCA9548AEVM. This guide contains an introduction, setup instructions, the EVM schematic, top and bottom board layouts, and a bill of materials.

2 Information About Cautions and Warnings

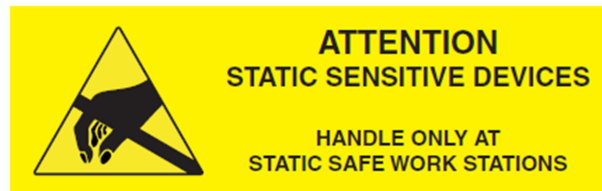

CAUTION

This EVM contains components that can potentially be damaged by electrostatic discharge. Always transport and store the EVM in its supplied ESD bag when not in use. Handle using an antistatic wristband. Operate on an antistatic work surface. For more information on proper handling, see the *Electrostatic Discharge (ESD)* application note ([SSYA008](#))

The information in a caution or a warning is provided for your protection. Read each caution and warning carefully.

3 Items Required for Operation

The following items are required to use the TCA9548AEVM:

- TCA9548AEVM
- Power supply 1.8 V–5 V 500 mA
- I²C master controller

4 Introduction

This document is the user's guide for the TCA9548AEVM. The TCA9548AEVM is designed to evaluate and demonstrate the functionality of TI's TCA954xA family of I2C switches. The TCA9548AEVM can be used as a standalone evaluation module to interface with an existing system or paired with the MSP430 Launchpad which serves as the I2C master and power supply for the TCA9548AEVM. The TCA9548AEVM also has several jumpers that can be adjusted to accommodate 5 different Texas Instruments I2C switches with varying numbers of channels: TCA9543A, TCA9544A, TCA9545A, TCA9546A, and TCA9548A. Other devices in the TCA954xA family with fewer channels can be ordered separately and placed on the TCA9548AEVM for evaluation.

Table 1. Device and Package Configurations

I2C SWITCH	IC	PACKAGE
U1	TCA9543APWR	TSSOP-14
U2	TCA9544APWR	TSSOP-20
U3	TCA9545APWR	TSSOP-20
U4	TCA9546APWR	TSSOP-16
U5	TCA9548APWR	TSSOP-24

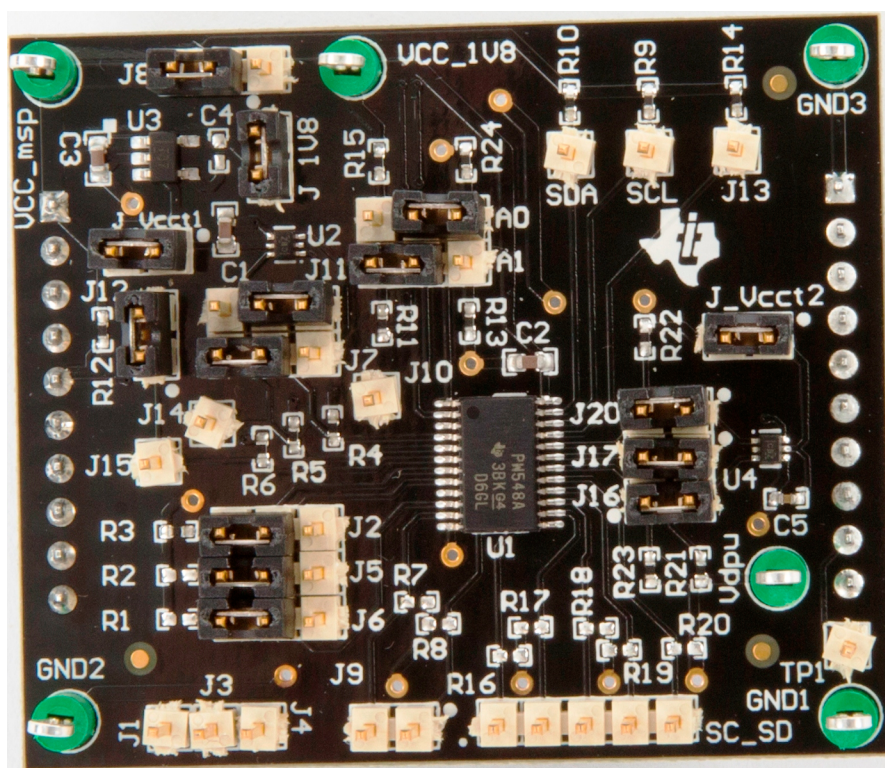


Figure 1. TCA9548AEVM

5 Setup

This section describes the header/jumper connections on the EVM, installation of the firmware on the MSP430 LaunchPad, and getting started using the TCA9548AEVM with other TCA954xA supported devices.

5.1 Header and Jumper Connections Description

5.1.1 J1 and J2: MSP430 LaunchPad interface

Headers J1 and J2 allow the EVM to interface with the MSP430 LaunchPad

5.1.2 J_1V8: LDO output

Jumper J_1V8 shorts the output of the LDO to Vcc 1V8 which powers the TCA954xA IC and the pull up voltage for the ICs address pins. The J_1V8 jumper allows the user to remove the LDO from the circuit and supply external power to the TCA954xA device and address pins. External power to the TCA954xA device must be between 1.8V-5V. [Figure 2](#) shows the J_1V8 jumper installed connecting the LDO output to the TCA954xA supply.

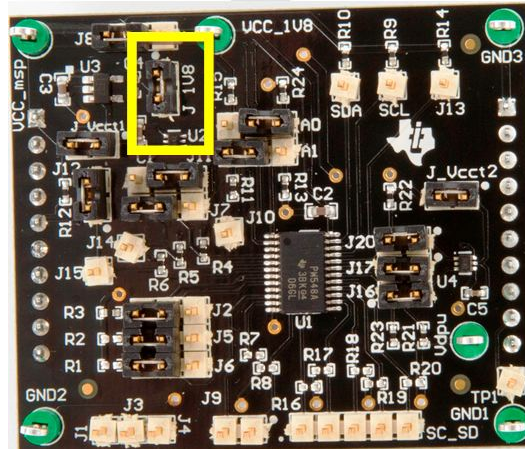


Figure 2. J_1V8 Jumper Connecting LDO Output

5.1.3 J8: SDA and SCL Pull Up Voltage Selection

J8 allows the user to select the voltage for all of the slave signal path pull ups. J8 can select the slave signal lines pulled up to VCC_1V8 voltage which is the same as the TCA954xA IC voltage or select the slave signal lines pulled up to VCC_msp voltage which is the same as the master side pull up voltage. This gives the user the flexibility to operate the master and slave signals with different pull up voltages showing the TCA954xA devices' level translation ability. [Figure 3](#) shows the J8 jumper selecting the slave signals' pull up voltage the same as VCC_msp.

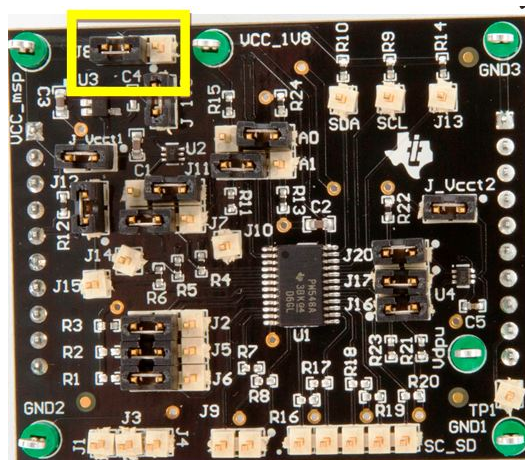


Figure 3. J8 Jumper SDA and SCL Pull Up Voltage Selection

5.1.4 J_Vcct1 and J_Vcct2: Temp Sensor Power Supply

J_Vcct1 and J_Vcct2 allow the user to disconnect the Vdpu power supply to the two TMP102 temperature sensors. Figure 4 shows J_Vcct1 and J_Vcct2 jumpers installed connecting power to the TMP102 temperature sensors.

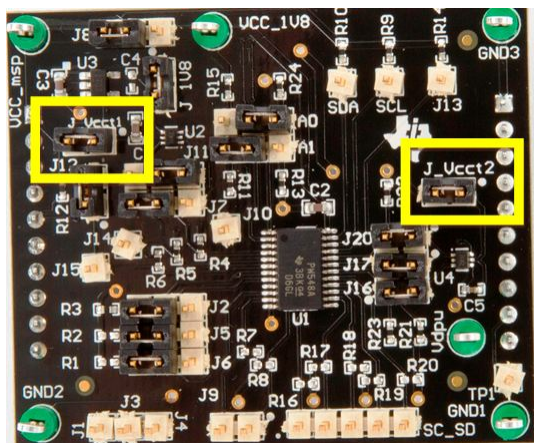


Figure 4. J_Vcct1 and J_Vcct2 Jumper Connections

5.1.5 A0 and A1: Slave Address Configuration

Jumpers A0 and A1 allow the user to configure the TCA954xA IC slave address both through hardware and software. The jumpers connect the A0 and A1 address pins of the TCA954xA either to VCC_1V8 or ground. If the jumpers are removed the user can configure the A0 and A1 pins through software. Figure 5 shows A0 connected to ground and A1 connected to VCC_1V8.

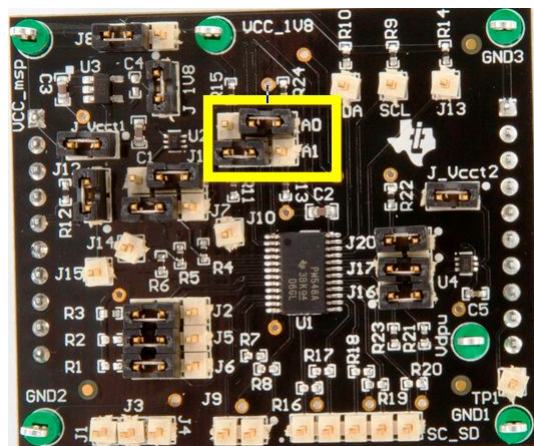


Figure 5. A0 and A1 Slave Address Configuration

NOTE: The A2 address pin for the TCA954xA devices are pulled up to VCC_msp on the board and does not offer hardware configurability.

5.1.6 J2, J5, and J6: IC Grounding Configurations for Other TCA954xA Devices

J2, J5, and J6 provide alternate grounds if the user decides to install other TCA954xA devices on the TCA9548AEVM. J2, J5, and J6 jumpers either ground the pin from the IC or pulls it up to V_{dpu} for signal path communication. While the TCA9548A IC is installed, in order to use the signal paths, all three jumpers must be placed pulling up the IC pins to V_{dpu} as shown in [Figure 6](#).

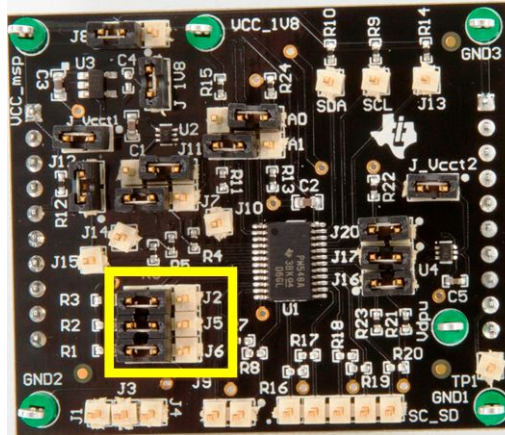


Figure 6. Grounding Configurations for Other TCA954xA Devices

5.1.7 J1, J3, J4, J9, J10, J13, J14, J15, SDA, SCL, SC_SD: IC Signal Path Headers

J1, J3, and J4 are headers for signal pins when jumpers J2, J5, and J6 are not configured to ground one of the TCA954xA devices. [Figure 6](#) shows J2, J5, and J6 configured for the TCA9548A which make J1, J3, J4, J9, J10, J13, J14, J15, SDA, SCL, SC_SD headers for signal paths

J10, J13, SDA, SCL are headers for signal paths on the master side of the TCA954xA.

J9, J14, J15, and SC_SD are headers for signal paths on the slave side of the TCA954xA.

5.1.8 J7, J11, J12, J16, J17, J20: IC Signal Path Configurations for TCA954xA Devices

J7 and J11 are jumpers that configure the TCA9548AEVM to accommodate the various signal paths for the TCA954xA devices to the TMP102 temperature sensor. [Table 1](#) shows the pinouts of the TCA954xA family. [Figure 7](#) shows J7 and J11 configured to communicate to the two temperature sensors from the TCA9548A.

J12, J16, J17, J20 jumpers allow the user to disconnect the Temperature sensor from the TCA954xA device and use the I2C channel for their system

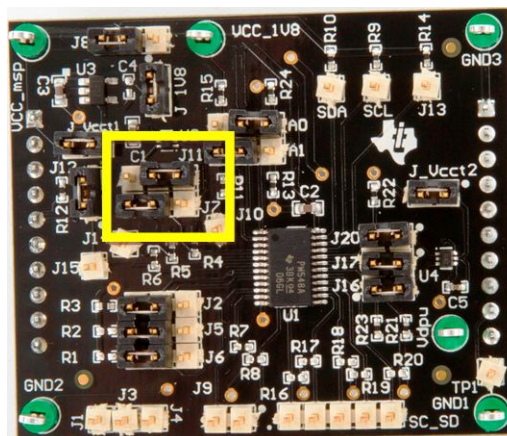


Figure 7. J7 and J11 Jumper Connections

5.1.9 Replacing TCA9548A with Another TCA954xA

When replacing the TCA9548A device, make sure you solder pin 1 of the TCA954xA device in the upper left hand corner of the pad. When this is done correctly, there will be unused pads below the IC. Before powering on the device ensure the jumpers are set according to the configurations shown in [Figure 8](#) through [Figure 12](#):

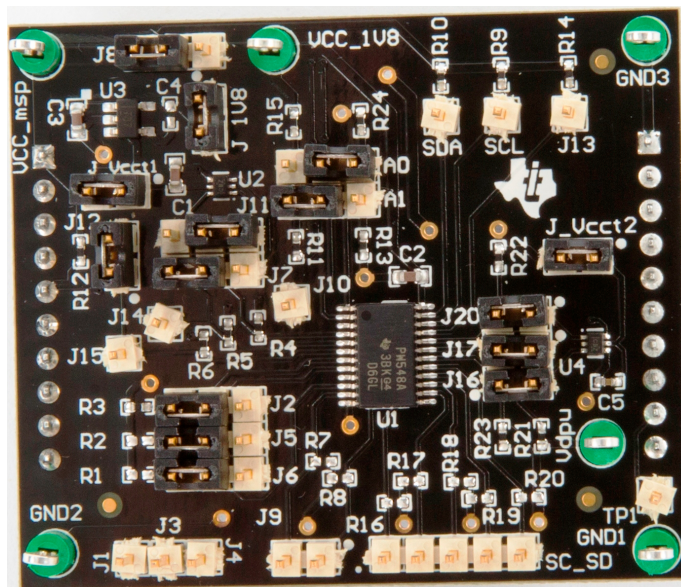


Figure 8. Jumper Configuration for TCA9548A

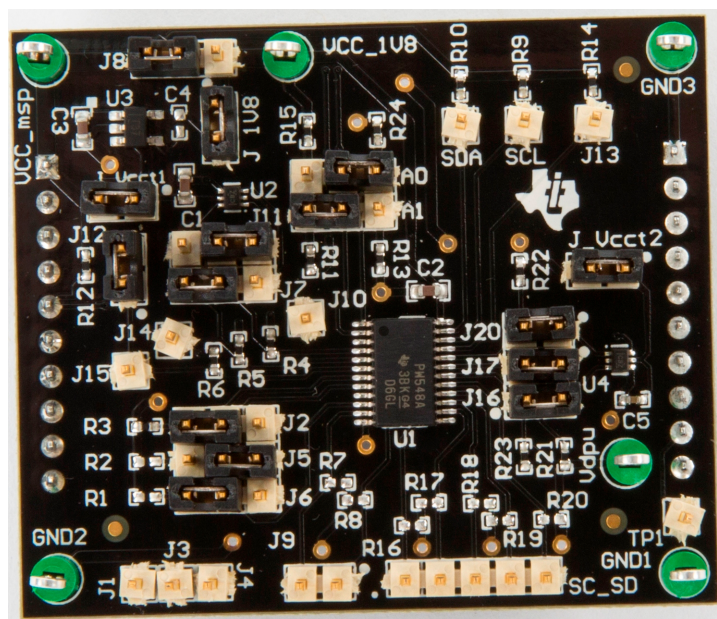


Figure 9. Jumper Configuration for TCA9546A

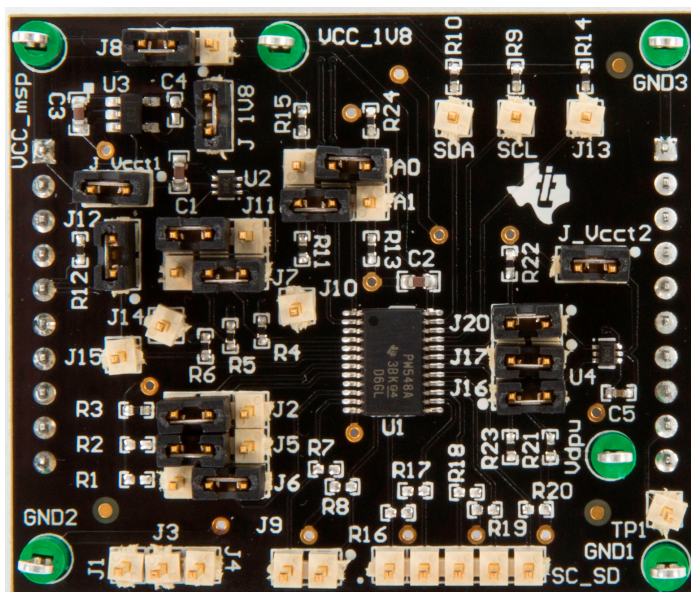


Figure 10. Jumper Configuration for TCA9545A

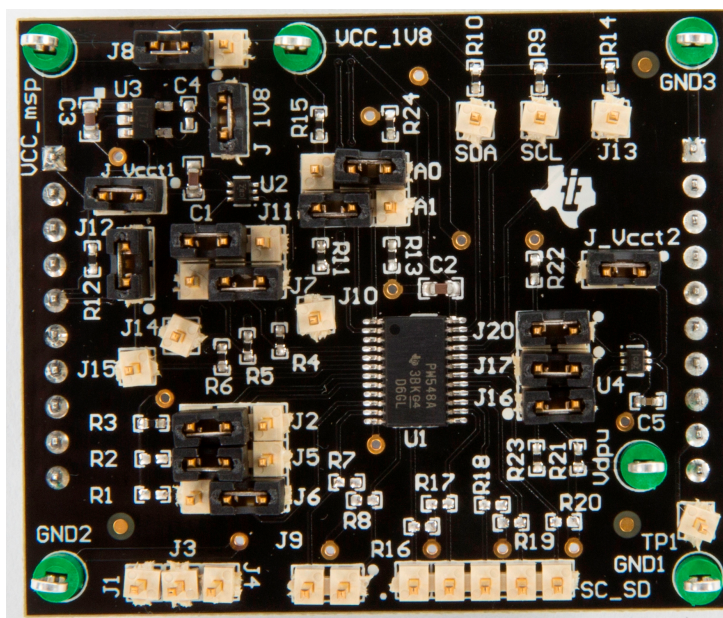


Figure 11. Jumper Configuration for TCA9544A



6 Schematic

Figure 13 shows the schematic for the TCA9548AEVM evaluation board. PDFs are available on www.ti.com.

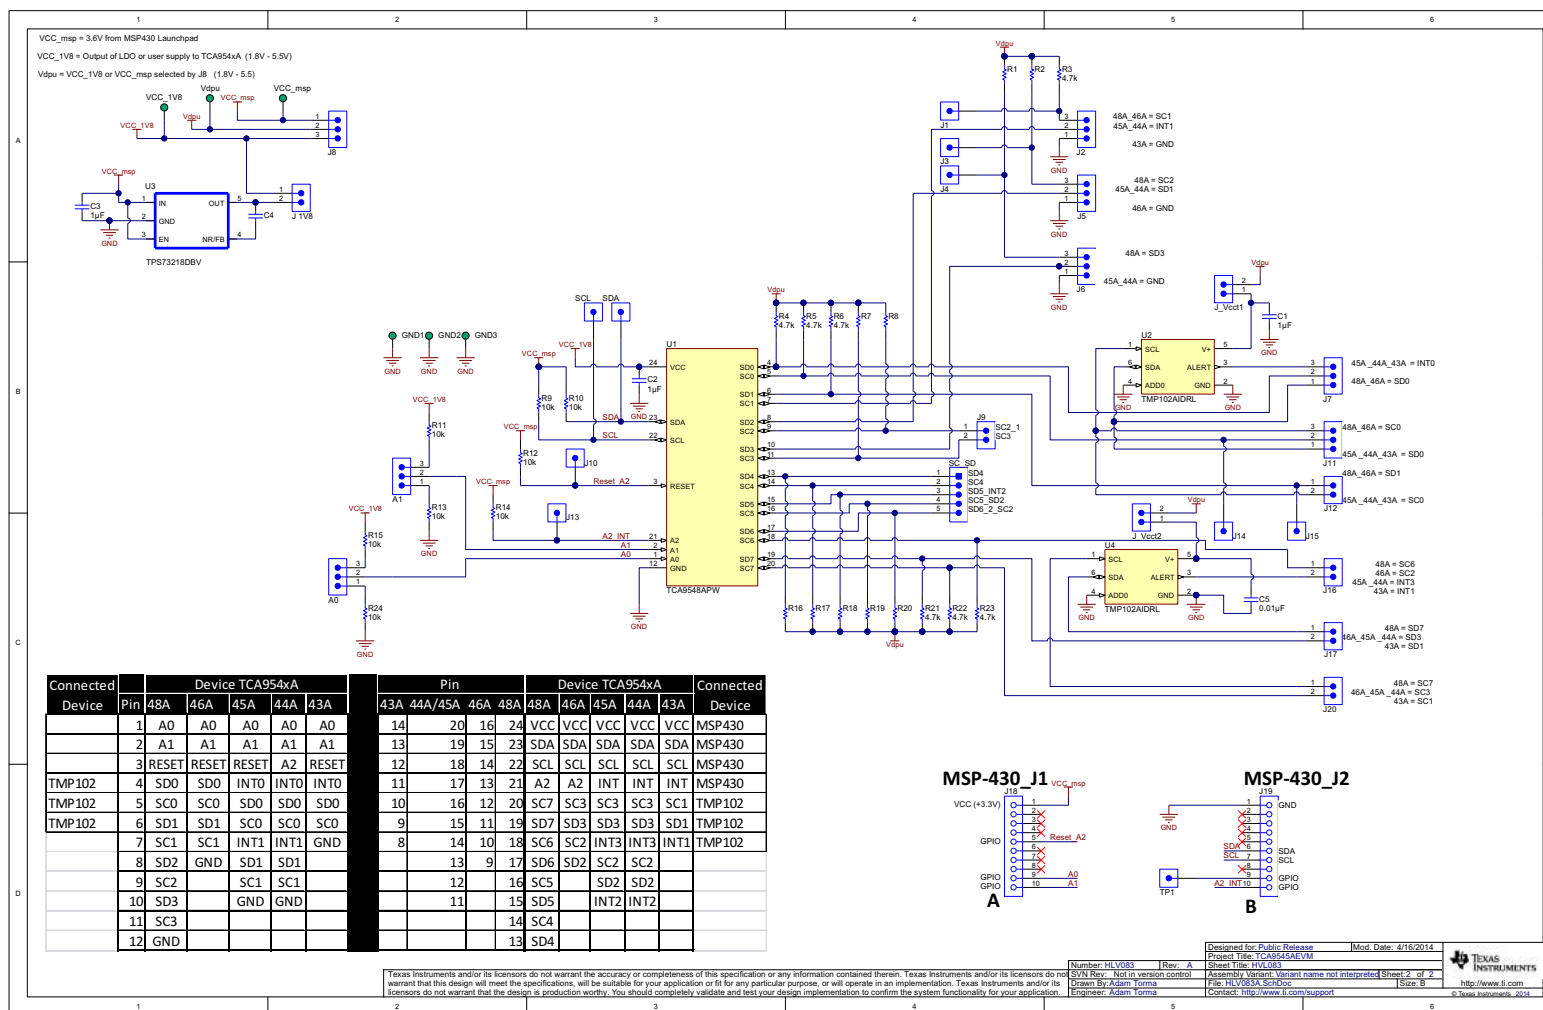


Figure 13. TCA9548AEVM Schematic

6.1 Pin Map

Table 2 shows the TCA954xA pin map.

Table 2. TCA954xA Pin Map

Connected Device	Pin	Device TCA954xA						Pin				Device TCA954xA					Connected Device
		48A	46A	45A	44A	43A		43A	44A/45A	46A	48A	48A	46A	45A	44A	43A	
	1	A0	A0	A0	A0	A0		14	20	16	24	VCC	VCC	VCC	VCC	VCC	MSP430
	2	A1	A1	A1	A1	A1		13	19	15	23	SDA	SDA	SDA	SDA	SDA	MSP430
	3	RESET	RESET	RESET	A2	RESET		12	18	14	22	SCL	SCL	SCL	SCL	SCL	MSP430
TMP102	4	SD0	SD0	INT0	INT0	INT0		11	17	13	21	A2	A2	INT	INT	INT	MSP430
TMP102	5	SC0	SC0	SD0	SD0	SD0		10	16	12	20	SC7	SC3	SC3	SC3	SC1	TMP102
TMP102	6	SD1	SD1	SC0	SC0	SC0		9	15	11	19	SD7	SD3	SD3	SD3	SD1	TMP102
	7	SC1	SC1	INT1	INT1	GND		8	14	10	18	SC6	SC2	INT3	INT3	INT1	TMP102
	8	SD2	GND	SD1	SD1				13	9	17	SD6	SD2	SC2	SC2		
	9	SC2		SC1	SC1				12		16	SC5		SD2	SD2		
	10	SD3		GND	GND				11		15	SD5		INT2	INT2		
	11	SC3									14	SC4					
	12	GND									13	SD4					

7 Board Layout

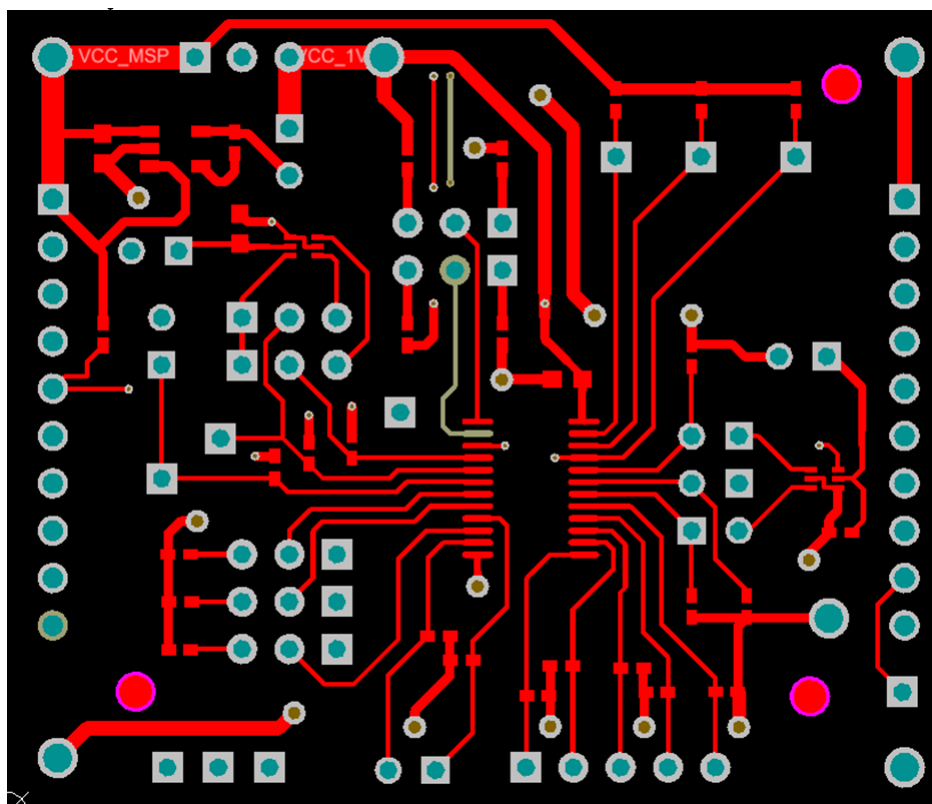


Figure 14. PCB Layer 1 (Top Layer)

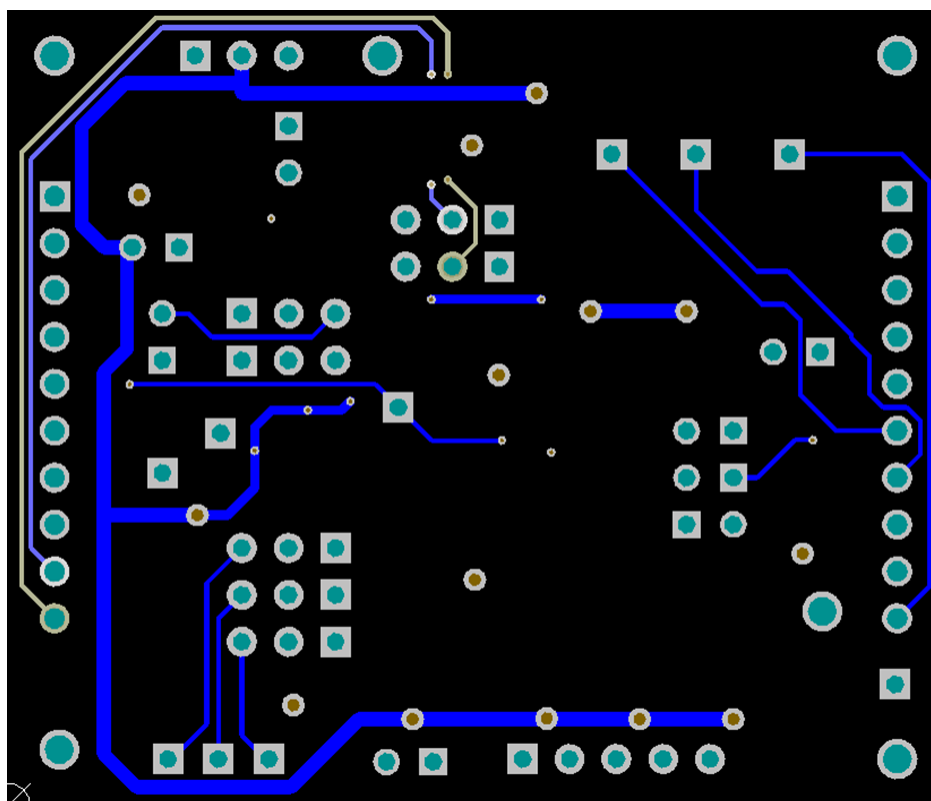


Figure 15. PCB Layer 2 (Bottom Layer)

8 Bill of Materials

Table 3 lists the BOM.

Table 3. Bill of Materials

Designator	Qty.	Value	Description	Package Reference	Part Number	Manufacturer
PCB	1		Printed Circuit Board		TCA954xA	Any
A0, A1, J3, J7, J9, J11, J13, J14	8	1x3	Header, TH, 100mil, 1x3, Gold plated, 230 mil above insulator	PBC03SAAN	PBC03SAAN	Sullins Connector Solutions
C1, C3, C4	3	1μF	CAP, CERM, 1μF, 16V, ±10%, X7R, 0603	603	C1608X7R1C105K	TDK
C2, C5	2	0.01μF	CAP, CERM, 0.01μF, 25V, ±10%, X7R, 0402	402	C1005X7R1E103K	TDK
GND1–GND3, VCC_1V8, VCC_msp, Vdpu	6	Green	Test Point, Multipurpose, Green, TH	Green Multipurpose Testpoint	5126	Keystone
J1, J2	2		Connector, Receptacle, 100mil, 10x1, Gold plated, TH	HEADER, RECEPTACLE, 100mil, 10x1	SSW-110-23-F-S	Samtec, Inc.
J1V8, J12, J16, J18, J19, J20, Vcct1, Vcct2	8		Header, 100mil, 2x1, Tin plated, TH	Header, 2 PIN, 100mil, Tin	PEC02SAAN	Sullins Connector Solutions
J4, J5, J6, J8, J10, J15, J17, SCL, SDA, TP	10		Header, TH, 100mil, 1pos, Gold plated, 230 mil above insulator	Testpoint	TSW-101-07-G-S	Samtec, Inc.
LBL1	1		Thermal Transfer Printable Labels, 0.650" W x 0.200" H - 10,000 per roll	PCB Label 0.650"H x 0.200"W	THT-14-423-10	Brady
R1–R8	8	10k	RES, 10kΩ, 5%, 0.063W, 0402	402	CRCW040210K0JNED	Vishay-Dale
R9–R11, R16, R22–R24	7	4.7k	RES, 4.7kΩ, 5%, 0.063W, 0402	402	CRCW04024K70JNED	Vishay-Dale
SC_SD	1		Header, TH, 100mil, 5x1, Gold plated, 230 mil above insulator	5x1 Header	TSW-105-07-G-S	Samtec
SH-J1–SH-J16	16	1x2	Shunt, 100mil, Gold plated, Black	Shunt	969102-0000-DA	3M
U1	1		LOW VOLTAGE 8-CHANNEL I2C SWITCH WITH RESET, PW0024A	PW0024A	TCA9548APW	Texas Instruments
U2, U3	2		Low Power Digital Temperature Sensor With SMBus/Two-Wire Serial Interface in SOT563, DRL0006A	DRL0006A	TMP102AIDRL	Texas Instruments
U4	1	TPS732xxDBV	IC, Cap-Free NMOS 250-mA LDO Regulator With Reverse-Current Protection	SOT23-5	TPS732xxDBV	TI
FID1, FID2, FID3	0		Fiducial mark. There is nothing to buy or mount.	Fiducial	N/A	N/A
R12–R15, R17–R21	0		RES, 1.0kΩ, 5%, 0.063W, 0402	402	CRCW04021K00JNED	Vishay-Dale

ADDITIONAL TERMS AND CONDITIONS, WARNINGS, RESTRICTIONS, AND DISCLAIMERS FOR EVALUATION MODULES

Texas Instruments Incorporated (TI) markets, sells, and loans all evaluation boards, kits, and/or modules (EVMs) pursuant to, and user expressly acknowledges, represents, and agrees, and takes sole responsibility and risk with respect to, the following:

1. User agrees and acknowledges that EVMs are intended to be handled and used for feasibility evaluation only in laboratory and/or development environments. Notwithstanding the foregoing, in certain instances, TI makes certain EVMs available to users that do not handle and use EVMs solely for feasibility evaluation only in laboratory and/or development environments, but may use EVMs in a hobbyist environment. All EVMs made available to hobbyist users are FCC certified, as applicable. Hobbyist users acknowledge, agree, and shall comply with all applicable terms, conditions, warnings, and restrictions in this document and are subject to the disclaimer and indemnity provisions included in this document.
2. Unless otherwise indicated, EVMs are not finished products and not intended for consumer use. EVMs are intended solely for use by technically qualified electronics experts who are familiar with the dangers and application risks associated with handling electrical mechanical components, systems, and subsystems.
3. User agrees that EVMs shall not be used as, or incorporated into, all or any part of a finished product.
4. User agrees and acknowledges that certain EVMs may not be designed or manufactured by TI.
5. User must read the user's guide and all other documentation accompanying EVMs, including without limitation any warning or restriction notices, prior to handling and/or using EVMs. Such notices contain important safety information related to, for example, temperatures and voltages. For additional information on TI's environmental and/or safety programs, please visit www.ti.com/esh or contact TI.
6. User assumes all responsibility, obligation, and any corresponding liability for proper and safe handling and use of EVMs.
7. Should any EVM not meet the specifications indicated in the user's guide or other documentation accompanying such EVM, the EVM may be returned to TI within 30 days from the date of delivery for a full refund. THE FOREGOING LIMITED WARRANTY IS THE EXCLUSIVE WARRANTY MADE BY TI TO USER AND IS IN LIEU OF ALL OTHER WARRANTIES, EXPRESSED, IMPLIED, OR STATUTORY, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE. TI SHALL NOT BE LIABLE TO USER FOR ANY INDIRECT, SPECIAL, INCIDENTAL, OR CONSEQUENTIAL DAMAGES RELATED TO THE HANDLING OR USE OF ANY EVM.
8. No license is granted under any patent right or other intellectual property right of TI covering or relating to any machine, process, or combination in which EVMs might be or are used. TI currently deals with a variety of customers, and therefore TI's arrangement with the user is not exclusive. TI assumes no liability for applications assistance, customer product design, software performance, or infringement of patents or services with respect to the handling or use of EVMs.
9. User assumes sole responsibility to determine whether EVMs may be subject to any applicable federal, state, or local laws and regulatory requirements (including but not limited to U.S. Food and Drug Administration regulations, if applicable) related to its handling and use of EVMs and, if applicable, compliance in all respects with such laws and regulations.
10. User has sole responsibility to ensure the safety of any activities to be conducted by it and its employees, affiliates, contractors or designees, with respect to handling and using EVMs. Further, user is responsible to ensure that any interfaces (electronic and/or mechanical) between EVMs and any human body are designed with suitable isolation and means to safely limit accessible leakage currents to minimize the risk of electrical shock hazard.
11. User shall employ reasonable safeguards to ensure that user's use of EVMs will not result in any property damage, injury or death, even if EVMs should fail to perform as described or expected.
12. User shall be solely responsible for proper disposal and recycling of EVMs consistent with all applicable federal, state, and local requirements.

Certain Instructions. User shall operate EVMs within TI's recommended specifications and environmental considerations per the user's guide, accompanying documentation, and any other applicable requirements. Exceeding the specified ratings (including but not limited to input and output voltage, current, power, and environmental ranges) for EVMs may cause property damage, personal injury or death. If there are questions concerning these ratings, user should contact a TI field representative prior to connecting interface electronics including input power and intended loads. Any loads applied outside of the specified output range may result in unintended and/or inaccurate operation and/or possible permanent damage to the EVM and/or interface electronics. Please consult the applicable EVM user's guide prior to connecting any load to the EVM output. If there is uncertainty as to the load specification, please contact a TI field representative. During normal operation, some circuit components may have case temperatures greater than 60°C as long as the input and output are maintained at a normal ambient operating temperature. These components include but are not limited to linear regulators, switching transistors, pass transistors, and current sense resistors which can be identified using EVMs' schematics located in the applicable EVM user's guide. When placing measurement probes near EVMs during normal operation, please be aware that EVMs may become very warm. As with all electronic evaluation tools, only qualified personnel knowledgeable in electronic measurement and diagnostics normally found in development environments should use EVMs.

Agreement to Defend, Indemnify and Hold Harmless. User agrees to defend, indemnify, and hold TI, its directors, officers, employees, agents, representatives, affiliates, licensors and their representatives harmless from and against any and all claims, damages, losses, expenses, costs and liabilities (collectively, "Claims") arising out of, or in connection with, any handling and/or use of EVMs. User's indemnity shall apply whether Claims arise under law of tort or contract or any other legal theory, and even if EVMs fail to perform as described or expected.

Safety-Critical or Life-Critical Applications. If user intends to use EVMs in evaluations of safety critical applications (such as life support), and a failure of a TI product considered for purchase by user for use in user's product would reasonably be expected to cause severe personal injury or death such as devices which are classified as FDA Class III or similar classification, then user must specifically notify TI of such intent and enter into a separate Assurance and Indemnity Agreement.

RADIO FREQUENCY REGULATORY COMPLIANCE INFORMATION FOR EVALUATION MODULES

Texas Instruments Incorporated (TI) evaluation boards, kits, and/or modules (EVMs) and/or accompanying hardware that is marketed, sold, or loaned to users may or may not be subject to radio frequency regulations in specific countries.

General Statement for EVMs Not Including a Radio

For EVMs not including a radio and not subject to the U.S. Federal Communications Commission (FCC) or Industry Canada (IC) regulations, TI intends EVMs to be used only for engineering development, demonstration, or evaluation purposes. EVMs are not finished products typically fit for general consumer use. EVMs may nonetheless generate, use, or radiate radio frequency energy, but have not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC or the ICES-003 rules. Operation of such EVMs may cause interference with radio communications, in which case the user at his own expense will be required to take whatever measures may be required to correct this interference.

General Statement for EVMs including a radio

User Power/Frequency Use Obligations: For EVMs including a radio, the radio included in such EVMs is intended for development and/or professional use only in legally allocated frequency and power limits. Any use of radio frequencies and/or power availability in such EVMs and their development application(s) must comply with local laws governing radio spectrum allocation and power limits for such EVMs. It is the user's sole responsibility to only operate this radio in legally acceptable frequency space and within legally mandated power limitations. Any exceptions to this are strictly prohibited and unauthorized by TI unless user has obtained appropriate experimental and/or development licenses from local regulatory authorities, which is the sole responsibility of the user, including its acceptable authorization.

U.S. Federal Communications Commission Compliance

For EVMs Annotated as FCC – FEDERAL COMMUNICATIONS COMMISSION Part 15 Compliant

Caution

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Changes or modifications could void the user's authority to operate the equipment.

FCC Interference Statement for Class A EVM devices

This equipment has been tested and found to comply with the limits for a Class A digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference when the equipment is operated in a commercial environment. This equipment generates, uses, and can radiate radio frequency energy and, if not installed and used in accordance with the instruction manual, may cause harmful interference to radio communications. Operation of this equipment in a residential area is likely to cause harmful interference in which case the user will be required to correct the interference at its own expense.

FCC Interference Statement for Class B EVM devices

This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

Industry Canada Compliance (English)

For EVMs Annotated as IC – INDUSTRY CANADA Compliant:

This Class A or B digital apparatus complies with Canadian ICES-003.

Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

Concerning EVMs Including Radio Transmitters

This device complies with Industry Canada licence-exempt RSS standard(s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Concerning EVMs Including Detachable Antennas

Under Industry Canada regulations, this radio transmitter may only operate using an antenna of a type and maximum (or lesser) gain approved for the transmitter by Industry Canada. To reduce potential radio interference to other users, the antenna type and its gain should be so chosen that the equivalent isotropically radiated power (e.i.r.p.) is not more than that necessary for successful communication.

This radio transmitter has been approved by Industry Canada to operate with the antenna types listed in the user guide with the maximum permissible gain and required antenna impedance for each antenna type indicated. Antenna types not included in this list, having a gain greater than the maximum gain indicated for that type, are strictly prohibited for use with this device.

Canada Industry Canada Compliance (French)

Cet appareil numérique de la classe A ou B est conforme à la norme NMB-003 du Canada

Les changements ou les modifications pas expressément approuvés par la partie responsable de la conformité ont pu vider l'autorité de l'utilisateur pour actionner l'équipement.

Concernant les EVMs avec appareils radio

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Concernant les EVMs avec antennes détachables

Conformément à la réglementation d'Industrie Canada, le présent émetteur radio peut fonctionner avec une antenne d'un type et d'un gain maximal (ou inférieur) approuvé pour l'émetteur par Industrie Canada. Dans le but de réduire les risques de brouillage radioélectrique à l'intention des autres utilisateurs, il faut choisir le type d'antenne et son gain de sorte que la puissance isotrope rayonnée équivalente (p.i.r.e.) ne dépasse pas l'intensité nécessaire à l'établissement d'une communication satisfaisante.

Le présent émetteur radio a été approuvé par Industrie Canada pour fonctionner avec les types d'antenne énumérés dans le manuel d'usage et ayant un gain admissible maximal et l'impédance requise pour chaque type d'antenne. Les types d'antenne non inclus dans cette liste, ou dont le gain est supérieur au gain maximal indiqué, sont strictement interdits pour l'exploitation de l'émetteur.

Mailing Address: Texas Instruments, Post Office Box 655303, Dallas, Texas 75265
Copyright © 2014, Texas Instruments Incorporated

Important Notice for Users of EVMs Considered “Radio Frequency Products” in Japan

EVMs entering Japan are NOT certified by TI as conforming to Technical Regulations of Radio Law of Japan.

If user uses EVMs in Japan, user is required by Radio Law of Japan to follow the instructions below with respect to EVMs:

1. Use EVMs in a shielded room or any other test facility as defined in the notification #173 issued by Ministry of Internal Affairs and Communications on March 28, 2006, based on Sub-section 1.1 of Article 6 of the Ministry's Rule for Enforcement of Radio Law of Japan,
2. Use EVMs only after user obtains the license of Test Radio Station as provided in Radio Law of Japan with respect to EVMs, or
3. Use of EVMs only after user obtains the Technical Regulations Conformity Certification as provided in Radio Law of Japan with respect to EVMs. Also, do not transfer EVMs, unless user gives the same notice above to the transferee. Please note that if user does not follow the instructions above, user will be subject to penalties of Radio Law of Japan.

<http://www.tij.co.jp>

【無線電波を送信する製品の開発キットをお使いになる際の注意事項】 本開発キットは技術基準適合証明を受けておりません。本製品のご使用に際しては、電波法遵守のため、以下のいずれかの措置を取っていただく必要がありますのでご注意ください。

1. 電波法施行規則第6条第1項第1号に基づく平成18年3月28日総務省告示第173号で定められた電波暗室等の試験設備でご利用いただく。
2. 実験局の免許を取得後ご利用いただく。
3. 技術基準適合証明を取得後ご利用いただく。。

なお、本製品は、上記の「ご使用にあたっての注意」を譲渡先、移転先に通知しない限り、譲渡、移転できないものとします

上記を遵守頂けない場合は、電波法の罰則が適用される可能性があることをご留意ください。

日本テキサス・インスツルメンツ株式会社

東京都新宿区西新宿 6 丁目 2 4 番 1 号

西新宿三井ビル

<http://www.tij.co.jp>

Texas Instruments Japan Limited

(address) 24-1, Nishi-Shinjuku 6 chome, Shinjuku-ku, Tokyo, Japan

IMPORTANT NOTICE

Texas Instruments Incorporated and its subsidiaries (TI) reserve the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services per JESD46, latest issue, and to discontinue any product or service per JESD48, latest issue. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as "components") are sold subject to TI's terms and conditions of sale supplied at the time of order acknowledgment.

TI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in TI's terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent TI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

TI assumes no liability for applications assistance or the design of Buyers' products. Buyers are responsible for their products and applications using TI components. To minimize the risks associated with Buyers' products and applications, Buyers should provide adequate design and operating safeguards.

TI does not warrant or represent that any license, either express or implied, is granted under any patent right, copyright, mask work right, or other intellectual property right relating to any combination, machine, or process in which TI components or services are used. Information published by TI regarding third-party products or services does not constitute a license to use such products or services or a warranty or endorsement thereof. Use of such information may require a license from a third party under the patents or other intellectual property of the third party, or a license from TI under the patents or other intellectual property of TI.

Reproduction of significant portions of TI information in TI data books or data sheets is permissible only if reproduction is without alteration and is accompanied by all associated warranties, conditions, limitations, and notices. TI is not responsible or liable for such altered documentation. Information of third parties may be subject to additional restrictions.

Resale of TI components or services with statements different from or beyond the parameters stated by TI for that component or service voids all express and any implied warranties for the associated TI component or service and is an unfair and deceptive business practice. TI is not responsible or liable for any such statements.

Buyer acknowledges and agrees that it is solely responsible for compliance with all legal, regulatory and safety-related requirements concerning its products, and any use of TI components in its applications, notwithstanding any applications-related information or support that may be provided by TI. Buyer represents and agrees that it has all the necessary expertise to create and implement safeguards which anticipate dangerous consequences of failures, monitor failures and their consequences, lessen the likelihood of failures that might cause harm and take appropriate remedial actions. Buyer will fully indemnify TI and its representatives against any damages arising out of the use of any TI components in safety-critical applications.

In some cases, TI components may be promoted specifically to facilitate safety-related applications. With such components, TI's goal is to help enable customers to design and create their own end-product solutions that meet applicable functional safety standards and requirements. Nonetheless, such components are subject to these terms.

No TI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Only those TI components which TI has specifically designated as military grade or "enhanced plastic" are designed and intended for use in military/aerospace applications or environments. Buyer acknowledges and agrees that any military or aerospace use of TI components which have **not** been so designated is solely at the Buyer's risk, and that Buyer is solely responsible for compliance with all legal and regulatory requirements in connection with such use.

TI has specifically designated certain components as meeting ISO/TS16949 requirements, mainly for automotive use. In any case of use of non-designated products, TI will not be responsible for any failure to meet ISO/TS16949.

Products

Audio	www.ti.com/audio
Amplifiers	amplifier.ti.com
Data Converters	dataconverter.ti.com
DLP® Products	www.dlp.com
DSP	dsp.ti.com
Clocks and Timers	www.ti.com/clocks
Interface	interface.ti.com
Logic	logic.ti.com
Power Mgmt	power.ti.com
Microcontrollers	microcontroller.ti.com
RFID	www.ti-rfid.com
OMAP Applications Processors	www.ti.com/omap
Wireless Connectivity	www.ti.com/wirelessconnectivity

Applications

Automotive and Transportation	www.ti.com/automotive
Communications and Telecom	www.ti.com/communications
Computers and Peripherals	www.ti.com/computers
Consumer Electronics	www.ti.com/consumer-apps
Energy and Lighting	www.ti.com/energy
Industrial	www.ti.com/industrial
Medical	www.ti.com/medical
Security	www.ti.com/security
Space, Avionics and Defense	www.ti.com/space-avionics-defense
Video and Imaging	www.ti.com/video

TI E2E Community

e2e.ti.com