

N-channel 650 V, 0.182 Ω typ., 20 A, MDmesh™ DM2 Power MOSFET in a PowerFLAT™ 8x8 HV package

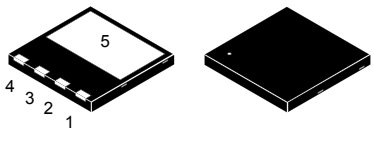

PowerFLAT™ 8x8 HV

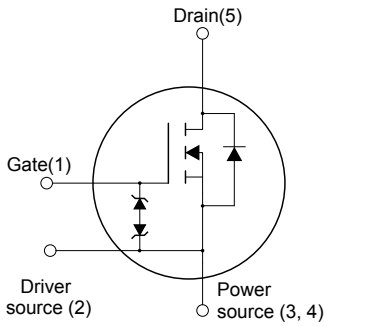

Features

Order code	V_{DS}	$R_{DS(on)}$ max.	I_D	P_{TOT}
STL26N65DM2	650 V	0.206 Ω	20 A	140 W

- Fast-recovery body diode
- Extremely low gate charge and input capacitance
- Low on-resistance
- 100% avalanche tested
- Extremely high dv/dt ruggedness
- Zener-protected

Applications

- Switching applications

Description

This high-voltage N-channel Power MOSFET is part of the MDmesh™ DM2 fast-recovery diode series. It offers very low recovery charge (Q_{rr}) and time (t_{rr}) combined with low $R_{DS(on)}$, rendering it suitable for the most demanding high-efficiency converters and ideal for bridge topologies and ZVS phase-shift converters.

Product status link
STL26N65DM2

Product summary	
Order code	STL26N65DM2
Marking	26N65DM2
Package	PowerFLAT™ 8x8 HV
Packing	Tape and reel

1 Electrical ratings

Table 1. Absolute maximum ratings

Symbol	Parameter	Value	Unit
V_{GS}	Gate-source voltage	±25	V
I_D	Drain current (continuous) at T_{case} = 25 °C	20	A
	Drain current (continuous) at T_{case} = 100 °C	12.6	
I_{DM}(1)	Drain current (pulsed)	53	A
P_{TOT}	Total dissipation at T_{case} = 25 °C	140	W
dv/dt(2)	Peak diode recovery voltage slope	50	V/ns
dv/dt(3)	MOSFET dv/dt ruggedness	50	
T_{stg}	Storage temperature range	-55 to 150	°C
T_j	Operating junction temperature range		

1. *Pulse width is limited by safe operating area.*
2. *I_{SD} ≤ 20 A, di/dt=900 A/µs, V_{DD} = 400 V, $V_{DS(peak)}$ < $V_{(BR)DSS}$*
3. *V_{DS} ≤ 520 V*

Table 2. Thermal data

Symbol	Parameter	Value	Unit
$R_{thj\text{-}case}$	Thermal resistance junction-case	0.89	°C/W
$R_{thj\text{-}pcb}$(1)	Thermal resistance junction-pcb	45	

1. *When mounted on an 1-inch² FR-4, 2oz Cu board*

Table 3. Avalanche characteristics

Symbol	Parameter	Value	Unit
I_{AR}(1)	Avalanche current, repetitive or not repetitive	3	A
E_{AS}(2)	Single pulse avalanche energy	530	mJ

1. *Pulse width limited by T_{jmax}*
2. *Starting T_j = 25 °C, I_D = I_{AR}, V_{DD} = 50 V*

2 Electrical characteristics

(T_{case} = 25 °C unless otherwise specified)

Table 4. Static

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)DSS}$	Drain-source breakdown voltage	V_{GS} = 0 V, I_D = 1 mA	650			V
I_{DSS}	Zero gate voltage drain current	V_{GS} = 0 V, V_{DS} = 650 V			1	µA
		V_{GS} = 0 V, V_{DS} = 650 V, T_{case} = 125 °C(1)			100	
I_{GSS}	Gate-body leakage current	V_{DS} = 0 V, V_{GS} = ±25 V			±5	µA
$V_{GS(th)}$	Gate threshold voltage	V_{DS} = V_{GS}, I_D = 250 µA	3	4	5	V
$R_{DS(on)}$	Static drain-source on-resistance	V_{GS} = 10 V, I_D = 10 A		0.182	0.206	Ω

1. *Defined by design, not subject to production test.*

Table 5. Dynamic

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
C_{iss}	Input capacitance	V_{DS} = 100 V, f = 1 MHz, V_{GS} = 0 V	-	1480	-	pF
C_{oss}	Output capacitance		-	62	-	
C_{rss}	Reverse transfer capacitance		-	2	-	
$C_{oss\ eq.}$(1)	Equivalent output capacitance	V_{DS} = 0 to 520 V, V_{GS} = 0 V	-	140	-	pF
R_G	Intrinsic gate resistance	f = 1 MHz, I_D = 0 A	-	4.6	-	Ω
Q_g	Total gate charge	V_{DD} = 520 V, I_D = 20 A, V_{GS} = 0 to 10 V (see Figure 14. Gate charge test circuit)	-	35.5	-	nC
Q_{gs}	Gate-source charge		-	8.2	-	
Q_{gd}	Gate-drain charge		-	17.6	-	

1. *$C_{oss\ eq.}$ is defined as the constant equivalent capacitance giving the same charging time as C_{oss} when V_{DS} increases from 0 to 80% V_{DSS}.*

Table 6. Switching times

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	V_{DD} = 325 V, I_D = 10 A, R_G = 4.7 Ω, V_{GS} = 10 V (see Figure 13. Switching times test circuit for resistive load and Figure 18. Switching time waveform)	-	17	-	ns
t_r	Rise time		-	7	-	
$t_{d(off)}$	Turn-off delay time		-	51	-	
t_f	Fall time		-	10	-	

Table 7. Source-drain diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
I_{SD}	Source-drain current		-		20	A
I_{SDM}(1)	Source-drain current (pulsed)		-		53	A
V_{SD}(2)	Forward on voltage	V_{GS} = 0 V, I_{SD} = 20 A	-		1.6	V
t_{rr}	Reverse recovery time	I_{SD} = 20 A, di/dt = 100 A/µs, V_{DD} = 100 V (see Figure 15. Test circuit for inductive load switching and diode recovery times)	-	100		ns
Q_{rr}	Reverse recovery charge		-	0.365		µC
I_{RRM}	Reverse recovery current		-	7.3		A
t_{rr}	Reverse recovery time	I_{SD} = 20 A, di/dt = 100 A/µs, V_{DD} = 100 V, T_j = 150 °C (see Figure 15. Test circuit for inductive load switching and diode recovery times)	-	200		ns
Q_{rr}	Reverse recovery charge		-	1.39		µC
I_{RRM}	Reverse recovery current		-	13.9		A

1. *Pulse width is limited by safe operating area.*
2. *Pulse test: pulse duration = 300 µs, duty cycle 1.5%.*

Table 8. Gate-source Zener diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)GSO}$	Gate-source breakdown voltage	I_{GS} = ±1 mA, I_D = 0 A	±30	-	-	V

The built-in back-to-back Zener diodes are specifically designed to enhance the ESD performance of the device. The Zener voltage facilitates efficient and cost-effective device integrity protection, thus eliminating the need for additional external componentry.

2.1 Electrical characteristics (curves)

Figure 1. Safe operating area

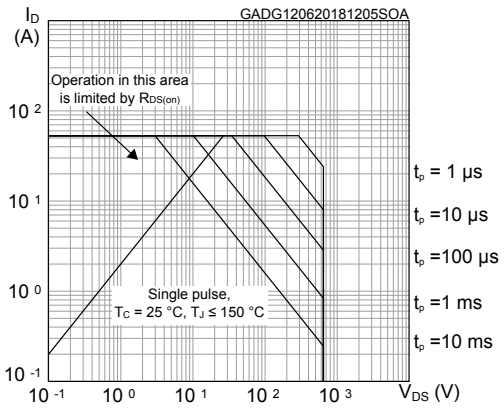


Figure 2. Thermal impedance

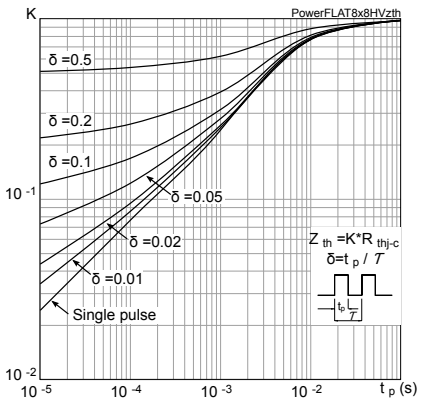


Figure 3. Output characteristics

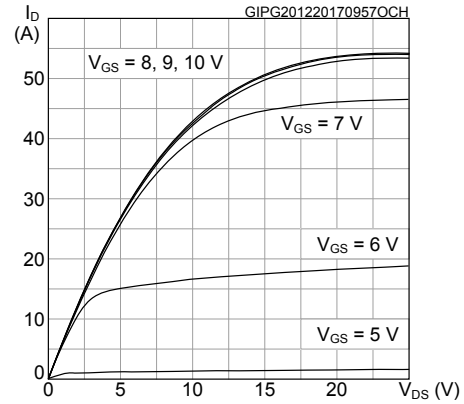


Figure 4. Transfer characteristics

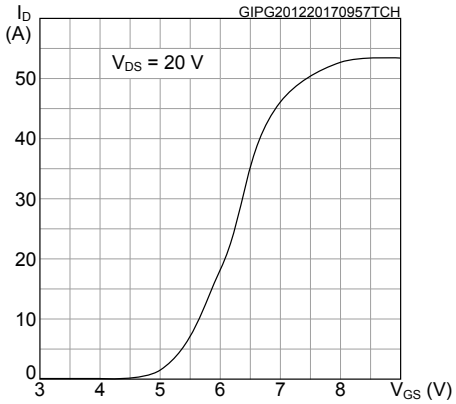


Figure 5. Gate charge vs gate-source voltage

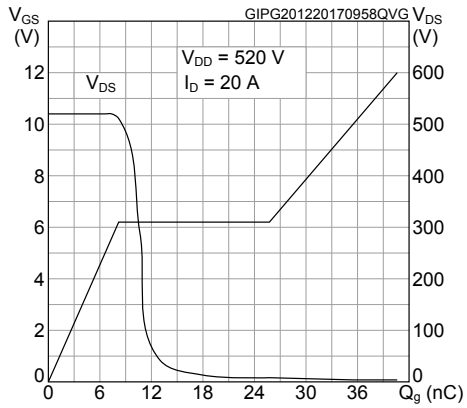


Figure 6. Static drain-source on-resistance

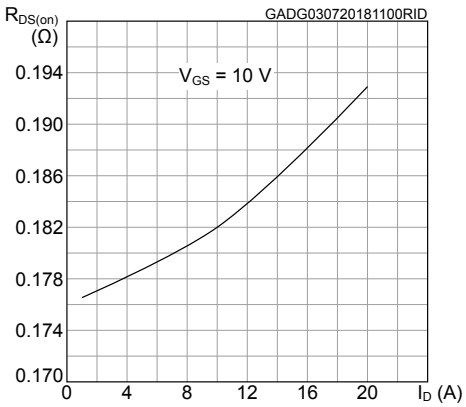


Figure 7. Capacitance variations

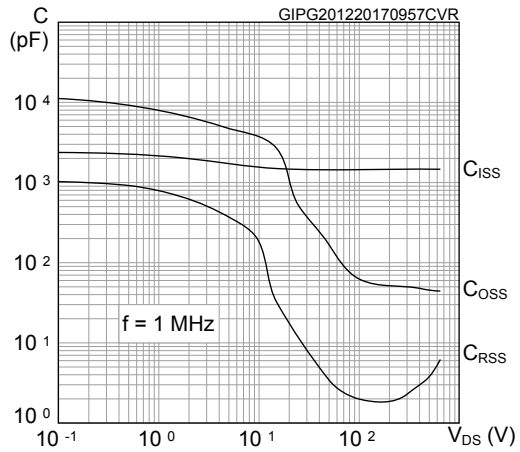


Figure 8. Normalized gate threshold voltage vs temperature

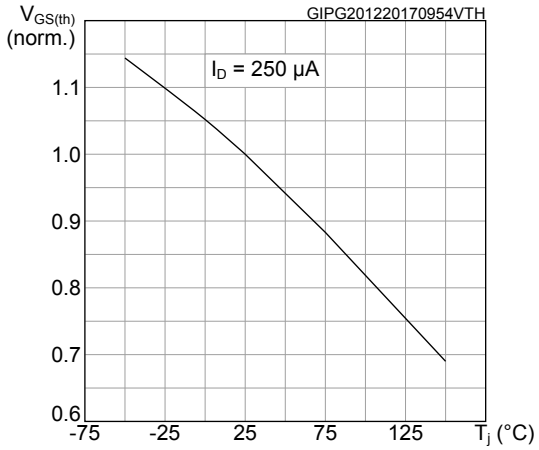


Figure 9. Normalized on-resistance vs temperature

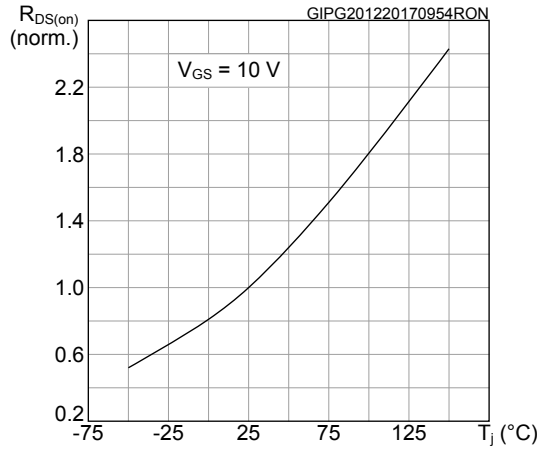


Figure 10. Normalized $V_{(BR)DSS}$ vs temperature

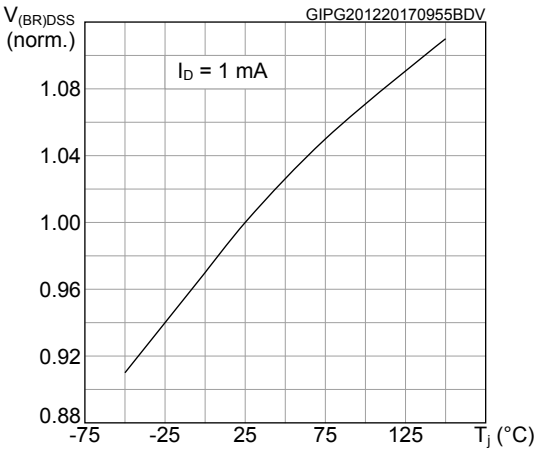


Figure 11. Output capacitance stored energy


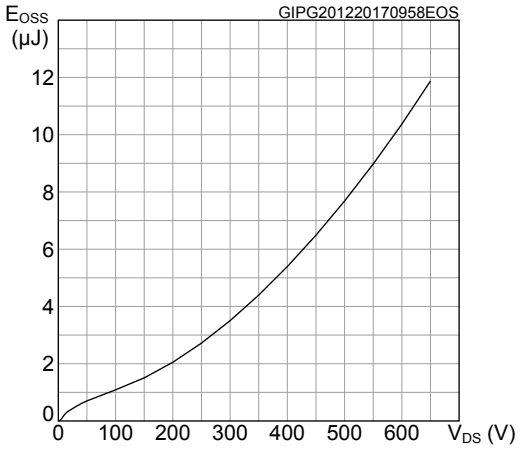


Figure 12. Source-drain diode forward characteristics

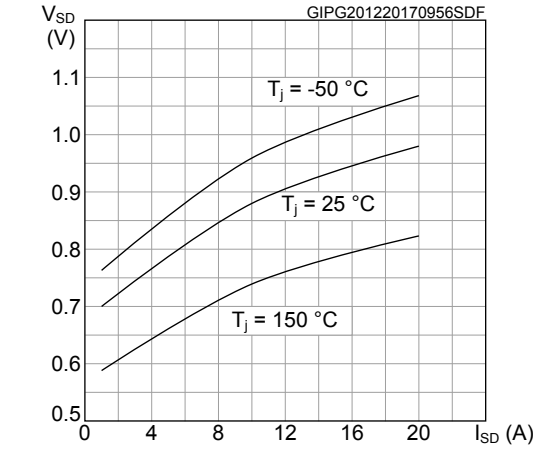

3 Test circuits

Figure 13. Switching times test circuit for resistive load

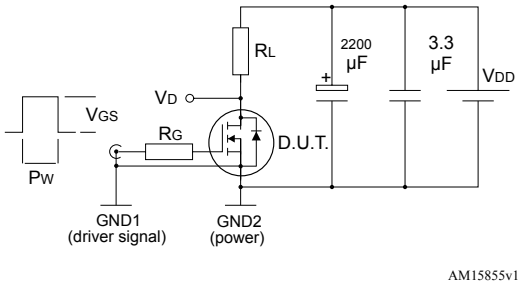


Figure 14. Gate charge test circuit

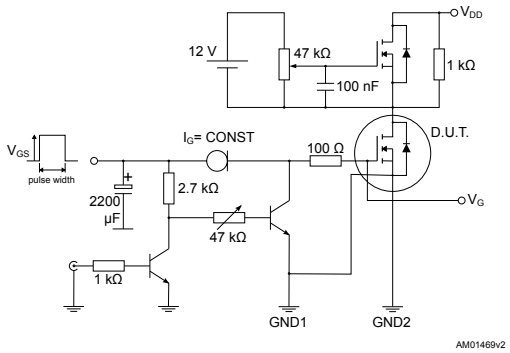


Figure 15. Test circuit for inductive load switching and diode recovery times

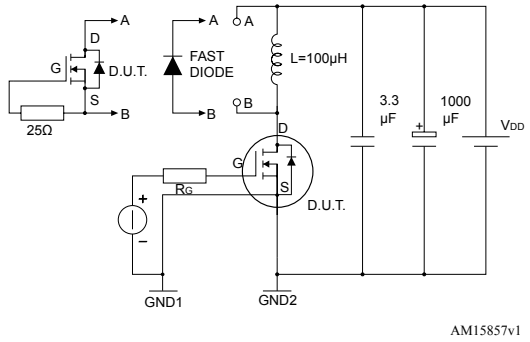


Figure 16. Unclamped inductive load test circuit

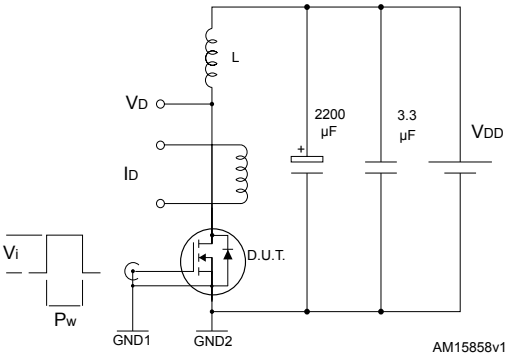


Figure 17. Unclamped inductive waveform


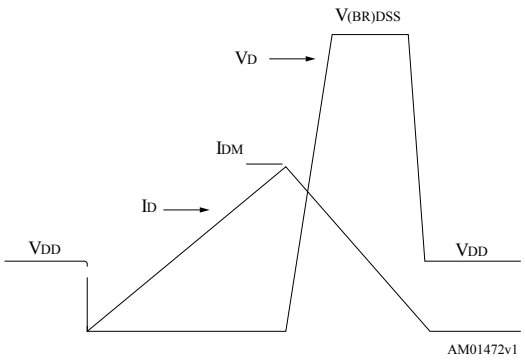


Figure 18. Switching time waveform

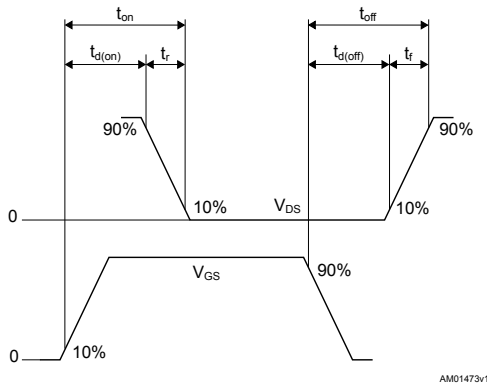

4 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

4.1 PowerFLAT™ 8x8 HV package information

Figure 19. **PowerFLAT™ 8x8 HV package outline**


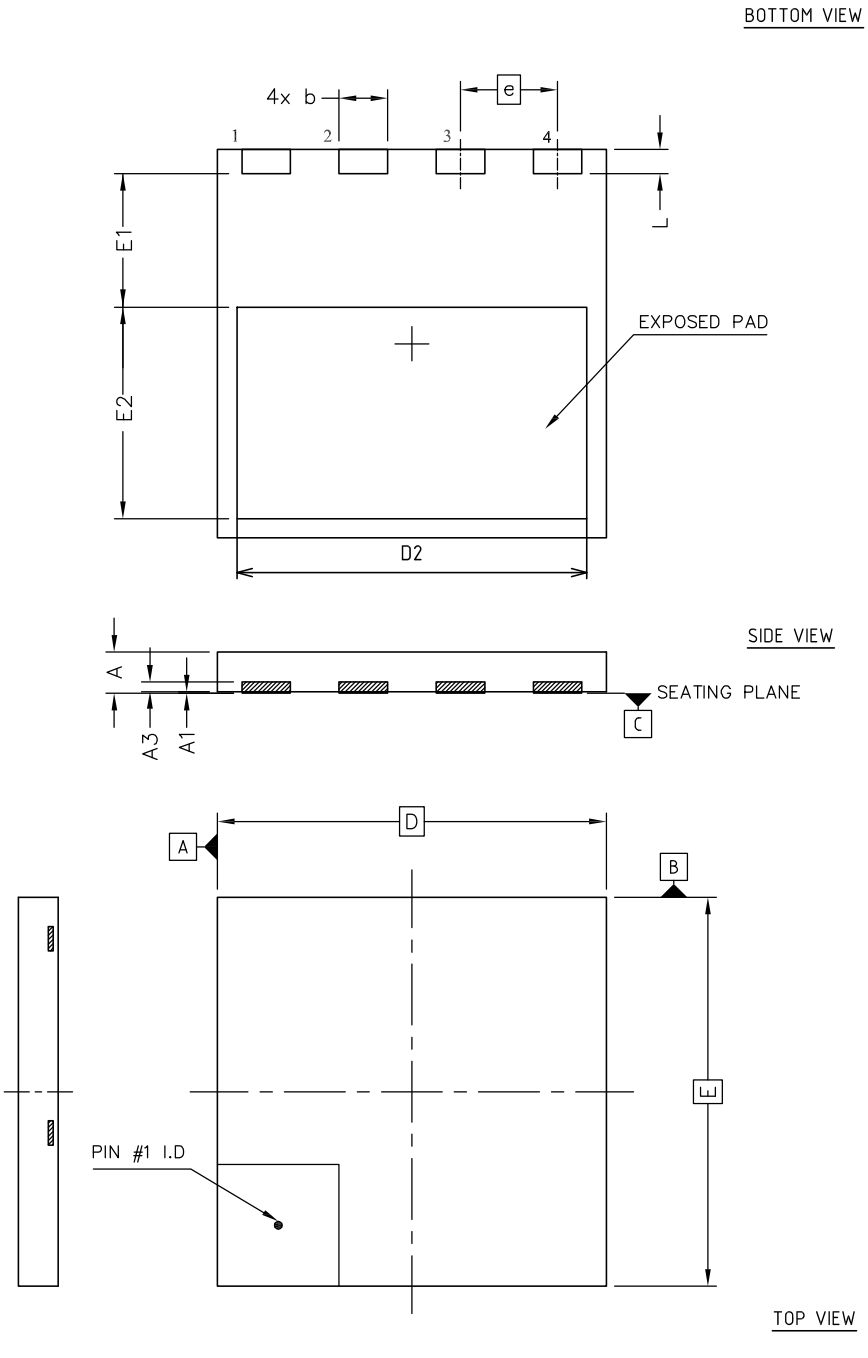


Table 9. PowerFLAT™ 8x8 HV mechanical data

Ref.	Dimensions (in mm)		
	Min.	Typ.	Max.
A	0.75	0.85	0.95
A1	0.00		0.05
A3	0.10	0.20	0.30
b	0.90	1.00	1.10
D	7.90	8.00	8.10
E	7.90	8.00	8.10
D2	7.10	7.20	7.30
E1	2.65	2.75	2.85
E2	4.25	4.35	4.45
e		2.00 BSC	
L	0.40	0.50	0.60


Figure 20. PowerFLAT™ 8x8 HV footprint

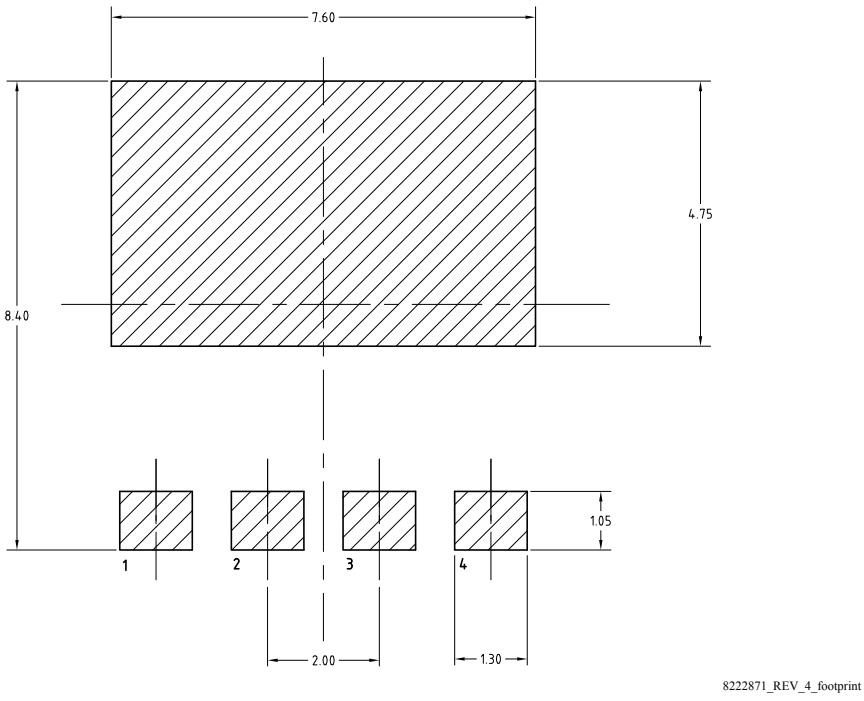

Note: All dimensions are in millimeters.

4.2 PowerFLAT™ 8x8 HV packing information

Figure 21. PowerFLAT™ 8x8 HV tape

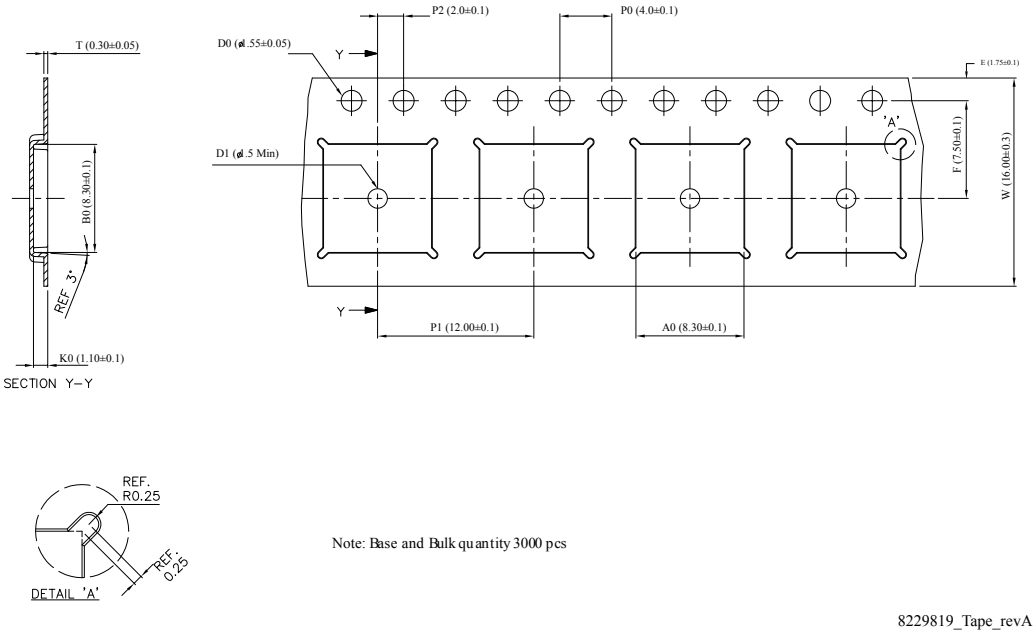

Note: All dimensions are in millimeters.

Figure 22. PowerFLAT™ 8x8 HV package orientation in carrier tape


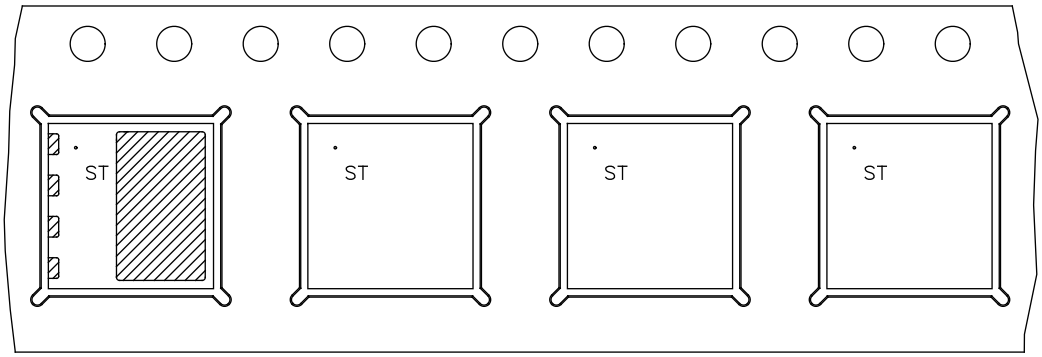


Figure 23. **PowerFLAT™ 8x8 HV reel**

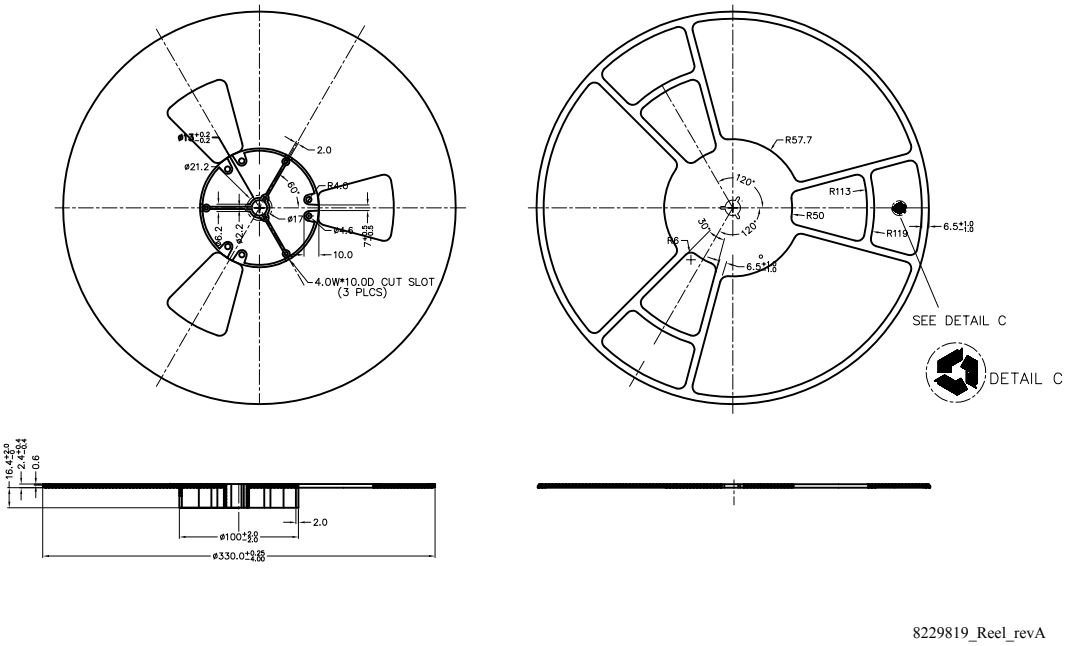

Note: All dimensions are in millimeters.

Revision history

Table 10. **Document revision history**

Date	Version	Changes
03-Jul-2018	1	Initial release.

Contents

1 **Electrical ratings** 2

2 **Electrical characteristics** 3

2.1 Electrical characteristics (curves) 5

3 **Test circuits** 7

4 **Package information** 8

4.1 PowerFLAT™ 8x8 HV package information 8

4.2 PowerFLAT™ 8x8 HV packing information 11

Revision history 13

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved