


1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.  
2 OZ. COPPER FINISH ON OUTER LAYERS.  
1 OZ. COPPER FINISH ON INNER LAYERS.  
THICKNESS .062 +/- .006 TOTAL OF 6 LAYERS.  
FLAMABILITY RATING: 94 V-0 MINIMUM .  
0.00 ARE DIMENSIONS AND TOLERANCES SHOWN.
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.  
0.00 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH  
HOLES WITH COPPER, .001 INCH THICK MIN. ALL  
HOLE SIZES ARE SPECIFIED AFTER PLATING.  
HOLE LOCATION TOLERANCES ARE +/- .003  
INCH IN RELATION TO CENTER
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.

SIZE	QTY	SYM	PLTD
65	3	+	PLTD
35	18	×	PLTD
10	647	□	PLTD
187	4	◇	PLTD
70	2	⊗	NPLTD
40	2	⊗	PLTD

**10. SCORING:**

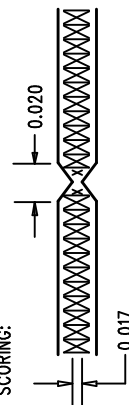

UNLESS OTHERWISE SPECIFIED  
DIMENSIONS ARE IN INCHES  
TOLERANCES ON ANGLE  $\pm 1$   
2 PLACE  $\pm 0.1$  3 PLACE  $\pm 0.05$   
INTERPRET DIM AND TOL  
PER ASME Y14.5M - 1994

	INIT	DATE
DRAWN		
CHECK		
DESIGN	JUNE WU	10/28/04
ENGR	Derek R.	10/28/04

**LINEAR**  
**TECHNOLOGY**

**TITLE:** LTC2208 FAMILY  
16-BIT HIGH SPEED ADC

SIZE	DEMO	REV.
A	DC854D	D

DES-250 SHT 1 of 1