


REVISIONS			
REV	DESCRIPTION	APPR	DATE
A-1	FINAL FABRICATION	CM	02-04-08

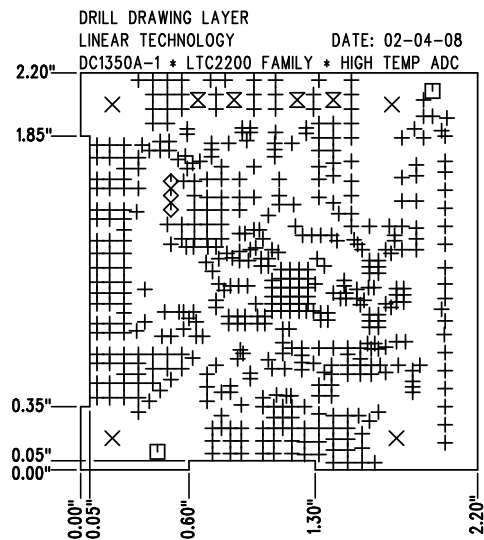


SHOWN FROM COMPONENT SIDE

SIZE	QTY	SYM	PLATED	TOL
0.012	482	+	YES	+/-0.003"
0.188	4	X	YES	+/-0.003"
0.07	2	□	NO	+/-0.003"
0.035	3	◇	YES	+/-0.003"
0.064	4	⊗	YES	+/-0.003"

NOTES: UNLESS OTHERWISE SPECIFIED

- FAB PER IPC-A-600
- MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4
FINISHED THICKNESS TO BE 0.062" +/- .005"
TOTAL OF 4 LAYERS WITH 2 OZ. CU ON THE
OUTER LAYERS AND 1 OZ. CU ON THE INNER LAYERS.
FLAMMABILITY RATING: 94 V-0 MINIMUM .
- SIZE: CUT TO DIMENSIONS AND TOLERANCES SHOWN.
0.00" ARE PRIMARY DATUMS.
- DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH
HOLES WITH COPPER, 0.001" THICK MIN.
ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.
HOLE LOCATION TOLERANCES ARE +/-0.003"
IN RELATION TO CENTER
- FINISH: SMOBC USING LPI BOTH SIDES, COLOR GREEN.
GOLD IMMERSION. (USE LEAD FREE SOLDER FOR PROTOTYPE)
FOR SILKSCREEN: USE WHITE NON-CONDUCTIVE INK.
- DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
PAD SIZE CAN BE MODIFIED TO MEET END FINISH.
- PCBS ARE TO BE RoHS COMPLIANT.
- SCORING FOR PANELIZED PCB:



APPROVALS

	INIT	DATE
DRAWN		
CHECK		
DESIGN	KIM T.	02-04-08
ENGR	CLARENCE M.	02-04-08
SCALE = NONE		



TITLE: FABRICATION DRAWING
HIGH TEMP ADC

SIZE	DEMO	REV.
A	DC1350A-1 * LTC2200 FAMILY	A-1

SHT 1 of 1