IXYS

Polar™ Power MOSFET

IXTP18N60PM

V_{DSS} = 600V
I_{D25} = 9A
$R_{DS(on)}$ ≤ 420mΩ

(Electrically Isolated Tab)

N-Channel Enhancement Mode
Avalanche Rated



OVERMOLDED (IXTP...M) OUTLINE



G = Gate D = Drain
S = Source

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	600	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ	600	V
V_{GSS}	Continuous	±30	V
V_{GSM}	Transient	±40	V
I_{D25}	T_C = 25°C	9	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}	54	A
I_A	T_C = 25°C	18	A
E_{AS}	T_C = 25°C	1	J
dv/dt	$I_S \le I_{DM}$, $V_{DD} \le V_{DSS}$, $T_J \le 150°C$	10	V/ns
P_D	T_C = 25°C	90	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
T_L	1.6mm (0.062in.) from Case for 10s	300	°C
T_{sold}	Plastic Body for 10 Seconds	260	°C
M_d	Mounting Torque	1.13 / 10	Nm/lb.in.
Weight		2.5	g

Symbol	Test Conditions (T_J = 25°C Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = 250μA	600			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 250μA	2.5		4.5	V
I_{GSS}	V_{GS} = ± 30V, V_{DS} = 0V			±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			25	μA
	T_J = 125°C			250	μA
$R_{DS(on)}$	V_{GS} = 10V, I_D = 9A, Note 1			420	mΩ

Features

- Plastic Overmolded Tab for Electrical Isolation
- International Standard Package
- Low $R_{DS(on)}$ and Q_G
- Avalanche Rated
- Low Package Inductance
- Fast Intrinsic Rectifier

Advantages

- High Power Density
- Easy to Mount
- Space Savings

Applications

- Switch-Mode and Resonant-Mode Power Supplies
- DC-DC Converters
- Laser Drivers
- AC and DC Motor Drives
- Robotics and Servo Controls

© 2010 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = 20V, I_D = 9A, Note 1	9	16		S
C_{iss}	V_{GS} = 0V, V_{DS} = 25V, f = 1MHz		2500		pF
C_{oss}			280		pF
C_{rss}			23		pF
$t_{d(on)}$	**Resistive Switching Times** V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 9A R_G = 5Ω (External)		21		ns
t_r			22		ns
$t_{d(off)}$			62		ns
t_f			22		ns
$Q_{g(on)}$	V_{GS} = 10V, V_{DS} = 0.5 • V_{DSS}, I_D = 9A		50		nC
Q_{gs}			15		nC
Q_{gd}			18		nC
R_{thJC}				1.39	°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			18	A
I_{SM}	Repetitive, Pulse Width Limited by T_{JM}			54	A
V_{SD}	I_F = I_S, V_{GS} = 0V, Note 1			1.5	V
t_{rr}	I_F = I_S, V_{GS} = 0V, -di/dt = 100A/μs V_R = 100V		500		ns

OVERMOLDED TO-220

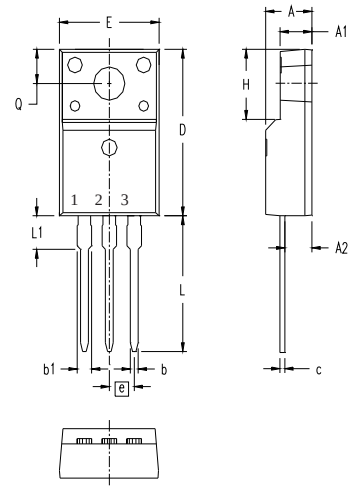

Terminals: 1 - Gate
2 - Drain (Collector)
3 - Source (Emitter)

SYM	INCHES MIN	INCHES MAX	MILLIMETERS MIN	MILLIMETERS MAX
A	.177	.193	4.50	4.90
A1	.092	.108	2.34	2.74
A2	.101	.117	2.56	2.96
b	.028	.035	0.70	0.90
b1	.050	.058	1.27	1.47
c	.018	.024	0.45	0.60
D	.617	.633	15.67	16.07
E	.392	.408	9.96	10.36
e	.100 BSC		2.54 BSC	
H	.255	.271	6.48	6.88
L	.499	.523	12.68	13.28
L1	.119	.135	3.03	3.43
ØP	.121	.129	3.08	3.28
Q	.126	.134	3.20	3.40

Note: 1. Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.

IXYS Reserves the Right to Change Limits,Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or moreof the following U.S. patents: 4,835,592 4,850,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

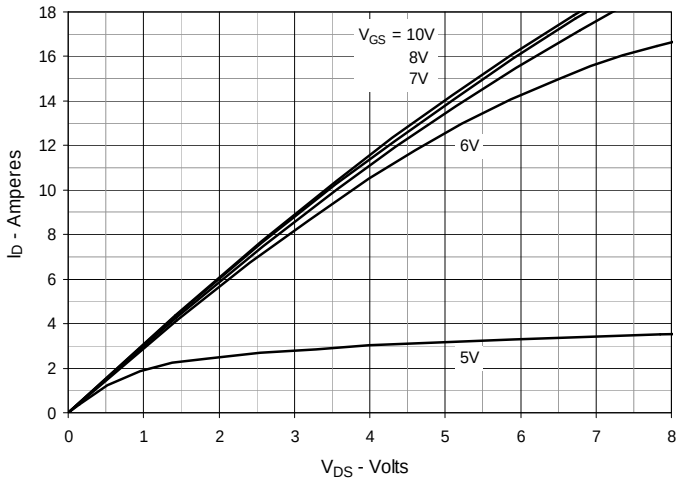

Fig. 2. Extended Output Characteristics @ T_J = 25ºC

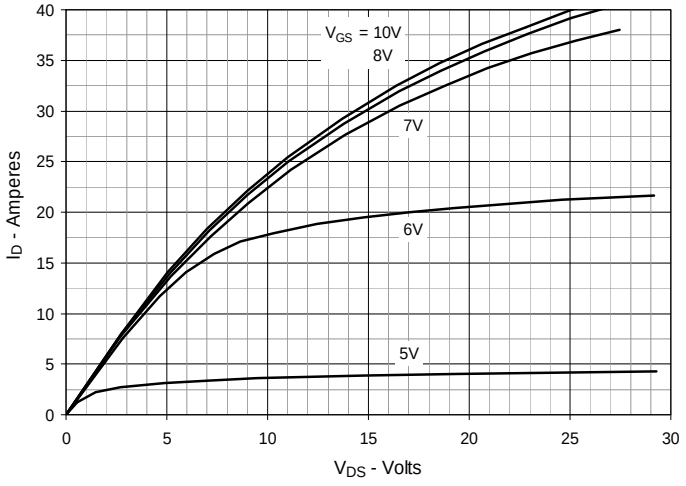

Fig. 3. Output Characteristics @ T_J =125ºC

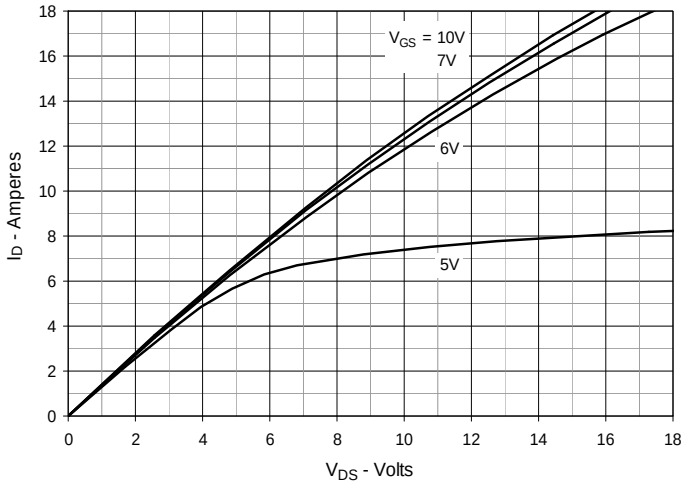

Fig. 4. $R_{DS(on)}$ Normalized to I_D = 9A Value vs. Junction Temperature

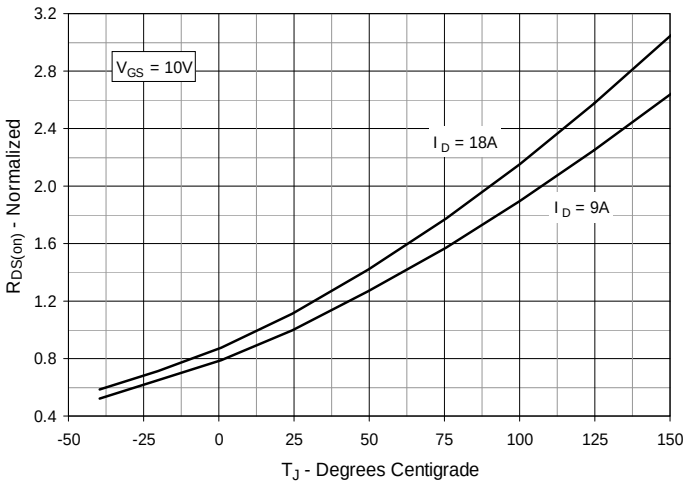

Fig. 5. $R_{DS(on)}$ Normalized to I_D = 9A Value vs. Drain Current

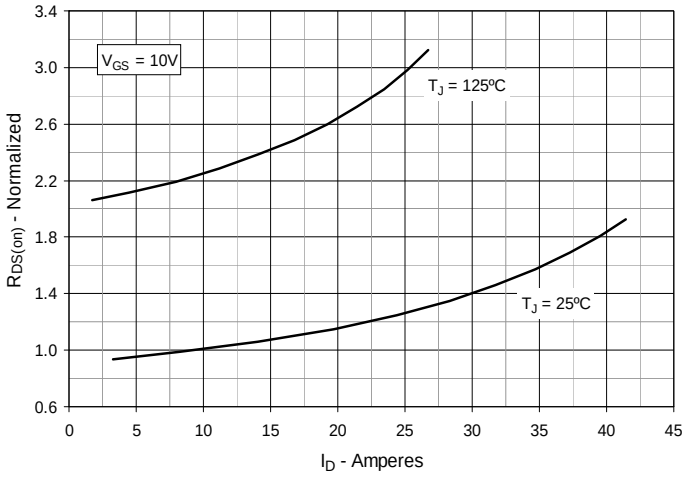

Fig. 6. Maximum Drain Current vs. Case Temperature

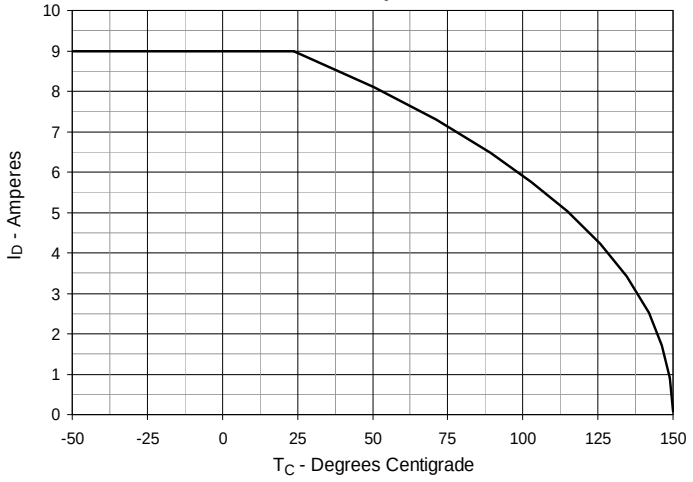

© 2010 IXYS CORPORATION, All Rights Reserved

Fig. 7. Input Admittance

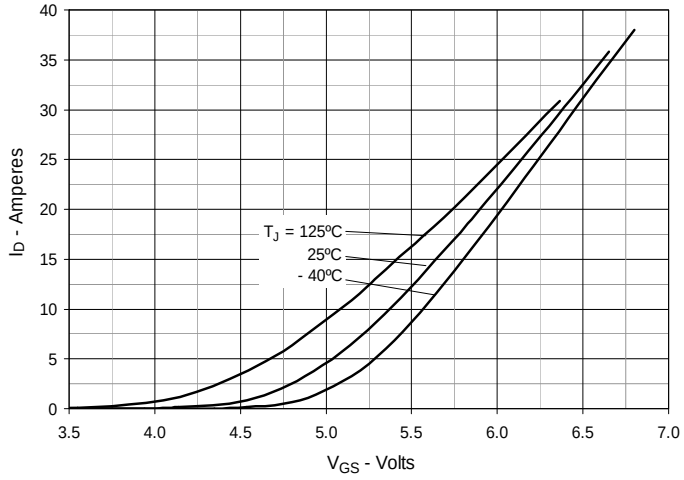

Fig. 8. Transconductance

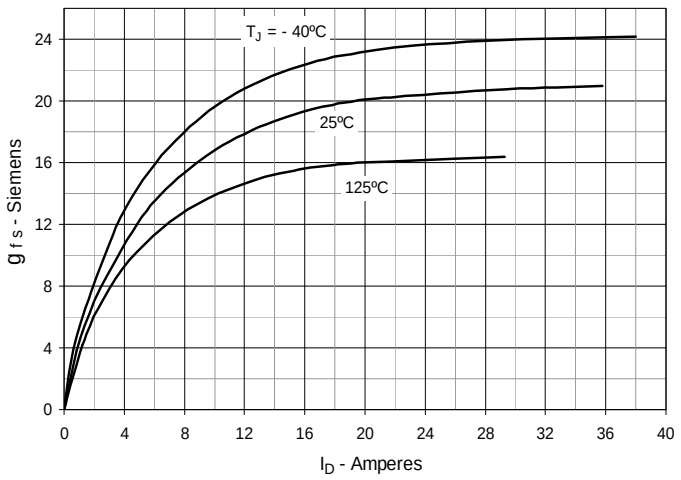

Fig. 9. Forward Voltage Drop of Intrinsic Diode

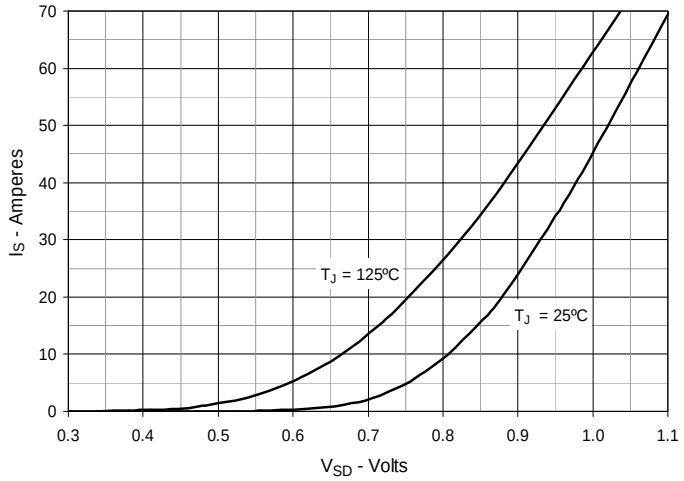

Fig. 10. Gate Charge

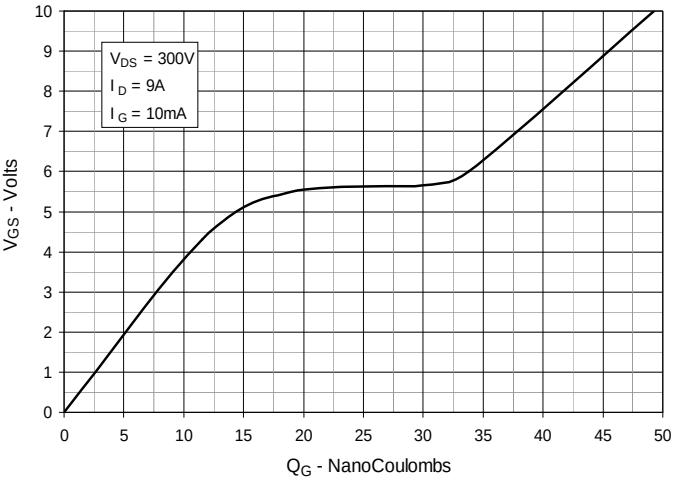

Fig. 11. Capacitance

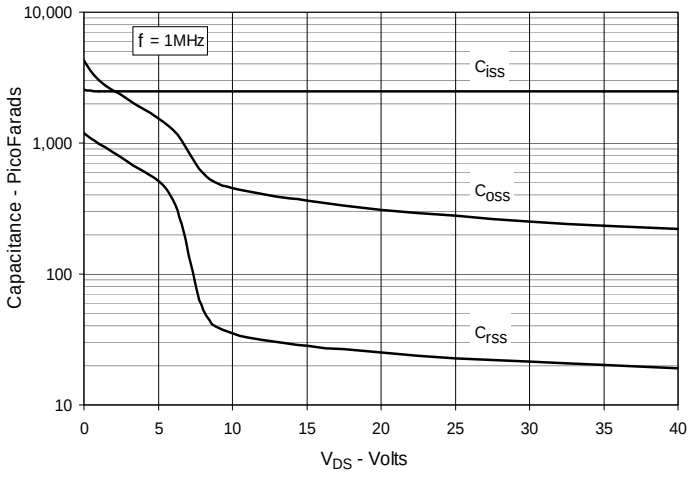

Fig. 12. Maximum Transient Thermal Impedance

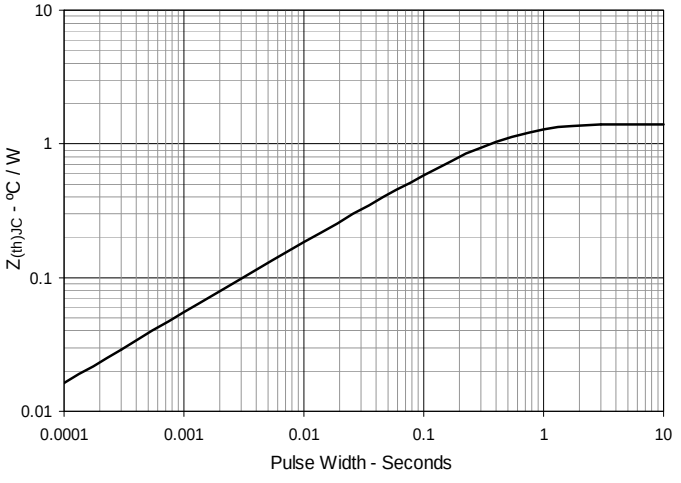

IXYS Reserves the Right to Change Limits,Test Conditions, and Dimensions.