
IXYS

PolarP™ Power MOSFET


IXTT20P50P
IXTH20P50P

V_{DSS} = - 500V
I_{D25} = - 20A
$R_{DS(on)}$ ≤ 450mΩ


P-Channel Enhancement Mode
Avalanche Rated



TO-268 (IXTT)



TO-247 (IXTH)



G = Gate D = Drain
S = Source Tab = Drain

Symbol	Test Conditions	Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C	- 500	V
V_{DGR}	T_J = 25°C to 150°C, R_{GS} = 1MΩ	- 500	V
V_{GSS}	Continuous	±20	V
V_{GSM}	Transient	±30	V
I_{D25}	T_C = 25°C	- 20	A
I_{DM}	T_C = 25°C, Pulse Width Limited by T_{JM}	- 60	A
I_A	T_C = 25°C	- 20	A
E_{AS}	T_C = 25°C	2.5	J
dv/dt	$I_S \le I_{DM}$, $V_{DD} \le V_{DSS}$, $T_J \le 150°C$	10	V/ns
P_D	T_C = 25°C	460	W
T_J		- 55 ... +150	°C
T_{JM}		150	°C
T_{stg}		- 55 ... +150	°C
T_L	Maximum Lead Temperature for Soldering	300	°C
T_{SOLD}	1.6 mm (0.062in.) from Case for 10s	260	°C
M_d	Mounting Torque (TO-247)	1.13 / 10	Nm/lb.in.
Weight	TO-268	4	g
	TO-247	6	g

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
BV_{DSS}	V_{GS} = 0V, I_D = - 250 μA	- 500			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = - 250μA	- 2.0		- 4.5	V
I_{GSS}	V_{GS} = ±20V, V_{DS} = 0V			±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$, V_{GS} = 0V			- 25	μA
	T_J = 125°C			- 200	μA
$R_{DS(on)}$	V_{GS} = -10V, $I_D = 0.5 \bullet I_{D25}$, Note 1			450	mΩ

Features

- International Standard Packages
- Avalanche Rated
- Rugged PolarP™ Process
- Low Package Inductance
- Fast Intrinsic Diode

Advantages

- Easy to Mount
- Space Savings
- High Power Density

Applications

- High-Side Switches
- Push Pull Amplifiers
- DC Choppers
- Automatic Test Equipment
- Current Regulators

© 2016 IXYS CORPORATION, All Rights Reserved

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
g_{fs}	V_{DS} = -10V, I_D = 0.5 • I_{D25}, Note 1	11	18		S
C_{iss}	V_{GS} = 0V, V_{DS} = - 25V, f = 1MHz		5120		pF
C_{oss}			525		pF
C_{rss}			75		pF
$t_{d(on)}$	**Resistive Switching Times**		26		ns
t_r	V_{GS} = -10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		32		ns
$t_{d(off)}$	R_G = 3Ω (External)		80		ns
t_f			34		ns
$Q_{g(on)}$	V_{GS} = -10V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		103		nC
Q_{gs}			28		nC
Q_{gd}			38		nC
R_{thJC}				0.27	°C/W
R_{thCS}			0.21		°C/W

Source-Drain Diode

Symbol	Test Conditions (T_J = 25°C, Unless Otherwise Specified)	Characteristic Values Min.	Typ.	Max.	
I_S	V_{GS} = 0V			- 20	A
I_{SM}	Repetitive, Pulse Width Limited by T_{JM}			- 80	A
V_{SD}	I_F = -10A, V_{GS} = 0V, Note 1			- 2.8	V
t_{rr}	I_F = -10A, -di/dt = -150A/μs		406		ns
Q_{RM}	V_R = -100V, V_{GS} = 0V		8.93		μC
I_{RM}			- 44		A

Note 1: Pulse test, t ≤ 300μs, duty cycle, d ≤ 2%.

IXYS Reserves The Right to Change Limits, Test Conditions, and Dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,860,072 4,881,106 4,931,844 5,017,508 5,034,796 5,049,961 5,063,307 5,187,117 5,237,481 5,381,025 5,486,715 6,162,665 6,259,123 B1 6,306,728 B1 6,404,065 B1 6,534,343 6,583,505 6,683,344 6,710,405 B2 6,710,463 6,727,585 6,759,692 6,771,478 B2 7,005,734 B2 7,063,975 B2 7,071,537 7,157,338B2

Fig. 1. Output Characteristics @ T_J = 25ºC

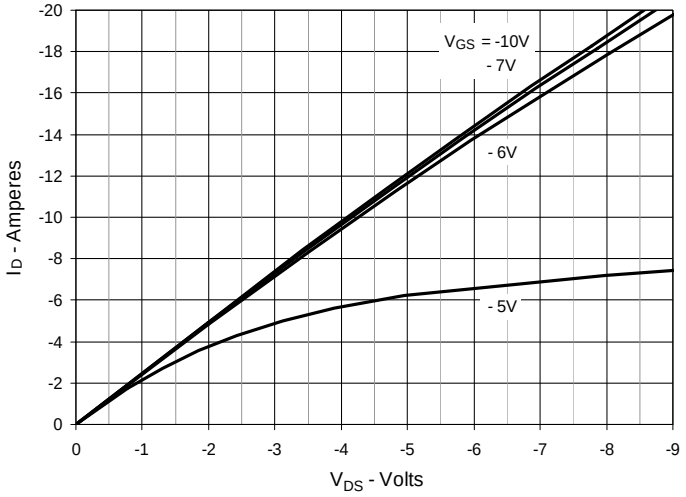


Fig. 2. Extended Output Characteristics @ T_J = 25ºC

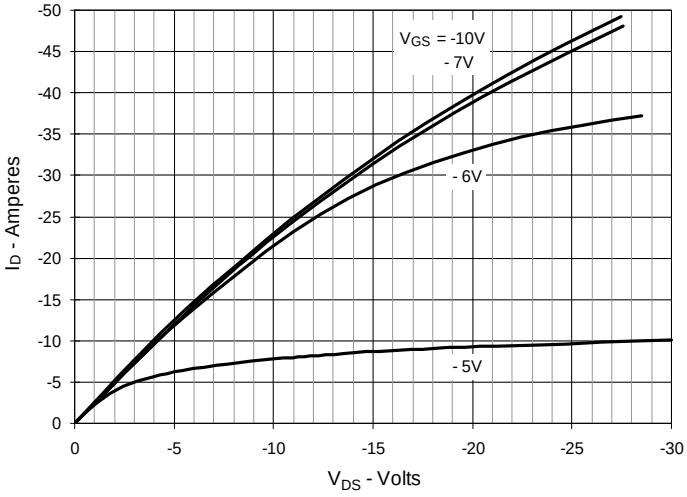


Fig. 3. Output Characteristics @ T_J = 125ºC

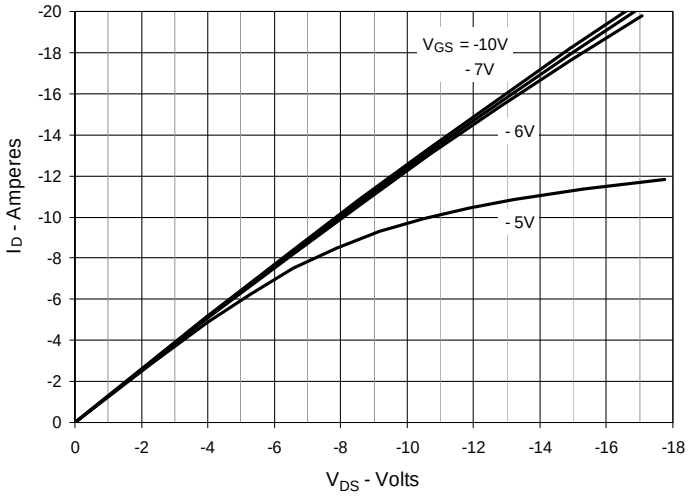


Fig. 4. $R_{DS(on)}$ Normalized to I_D = -10A Value vs. Junction Temperature

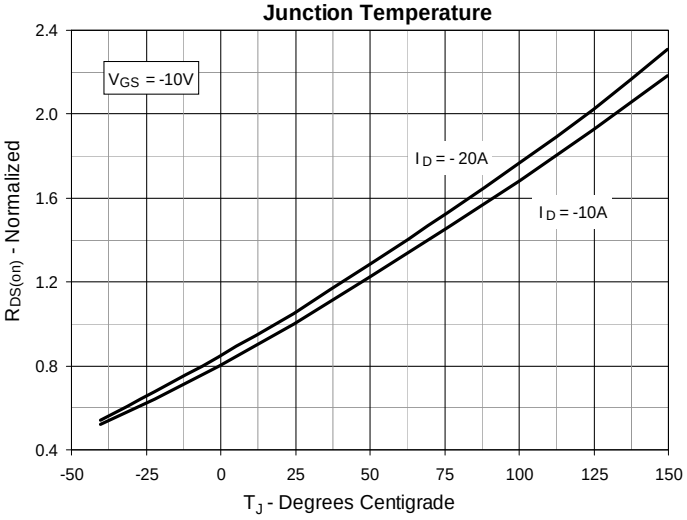


Fig. 5. $R_{DS(on)}$ Normalized to I_D = -10A Value vs. Drain Current


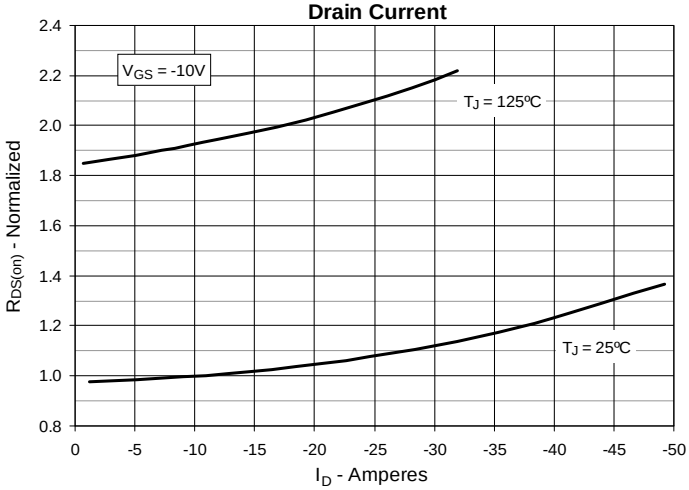


Fig. 6. Maximum Drain Current vs. Case Temperature

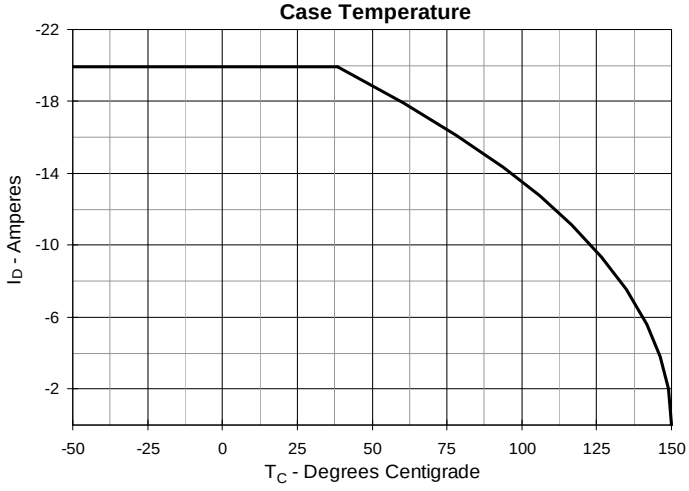

© 2016 IXYS CORPORATION, All Rights Reserved

Fig. 7. Input Admittance

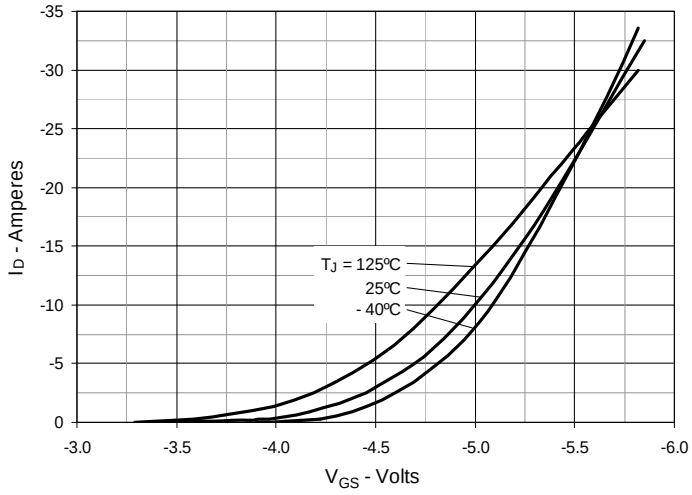


Fig. 8. Transconductance

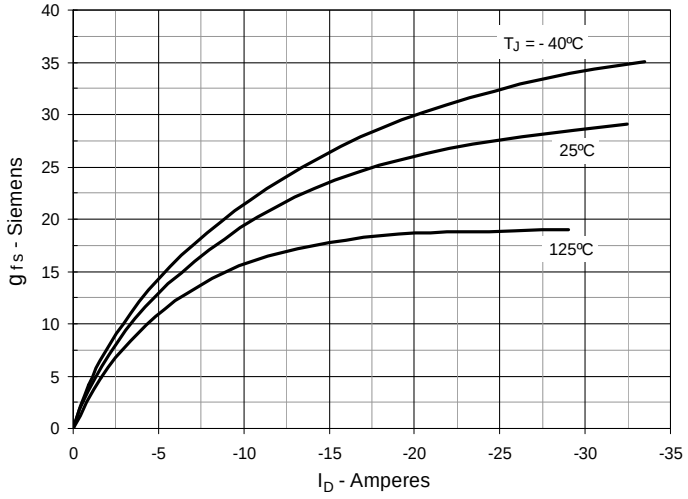


Fig. 9. Forward Voltage Drop of Intrinsic Diode

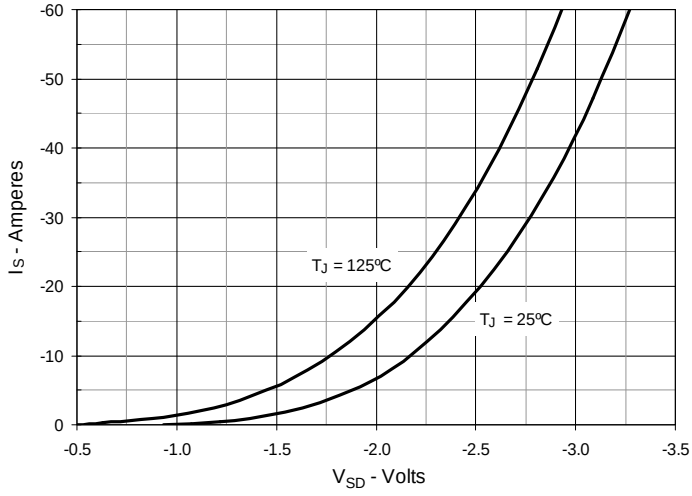


Fig. 10. Gate Charge

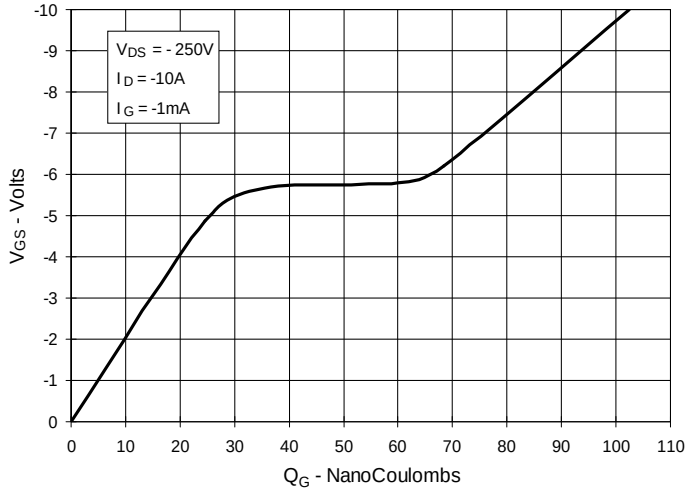


Fig. 11. Capacitance

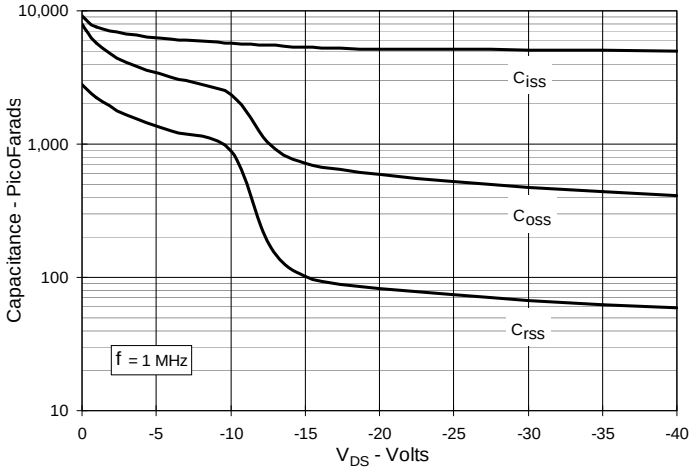


Fig. 12. Forward-Bias Safe Operating Area



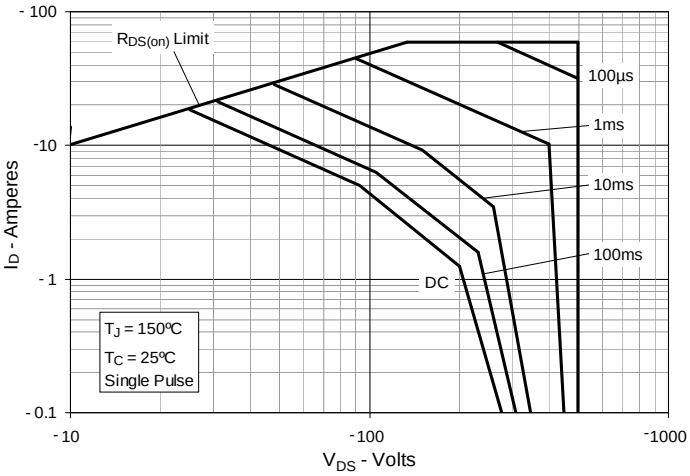


Fig. 13. Maximum Transient Thermal Impedance

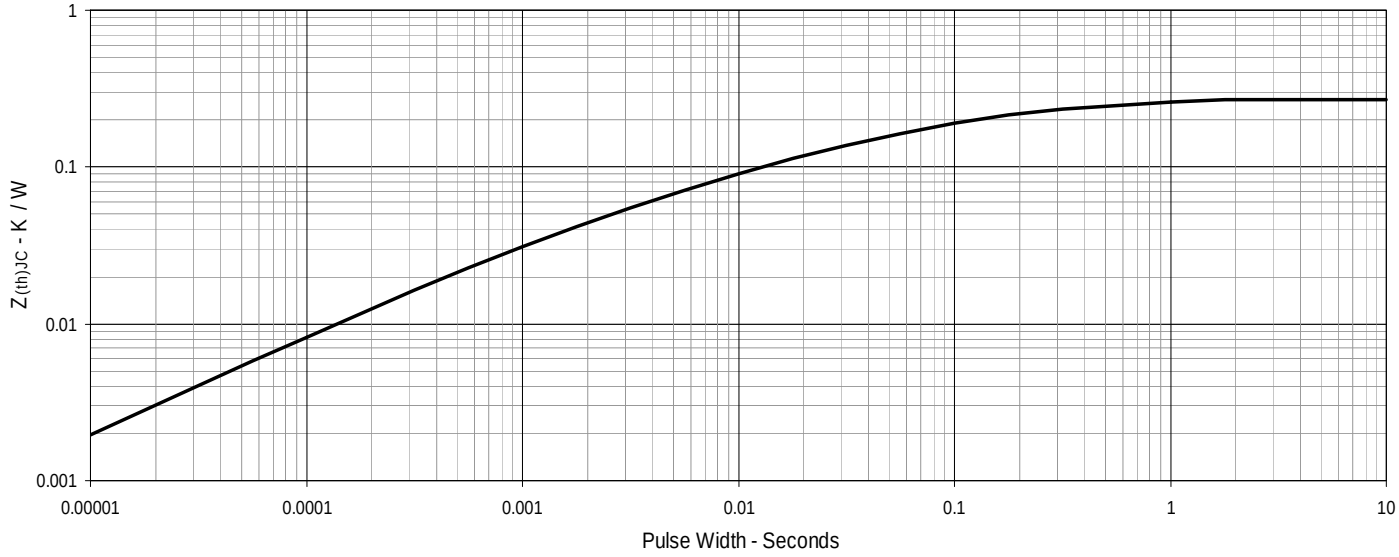


TO-268 OUTLINE

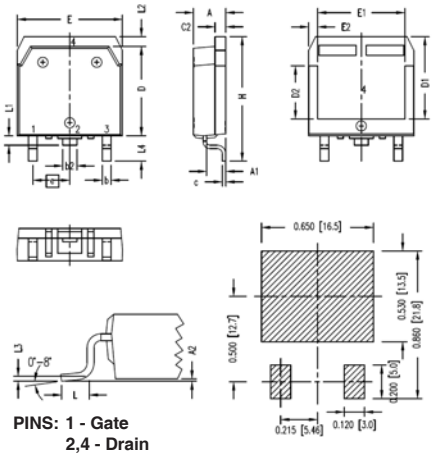

PINS: 1 - Gate
2,4 - Drain
3 - Source

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.193	.201	4.90	5.10
A1	.106	.114	2.70	2.90
A2	.001	.010	0.02	0.25
b	.045	.057	1.15	1.45
b2	.075	.083	1.90	2.10
C	.016	.026	0.40	0.65
C2	.057	.063	1.45	1.60
D	.543	.551	13.80	14.00
D1	.488	.500	12.40	12.70
D2	.320	.335	8.13	8.50
E	.624	.632	15.85	16.05
E1	.524	.535	13.30	13.60
E2	.045	.055	1.14	1.39
e	.215 BSC		5.45 BSC	
H	.736	.752	18.70	19.10
L	.094	.106	2.40	2.70
L1	.047	.055	1.20	1.40
L2	.039	.045	1.00	1.15
L3	.010 BSC		0.25 BSC	
L4	.150	.161	3.80	4.10

TO-247 OUTLINE

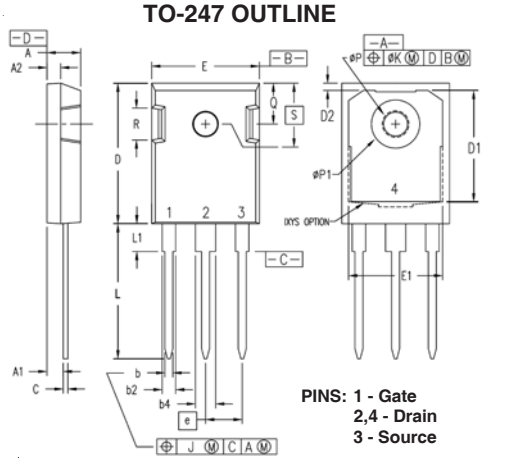

PINS: 1 - Gate
2,4 - Drain
3 - Source

SYM	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	.190	.205	4.83	5.21
A1	.090	.100	2.29	2.54
A2	.075	.085	1.91	2.16
b	.045	.055	1.14	1.40
b2	.075	.087	1.91	2.20
b4	.115	.126	2.92	3.20
C	.024	.031	0.61	0.80
D	.819	.840	20.80	21.34
D1	.650	.690	16.51	17.53
D2	.035	.050	0.89	1.27
E	.620	.635	15.75	16.13
E1	.545	.565	13.84	14.35
e	.215 BSC		5.45 BSC	
J	--	.010	--	0.25
K	--	.025	--	0.64
L	.780	.810	19.81	20.57
L1	.150	.170	3.81	4.32
øP	.140	.144	3.55	3.65
øP1	.275	.290	6.99	7.37
Q	.220	.244	5.59	6.20
R	.170	.190	4.32	4.83
S	.242 BSC		6.15 BSC	

© 2016 IXYS CORPORATION, All Rights Reserved



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.