ADVANCED POWER TECHNOLOGY®

600V
APT100GN60B2
APT100GN60B2G*

***G Denotes RoHS Compliant, Pb Free Terminal Finish.**

Utilizing the latest Field Stop and Trench Gate technologies, these IGBT's have ultra low $V_{CE(ON)}$ and are ideal for low frequency applications that require absolute minimum conduction loss. Easy paralleling is a result of very tight parameter distribution and a slightly positive $V_{CE(ON)}$ temperature coefficient. A built-in gate resistor ensures extremely reliable operation, even in the event of a short circuit fault. Low gate charge simplifies gate drive design and minimizes losses.



- **600V Field Stop**
- **Trench Gate: Low $V_{CE(on)}$**
- **Easy Paralleling**
- **6µs Short Circuit Capability**
- **Intergrated Gate Resistor: Low EMI, High Reliability**



Applications: Welding, Inductive Heating, Solar Inverters, SMPS, Motor drives, UPS

MAXIMUM RATINGS

All Ratings: T_C = 25°C unless otherwise specified.

Symbol	Parameter	APT100GN60B2(G)	UNIT
V_{CES}	Collector-Emitter Voltage	600	Volts
V_{GE}	Gate-Emitter Voltage	±30	
I_{C1}	Continuous Collector Current ⑧ @ T_C = 25°C	229	Amps
I_{C2}	Continuous Collector Current ⑧ @ T_C = 110°C	135	
I_{CM}	Pulsed Collector Current ①	300	
SSOA	Switching Safe Operating Area @ T_J = 175°C	300A @ 600V	
P_D	Total Power Dissipation	625	Watts
T_J,T_{STG}	Operating and Storage Junction Temperature Range	-55 to 175	°C
T_L	Max. Lead Temp. for Soldering: 0.063" from Case for 10 Sec.	300	

STATIC ELECTRICAL CHARACTERISTICS

Symbol	Characteristic / Test Conditions	MIN	TYP	MAX	Units
$V_{(BR)CES}$	Collector-Emitter Breakdown Voltage (V_{GE} = 0V, I_C = 4mA)	600			Volts
$V_{GE(TH)}$	Gate Threshold Voltage (V_{CE} = V_{GE}, I_C = 1mA, T_j = 25°C)	5.0	5.8	6.5	
$V_{CE(ON)}$	Collector-Emitter On Voltage (V_{GE} = 15V, I_C = 100A, T_j = 25°C)	1.05	1.45	1.85	
	Collector-Emitter On Voltage (V_{GE} = 15V, I_C = 100A, T_j = 125°C)		1.87		
I_{CES}	Collector Cut-off Current (V_{CE} = 600V, V_{GE} = 0V, T_j = 25°C) ②			25	µA
	Collector Cut-off Current (V_{CE} = 600V, V_{GE} = 0V, T_j = 125°C) ②			TBD	
I_{GES}	Gate-Emitter Leakage Current (V_{GE} = ±20V)			600	nA
$R_{G(int)}$	Intergrated Gate Resistor		2		Ω

CAUTION: These Devices are Sensitive to Electrostatic Discharge. Proper Handling Procedures Should Be Followed.

APT Website - http://www.advancedpower.com

050-7621 Rev A 10-2005

DYNAMIC CHARACTERISTICS

APT100GN60B2(G)

Symbol	Characteristic	Test Conditions	MIN	TYP	MAX	UNIT
C_{ies}	Input Capacitance	**Capacitance**		6000		pF
C_{oes}	Output Capacitance	V_{GE} = 0V, V_{CE} = 25V		560		
C_{res}	Reverse Transfer Capacitance	f = 1 MHz		200		
V_{GEP}	Gate-to-Emitter Plateau Voltage	Gate Charge		9.5		V
Q_g	Total Gate Charge ③	V_{GE} = 15V		600		nC
Q_{ge}	Gate-Emitter Charge	V_{CE} = 300V		45		
Q_{gc}	Gate-Collector ("Miller") Charge	I_C = 100A		340		
SSOA	Switching Safe Operating Area	T_J = 175°C, R_G = 4.3Ω⑦, V_{GE} = 15V, L = 100µH, V_{CE} = 600V	300			A
SCSOA	Short Circuit Safe Operating Area	V_{CC} = 600V, V_{GE} = 15V, T_J = 125°C, R_G = 4.3Ω⑦	6			µs
$t_{d(on)}$	Turn-on Delay Time	**Inductive Switching (25°C)**		31		ns
t_r	Current Rise Time	V_{CC} = 400V		65		
$t_{d(off)}$	Turn-off Delay Time	V_{GE} = 15V		310		
t_f	Current Fall Time	I_C = 100A		55		
E_{on1}	Turn-on Switching Energy ④	R_G = 1.0Ω⑦		4750		µJ
E_{on2}	Turn-on Switching Energy (Diode) ⑤	T_J = +25°C		5095		
E_{off}	Turn-off Switching Energy ⑥			2675		
$t_{d(on)}$	Turn-on Delay Time	**Inductive Switching (125°C)**		31		ns
t_r	Current Rise Time	V_{CC} = 400V		65		
$t_{d(off)}$	Turn-off Delay Time	V_{GE} = 15V		350		
t_f	Current Fall Time	I_C = 100A		85		
E_{on1}	Turn-on Switching Energy ④	R_G = 1.0Ω⑦		5000		µJ
E_{on2}	Turn-on Switching Energy (Diode) ⑤	T_J = +125°C		6255		
E_{off}	Turn-off Switching Energy ⑥			3300		

THERMAL AND MECHANICAL CHARACTERISTICS

Symbol	Characteristic	MIN	TYP	MAX	UNIT
$R_{\theta JC}$	Junction to Case **(IGBT)**			.21	°C/W
$R_{\theta JC}$	Junction to Case **(DIODE)**			N/A	
W_T	Package Weight		5.9		gm

① Repetitive Rating: Pulse width limited by maximum junction temperature.

② For Combi devices, I_{ces} includes both IGBT and FRED leakages

③ See MIL-STD-750 Method 3471.

④ E_{on1} is the clamped inductive turn-on energy of the IGBT only, without the effect of a commutating diode reverse recovery current adding to the IGBT turn-on loss. Tested in inductive switching test circuit shown in figure 21, but with a Silicon Carbide diode.

⑤ E_{on2} is the clamped inductive turn-on energy that includes a commutating diode reverse recovery current in the IGBT turn-on switching loss. (See Figures 21, 22.)

⑥ E_{off} is the clamped inductive turn-off energy measured in accordance with JEDEC standard JESD24-1. (See Figures 21, 23.)

⑦ R_G is external gate resistance, not including $R_{G(int)}$ nor gate driver impedance. (MIC4452)

⑧ Continuous current limited by package pin temperature to 100A.

APT Reserves the right to change, without notice, the specifications and information contained herein.

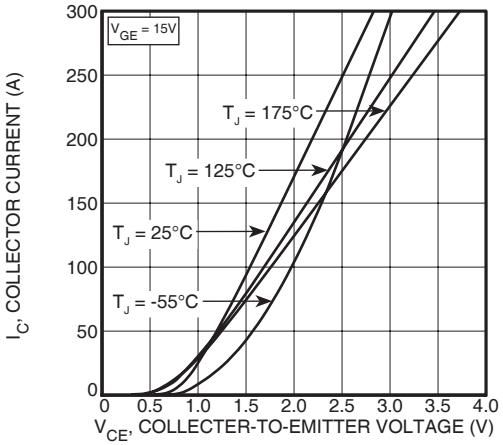

FIGURE 1, Output Characteristics(T_J = 25°C)

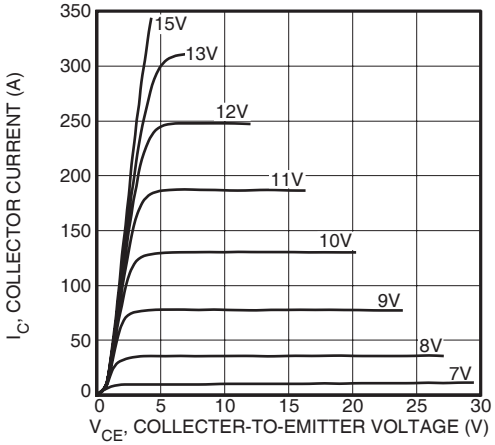

FIGURE 2, Output Characteristics (T_J = 125°C)

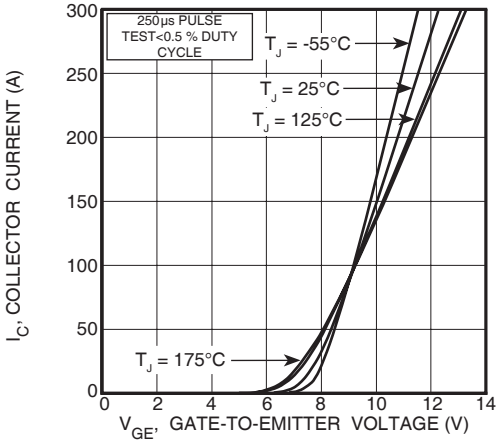

FIGURE 3, Transfer Characteristics

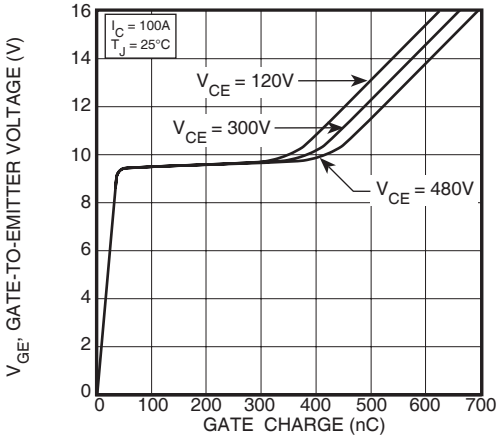

FIGURE 4, Gate Charge

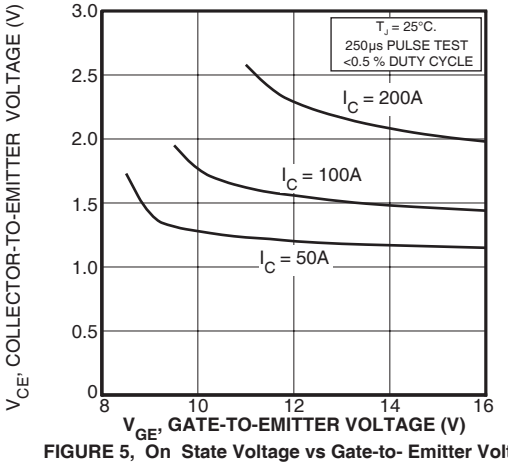

FIGURE 5, On State Voltage vs Gate-to- Emitter Voltage

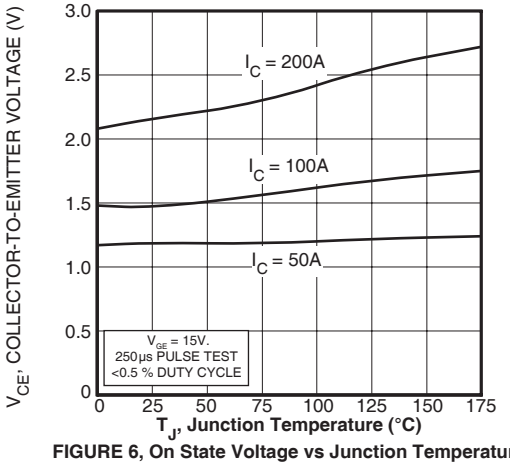

FIGURE 6, On State Voltage vs Junction Temperature

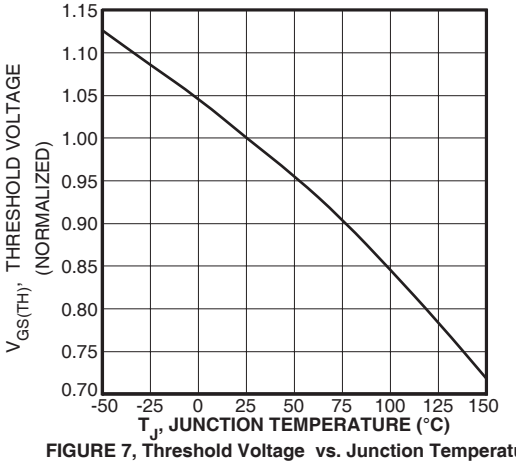

FIGURE 7, Threshold Voltage vs. Junction Temperature

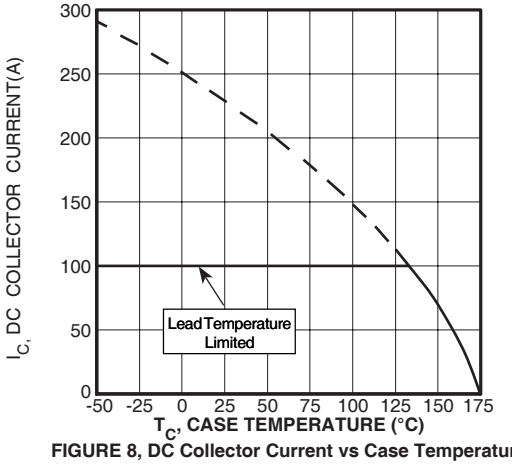

FIGURE 8, DC Collector Current vs Case Temperature

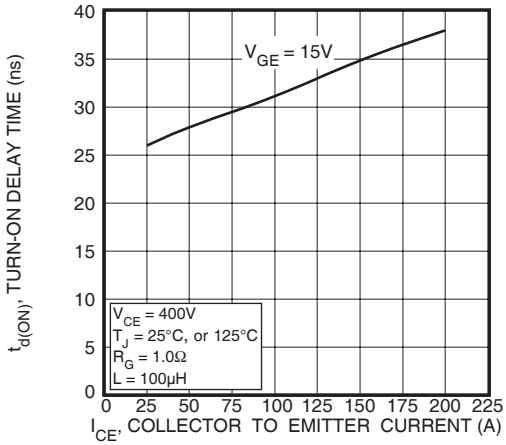

FIGURE 9, Turn-On Delay Time vs Collector Current

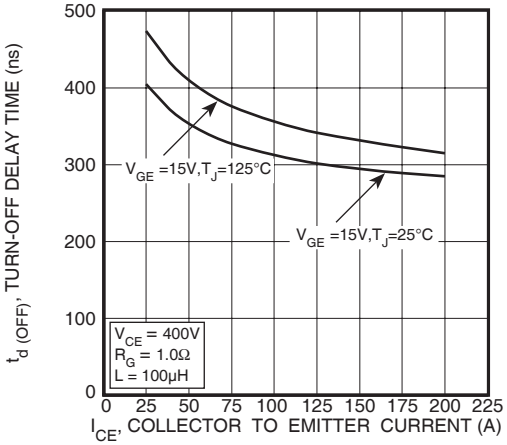

FIGURE 10, Turn-Off Delay Time vs Collector Current

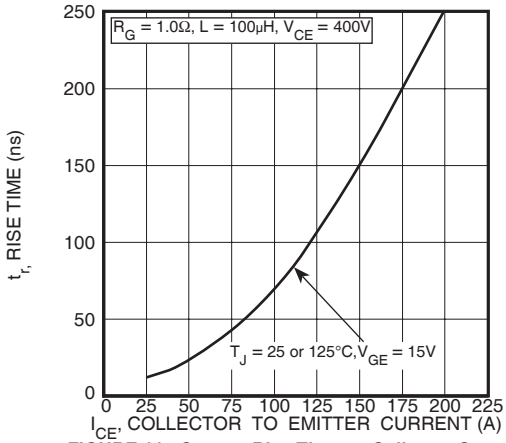

FIGURE 11, Current Rise Time vs Collector Current

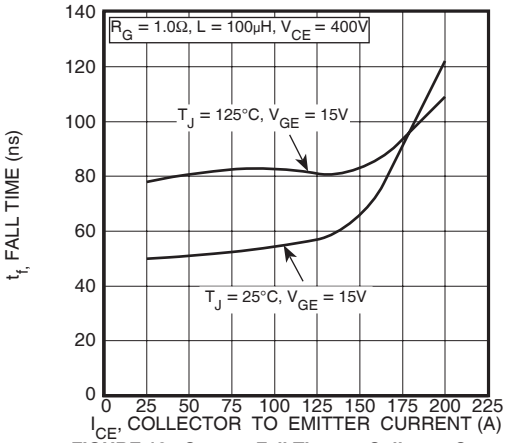

FIGURE 12, Current Fall Time vs Collector Current

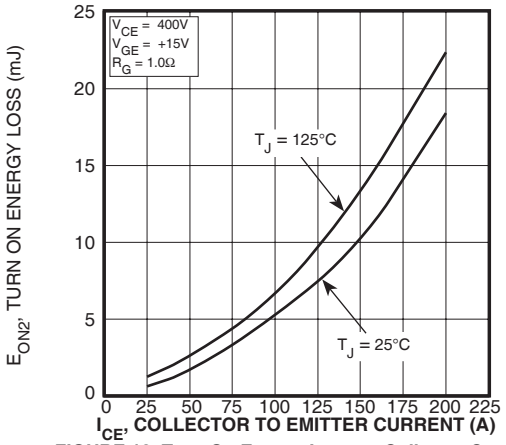

FIGURE 13, Turn-On Energy Loss vs Collector Current

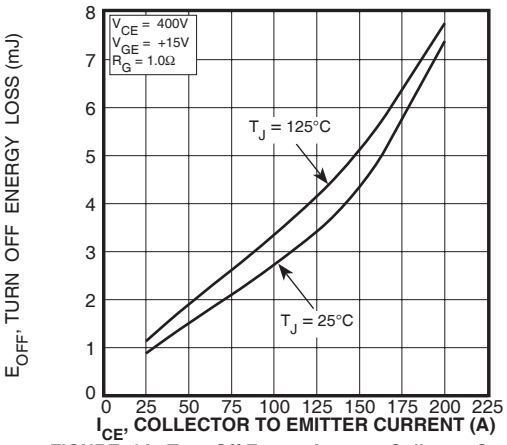

FIGURE 14, Turn Off Energy Loss vs Collector Current

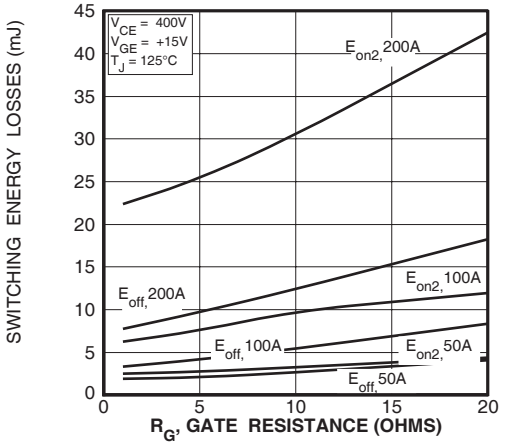

FIGURE 15, Switching Energy Losses vs. Gate Resistance

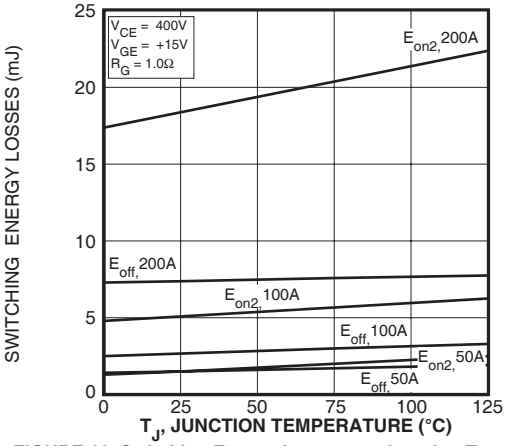

FIGURE 16, Switching Energy Losses vs Junction Temperature

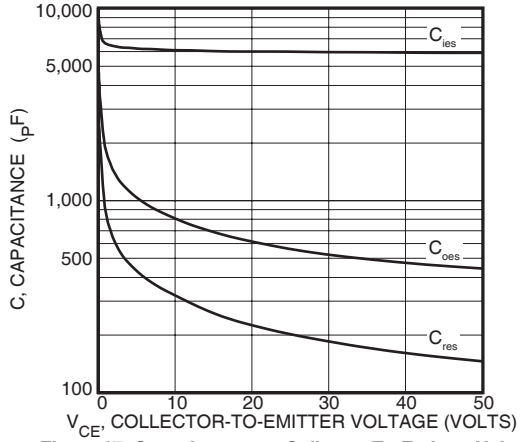

Figure 17, Capacitance vs Collector-To-Emitter Voltage

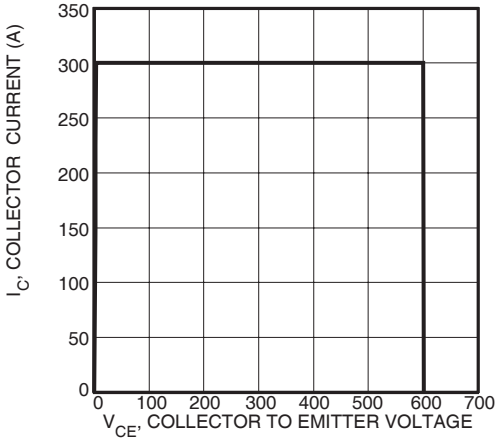

Figure 18,Minimim Switching Safe Operating Area

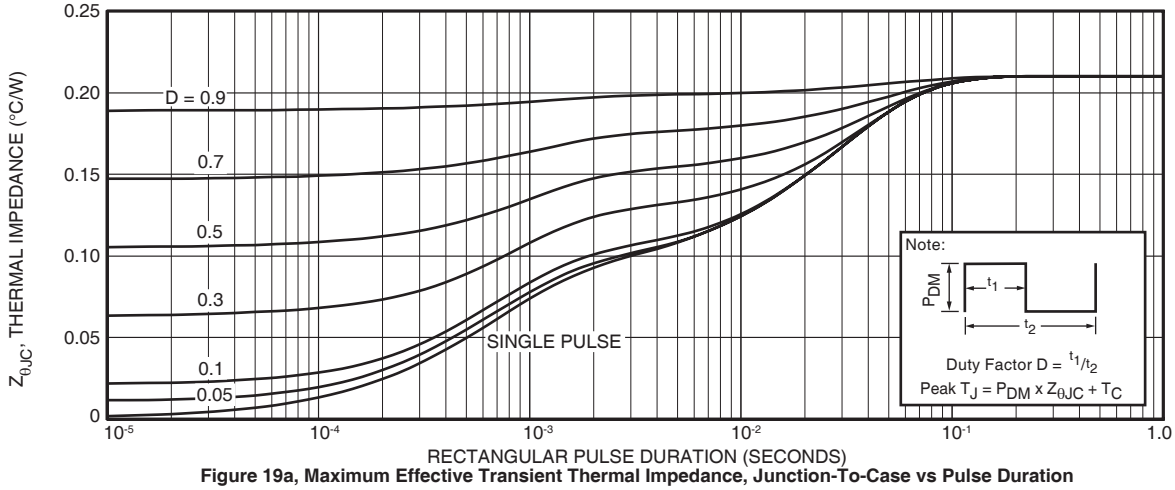

Figure 19a, Maximum Effective Transient Thermal Impedance, Junction-To-Case vs Pulse Duration

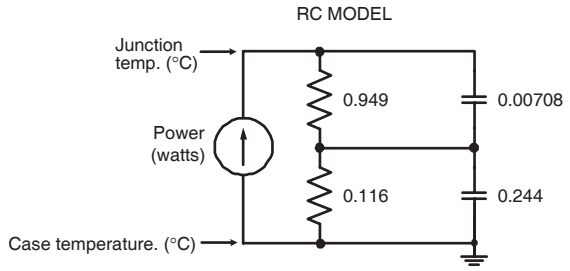

FIGURE 19b, TRANSIENT THERMAL IMPEDANCE MODEL

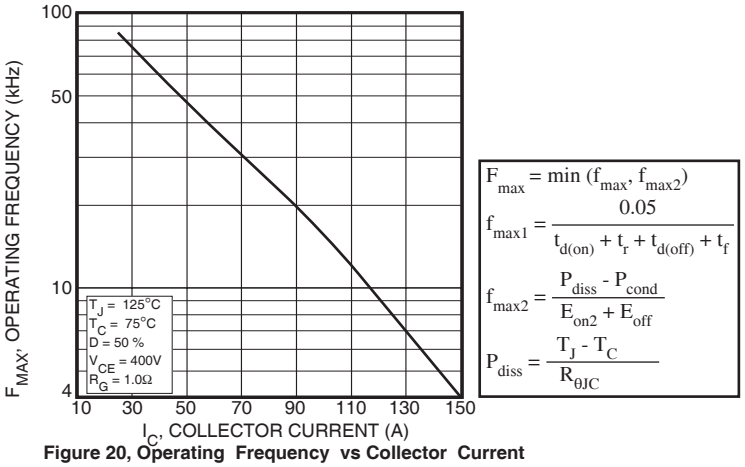

Figure 20, Operating Frequency vs Collector Current

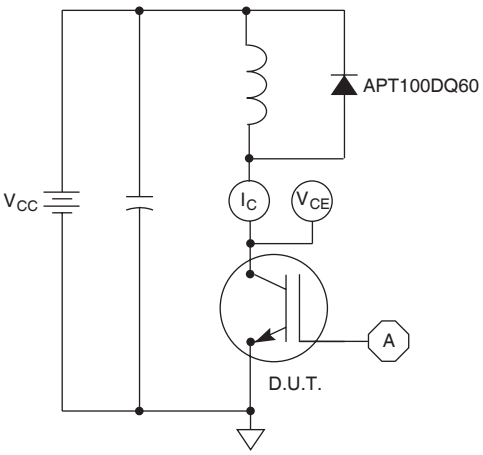

Figure 21, Inductive Switching Test Circuit

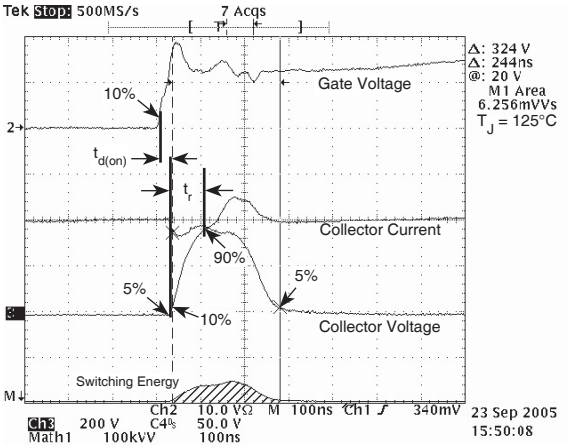

Figure 22, Turn-on Switching Waveforms and Definitions

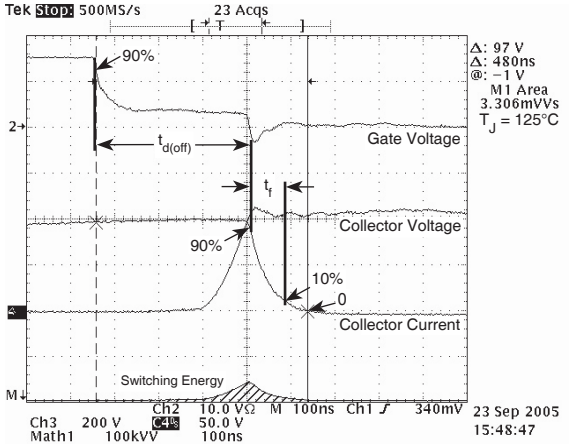

Figure 23, Turn-off Switching Waveforms and Definitions

T-MAX® (B2) Package Outline

(e1) SAC: Tin, Silver, Copper

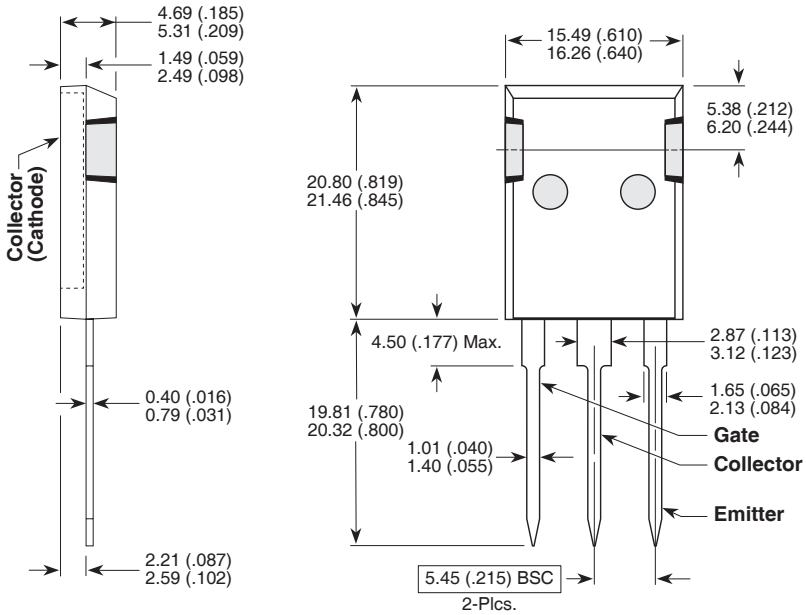

Dimensions in Millimeters and (Inches)