

A1P50S65M2

Datasheet

ACEPACK™ 1 sixpack topology, 650 V, 50 A, trench gate field-stop M series IGBT with soft diode and NTC

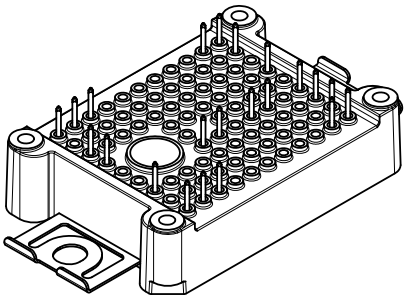

ACEPACK™ 1

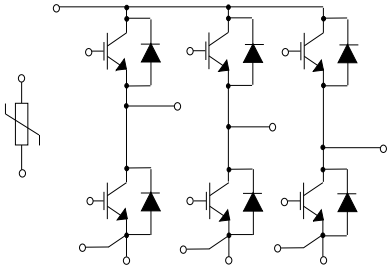

Features

- ACEPACK™ 1 power module
  - DBC Cu Al_2O_3 Cu
- Sixpack topology
  - 650 V, 50 A IGBTs and diodes
  - Soft and fast recovery diode
- Integrated NTC

Applications

- Inverters
- Industrial
- Motor drives

Description

This power module is a sixpack topology in an ACEPACK™ 1 package with NTC, integrating the advanced trench gate field-stop technologies from STMicroelectronics. This new IGBT technology represents the best compromise between conduction and switching loss, to maximize the efficiency of any converter system up to 20 kHz.

Product status
A1P50S65M2

Product summary	
Order code	A1P50S65M2
Marking	A1P50S65M2
Package	ACEPACK™ 1
Leads type	Solder contact pins

1 Electrical ratings

1.1 IGBT

Limiting values at T_J = 25 °C, unless otherwise specified.

Table 1. Absolute maximum ratings of the IGBT

Symbol	Parameter	Value	Unit
V_{CES}	Collector-emitter voltage (V_{GE} = 0 V)	650	V
I_C	Continuous collector current (T_C = 100 °C)	50	A
I_{CP}(1)	Pulsed collector current (t_p = 1 ms)	100	A
V_{GE}	Gate-emitter voltage	±20	V
P_{TOT}	Total power dissipation of each IGBT (T_C = 25 °C, T_J = 175 °C)	208	W
T_{JMAX}	Maximum junction temperature	175	°C
T_{Jop}	Operating junction temperature range under switching conditions	-40 to 150	°C

1. *Pulse width limited by maximum junction temperature.*

Table 2. Electrical characteristics of the IGBT

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$V_{(BR)CES}$	Collector-emitter breakdown voltage	I_C = 1 mA, V_{GE} = 0 V	650			V
$V_{CE(sat)}$ (terminal)	Collector-emitter saturation voltage	V_{GE} = 15 V, I_C= 50 A		1.95	2.3	V
		V_{GE} = 15 V, I_C = 50 A, T_J = 150 °C		2.3		
$V_{GE(th)}$	Gate threshold voltage	V_{CE} = V_{GE}, I_C = 1 mA	5	6	7	V
I_{CES}	Collector cut-off current	V_{GE} = 0 V, V_{CE} = 650 V			100	µA
I_{GES}	Gate-emitter leakage current	V_{CE} = 0 V, V_{GE} = ± 20 V			± 500	nA
C_{ies}	Input capacitance	V_{CE} = 25 V, f = 1 MHz, V_{GE} = 0 V		4150		pF
C_{oes}	Output capacitance			170		pF
C_{res}	Reverse transfer capacitance			80		pF
Q_g	Total gate charge	V_{CC} = 520 V, I_C = 50 A, V_{GE} = ±15 V		150		nC
$t_{d(on)}$	Turn-on delay time	V_{CC} = 300 V, I_C = 50 A, R_G = 6.8 Ω, V_{GE} = ±15 V, di/dt = 2400 A/µs		143		ns
t_r	Current rise time			16.5		ns
E_{on}(1)	Turn-on switching energy			0.140		mJ
$t_{d(off)}$	Turn-off delay time	V_{CC} = 300 V, I_C = 50 A, R_G = 6.8 Ω, V_{GE} = ±15 V, dv/dt = 7600 V/µs		112		ns
t_f	Current fall time			149		ns
E_{off}(2)	Turn-off switching energy			1.45		mJ

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
$t_{d(on)}$	Turn-on delay time	V_{CC} = 300 V, I_C = 50 A,		148		ns
t_r	Current rise time	R_G = 6.8 Ω, V_{GE} = ±15 V,		19.2		ns
E_{on} (1)	Turn-on switching energy	di/dt = 2062 A/µs, T_J = 150 °C		0.311		mJ
$t_{d(off)}$	Turn-off delay time	V_{CC} = 300 V, I_C = 50 A,		110		ns
t_f	Current fall time	R_G = 6.8 Ω, V_{GE} = ±15 V,		221		ns
E_{off} (2)	Turn-off switching energy	dv/dt = 5800 V/µs, T_J = 150 °C		1.98		mJ
t_{SC}	Short-circuit withstand time	V_{CC} ≤ 360 V, V_{GE} ≤ 15 V, T_{Jstart} ≤ 150 °C	6			µs
R_{THj-c}	Thermal resistance junction-to-case	Each IGBT		0.65	0.72	°C/W
R_{THc-h}	Thermal resistance case-to-heatsink	Each IGBT, λ_{grease} = 1 W/(m·°C)		0.79		°C/W

1. *Including the reverse recovery of the diode.*
2. *Including the tail of the collector current.*

1.2 Diode

Limiting values at T_J = 25 °C, unless otherwise specified.

Table 3. Absolute maximum ratings of the diode

Symbol	Parameter	Value	Unit
V_{RRM}	Repetitive peak reverse voltage	650	V
I_F	Continuous forward current at (T_C = 100 °C)	50	A
I_{FP} (1)	Pulsed forward current (t_p = 1 ms)	100	A
T_{JMAX}	Maximum junction temperature	175	°C
T_{Jop}	Operating junction temperature range under switching conditions	-40 to 150	°C

1. *Pulse width limited by maximum junction temperature.*

Table 4. Electrical characteristics of the diode

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
V_F (terminal)	Forward voltage	I_F = 50 A	-	1.85	2.65	V
		I_F = 50 A, T_J = 150 °C	-	1.65		
t_{rr}	Reverse recovery time	I_F = 50 A, V_R = 300 V, V_{GE} = ±15 V, di/dt = 2400 A/µs	-	142		ns
Q_{rr}	Reverse recovery charge		-	1.87		µC
I_{rrm}	Reverse recovery current		-	40		A
E_{rec}	Reverse recovery energy		-	0.41		mJ
t_{rr}	Reverse recovery time	I_F = 50 A, V_R = 300 V, V_{GE} = ±15 V, di/dt = 2062 A/µs, T_J = 150 °C	-	260		ns
Q_{rr}	Reverse recovery charge		-	5.2		µC
I_{rrm}	Reverse recovery current		-	58		A
E_{rec}	Reverse recovery energy		-	1.32		mJ

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
R_{THj-c}	Thermal resistance junction-to-case	Each diode	-	1.0	1.1	°C/W
R_{THc-h}	Thermal resistance case-to-heatsink	Each diode, λ_{grease} = 1 W/(m·°C)	-	0.9		°C/W

1.3 NTC

Table 5. NTC temperature sensor, considered as stand-alone

Symbol	Parameter	Test conditions	Min.	Typ.	Max.	Unit
R_{25}	Resistance	T = 25°C		5		kΩ
R_{100}	Resistance	T = 100°C		493		Ω
ΔR/R	Deviation of R_{100}		-5		+5	%
$B_{25/50}$	B-constant			3375		K
$B_{25/80}$	B-constant			3411		K
T	Operating temperature range		-40		150	°C

Figure 1. NTC resistance vs temperature


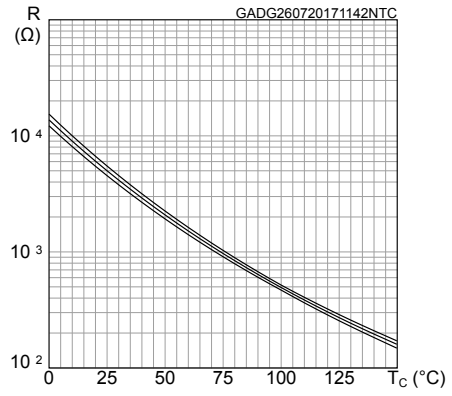


Figure 2. NTC resistance vs temperature, zoom

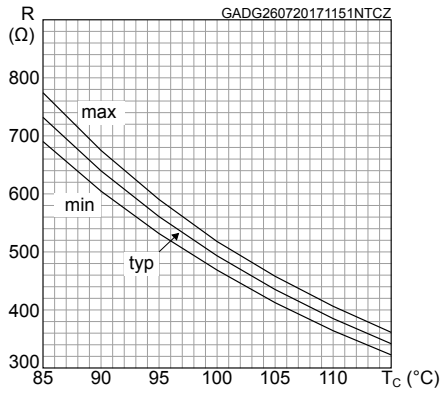

1.4 Package

Table 6. ACEPACK™ 1 package

Symbol	Parameter	Min.	Typ.	Max.	Unit
V_{isol}	Isolation voltage (AC voltage, t = 60 s)			2500	Vrms
T_{stg}	Storage temperature	-40		125	°C
CTI	Comparative tracking index	200			
L_s	Stray inductance module P1 - EW loop		28.7		nH
R_s	Module single lead resistance, terminal-to-chip		3.9		mΩ

2 Electrical characteristics (curves)

Figure 3. IGBT output characteristics (V_{GE} = 15 V, terminal)

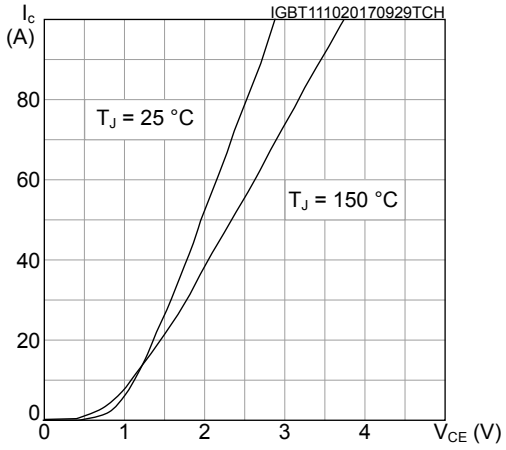


Figure 4. IGBT output characteristics (T_J = 150 °C, terminal)

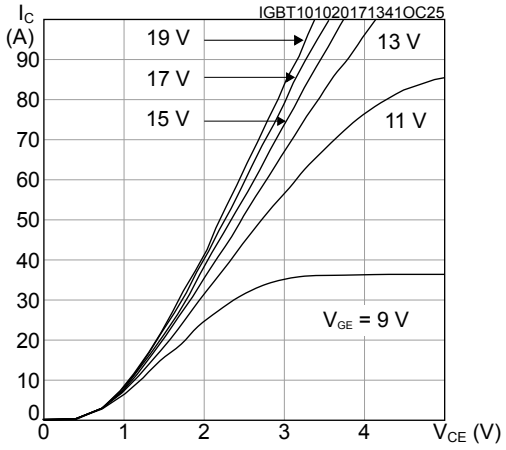


Figure 5. IGBT transfer characteristics (V_{CE} = 15 V, terminal)

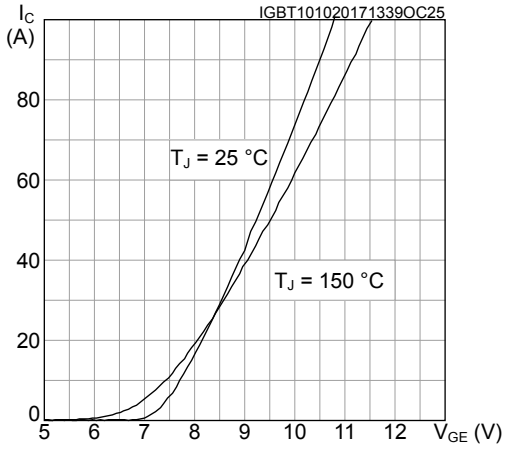


Figure 6. IGBT collector current vs case temperature

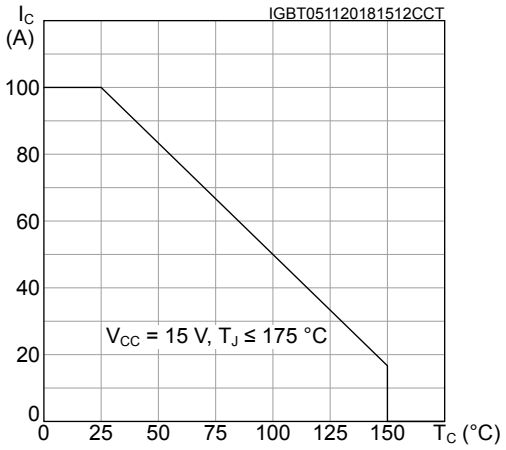


Figure 7. Switching energy vs gate resistance

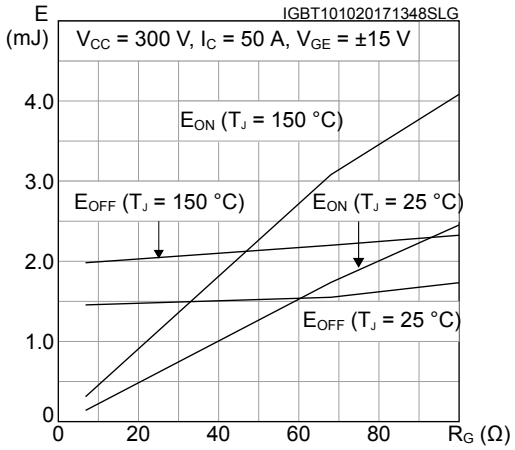


Figure 8. Switching energy vs collector current

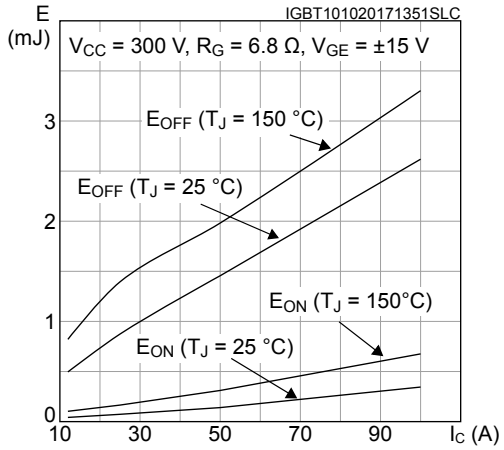


Figure 9. IGBT reverse biased safe operating area (RBSOA)

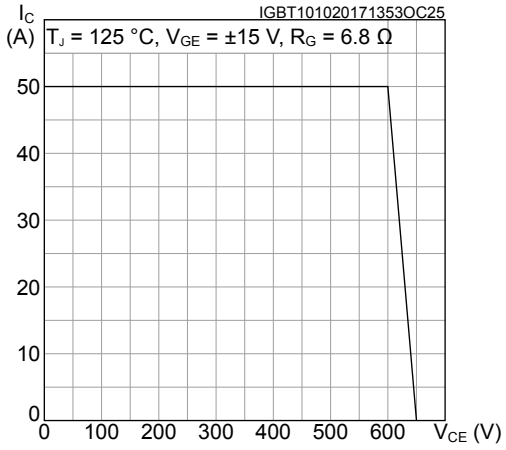


Figure 10. Diode forward characteristics

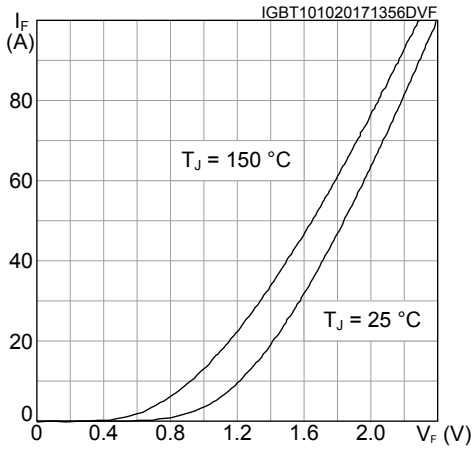


Figure 11. Diode reverse recovery energy vs diode current slope

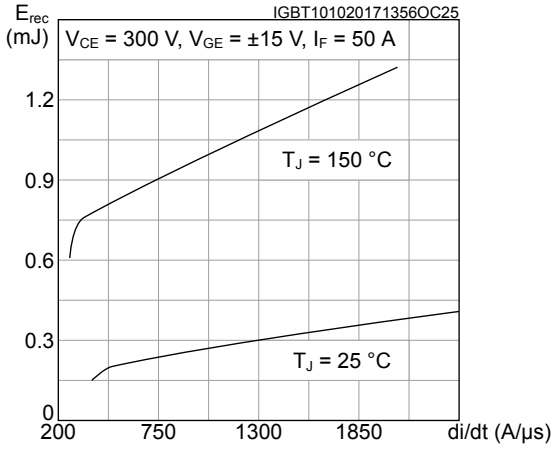


Figure 12. Diode reverse recovery energy vs forward current

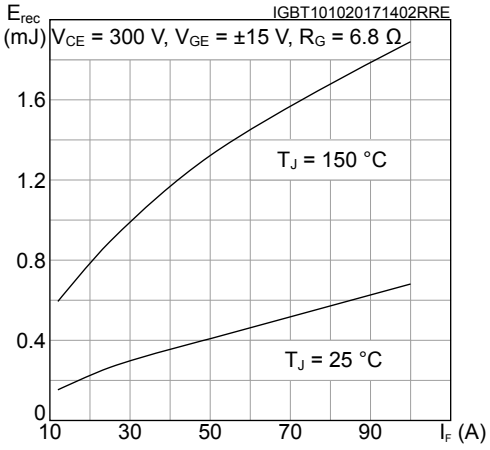


Figure 13. Diode reverse recovery energy vs gate resistance

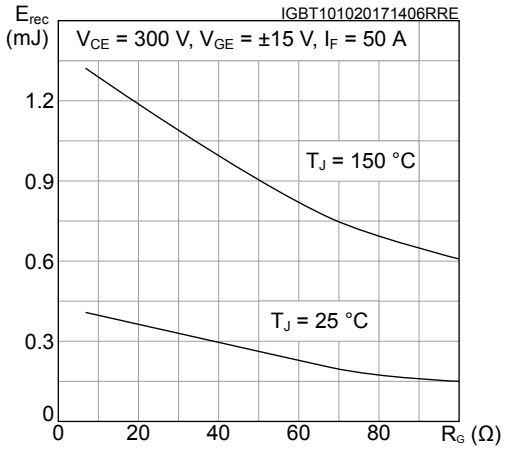


Figure 14. Inverter diode thermal impedance


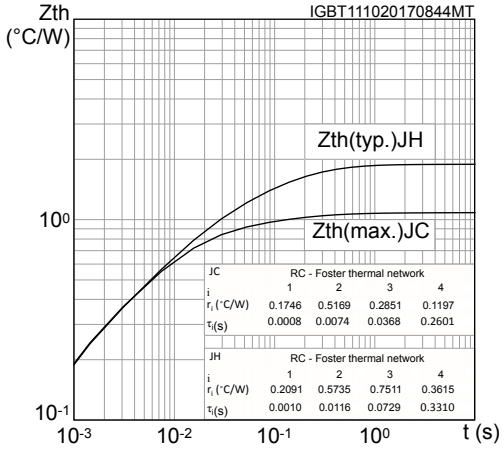


Figure 15. IGBT thermal impedance

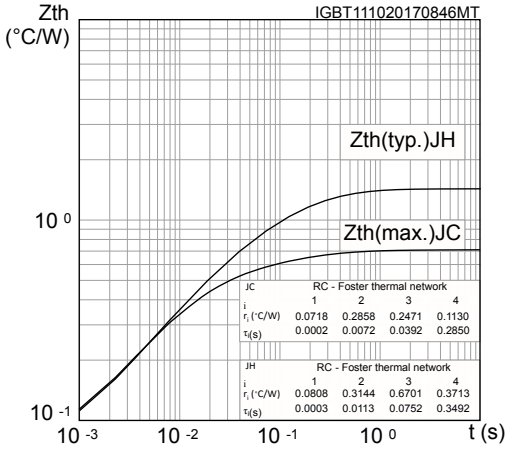

3 Test circuits

Figure 16. Test circuit for inductive load switching

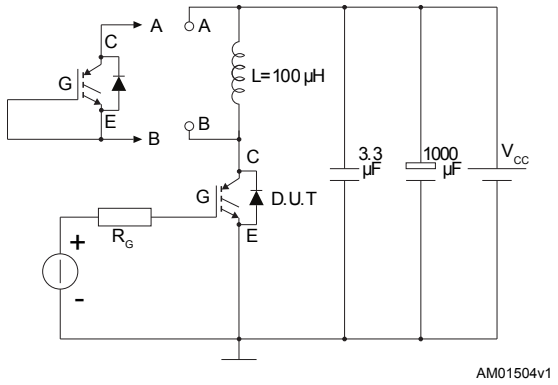


Figure 17. Gate charge test circuit

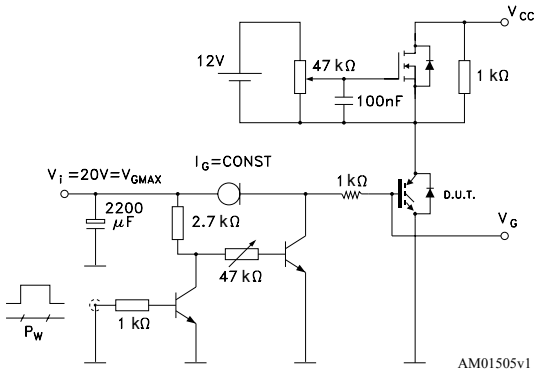


Figure 18. Switching waveform


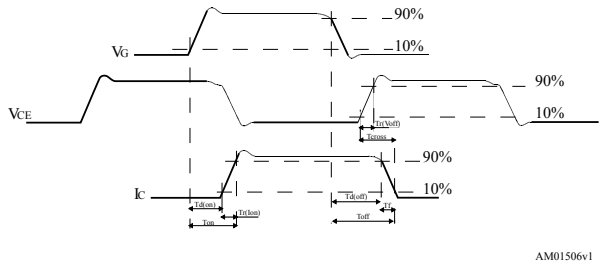


Figure 19. Diode reverse recovery waveform

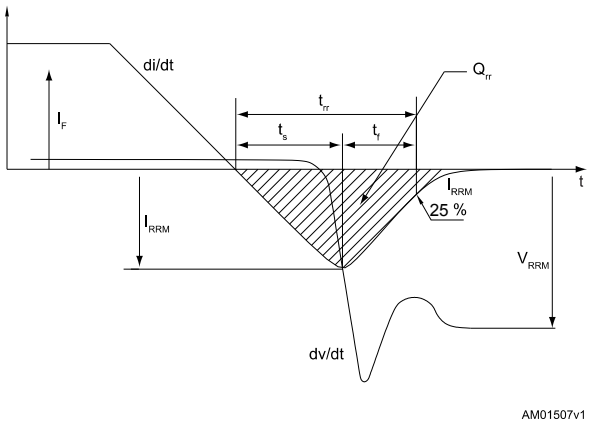

4 Topology and pin description

Figure 20. **Electrical topology and pin description**


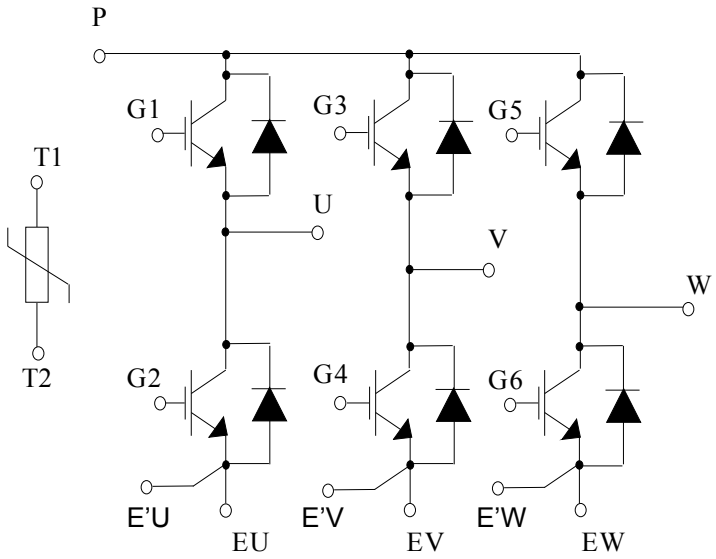


Figure 21. **Package top view with sixpack pinout**

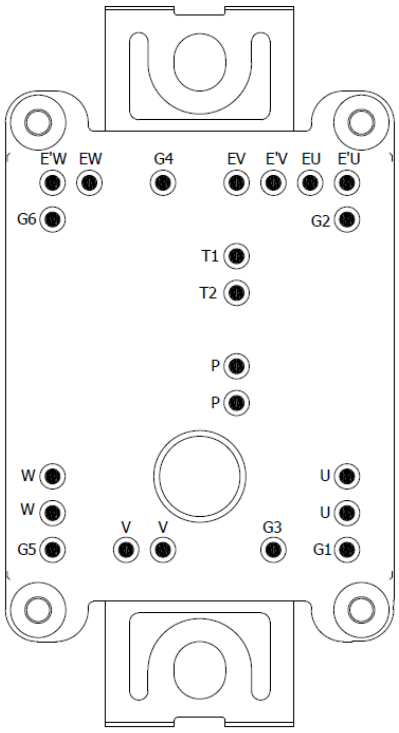


5 Package information

In order to meet environmental requirements, ST offers these devices in different grades of ECOPACK® packages, depending on their level of environmental compliance. ECOPACK® specifications, grade definitions and product status are available at: www.st.com. ECOPACK® is an ST trademark.

5.1 ACEPACK™ 1 sixpack solder pins package information

Figure 22. **ACEPACK™ 1 sixpack solder pins package outline (dimensions are in mm)**

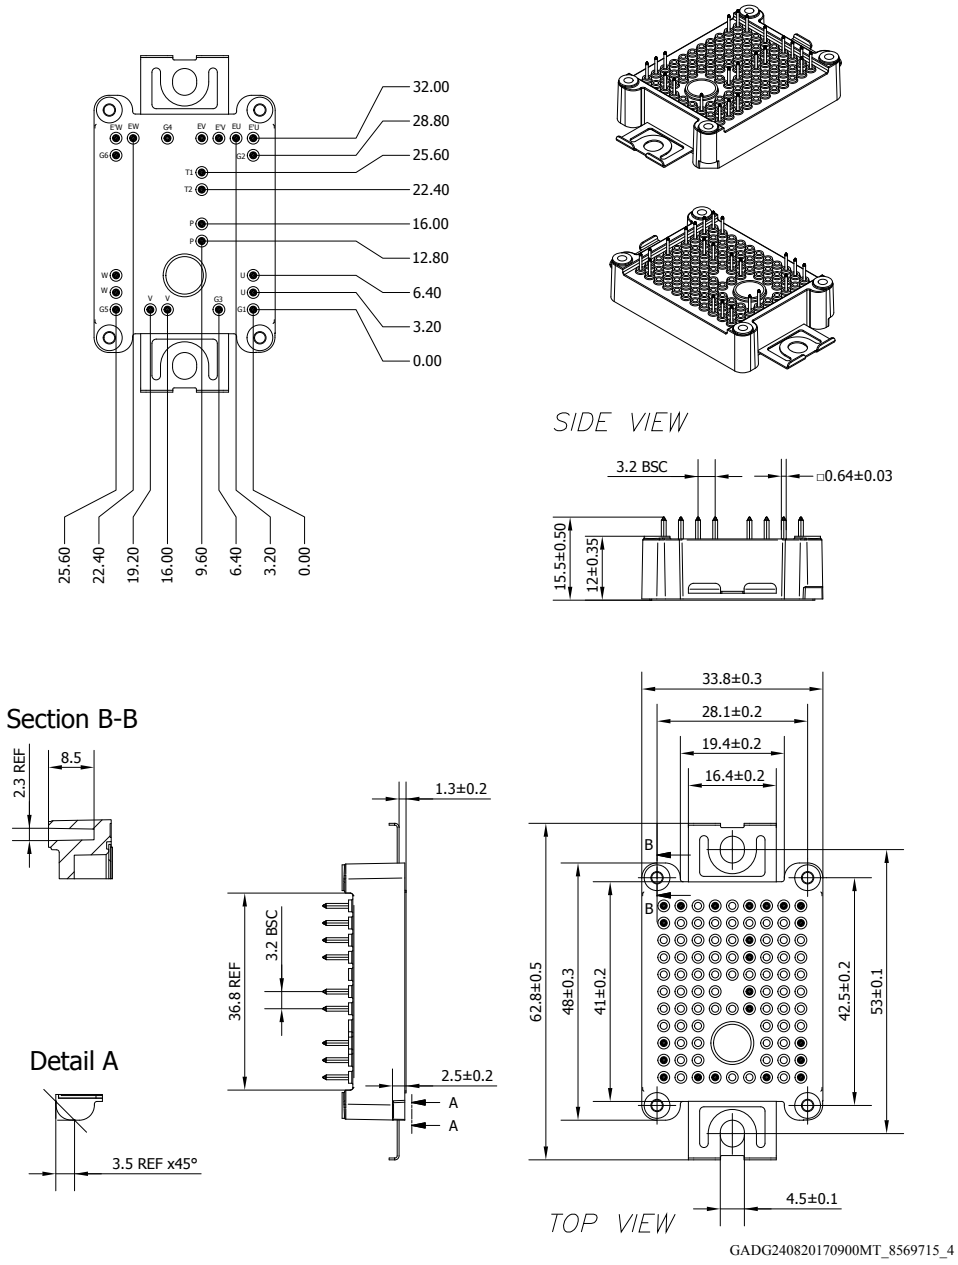

- The lead size includes the thickness of the lead plating material.
- Dimensions do not include mold protrusion.
- Package dimensions do not include any eventual metal burrs.

Revision history

Table 7. Document revision history

Date	Revision	Changes
11-Oct-2017	1	Initial release.
16-Feb-2018	2	Updated features and removed maturity status indication from cover page. Updated *Figure 13. Inverter diode thermal impedance* and *Figure 14. IGBT thermal impedance*. Updated *Figure 21. ACEPACK™ 1 sixpack solder pins package outline (dimensions are in mm)*. Minor text changes
14-Nov-2018	3	Added Figure 6. IGBT collector current vs case temperature. Minor text changes

Contents

1 **Electrical ratings** 2
1.1 IGBT 2
1.2 Diode 3
1.3 NTC 4
1.4 Package 4
2 **Electrical characteristics (curves)** 5
3 **Test circuits** 8
4 **Topology and pin description** 9
5 **Package information** 10
5.1 ACEPACK™ 1 sixpack solder pins package information 11
Revision history 12

IMPORTANT NOTICE – PLEASE READ CAREFULLY

STMicroelectronics NV and its subsidiaries (“ST”) reserve the right to make changes, corrections, enhancements, modifications, and improvements to ST products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on ST products before placing orders. ST products are sold pursuant to ST’s terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of ST products and ST assumes no liability for application assistance or the design of Purchasers’ products.

No license, express or implied, to any intellectual property right is granted by ST herein.

Resale of ST products with provisions different from the information set forth herein shall void any warranty granted by ST for such product.

ST and the ST logo are trademarks of ST. All other product or service names are the property of their respective owners.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

© 2018 STMicroelectronics – All rights reserved