



REVISION HISTORY			
ECO	REV	DESCRIPTION	APP. ENG. DATE
-	1	PRODUCTION	YL 8-7-17

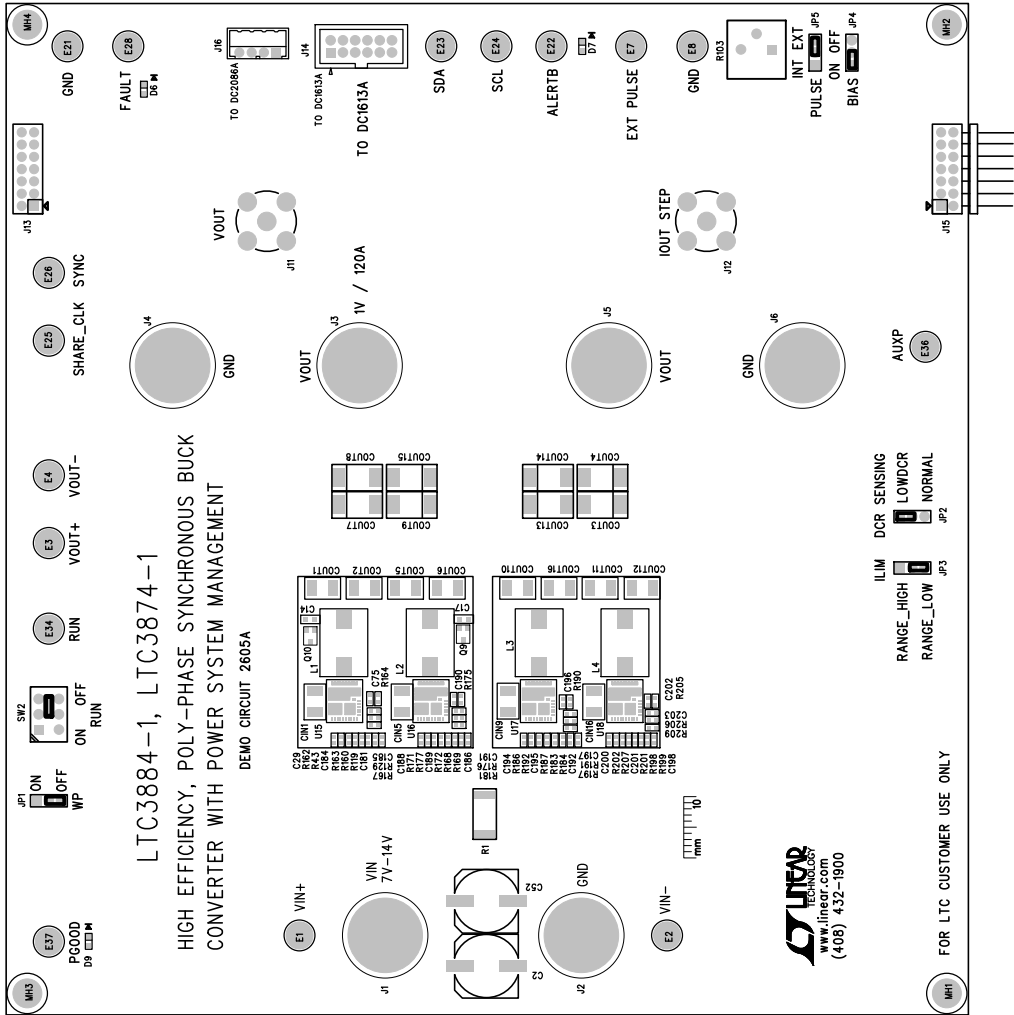

NOTES: UNLESS OTHERWISE SPECIFIED

1. WORKMANSHIP SHALL BE IN ACCORDANCE WITH IPC-A-610.
2. ASSEMBLY PROCESS SHALL INCLUDE: REFLOW SOLDER TOP SIDE SMD. MAXIMUM SOLDER TEMPERATURE IS 240 DEGREES CELSIUS.
3. PARTS TO OMIT WILL BE SPECIFIED ON THE BILL OF MATERIALS. LOCATIONS OF OMITTED PARTS SHALL BE FREE OF SOLDER. MASK THE SOLDER STENCIL WHERE SMT PARTS ARE OMITTED.
4. INSTALL SHUNTS AS SHOWN ON ASSY DRAWING.
5. DEPANLIZE BOARDS AFTER ASSEMBLY AND ROUTE-OUT THE BREAKOUT TABS ON FOUR SIDES OF THE BOARD EDGE.
6. DO NOT APPLY ANY KIND OF ASSEMBLY STAMP OR QA STAMP TO ANY BOARD.
7. INSTALL 4 STANDOFFS AT 4 LOCATIONS AS SHOWN BELOW:

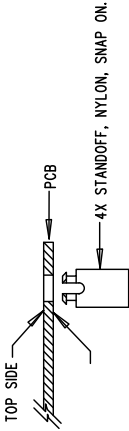

APPROVALS		LINEAR TECHNOLOGY	
PCB DES.	HZ	TITLE: TOP ASSEMBLY DRAWING	
APP ENG.	YL	HIGH EFFICIENCY, POLY-PHASE SYNCHRONOUS BUCK CONVERTER WITH POWER SYSTEM MANAGEMENT	
SIZE	N/A	IC NO.	LTC3884-1, LTC3874-1
SCALE = NONE		REV.	2
		FILENAME:	DC2605A-2.PCB
			SHT 1 OF 2