IXYS

HiPerFET™ Power MOSFETs Q-CLASS


IXFK 24N90Q
IXFX 24N90Q

V_{DSS} = 900 V
I_{D25} = 24 A
$R_{DS(on)}$ = 0.45 Ω

$t_{rr} \leq$ 250 ns


Single MOSFET Die

N-Channel Enhancement Mode
Avalanche Rated, Low Qg,
High dV/dt, Low t_{rr}




Preliminary data sheet

PLUS 247™ (IXFX)



TO-264 AA (IXFK)



G = Gate D = Drain
S = Source TAB = Drain

Symbol	Test Conditions		Maximum Ratings	
V_{DSS}	T_J = 25°C to 150°C		900	V
V_{DGR}	T_J = 25°C to 150°C; R_{GS} = 1 MΩ		900	V
V_{GS}	Continuous		±20	V
V_{GSM}	Transient		±30	V
I_{D25}	T_C = 25°C		24	A
I_{DM}	T_C = 25°C, pulse width limited by T_{JM}		96	A
I_{AR}	T_C = 25°C		24	A
E_{AR}	T_C = 25°C		60	mJ
E_{AS}	T_C = 25°C		2.5	J
dv/dt	$I_S \leq I_{DM}$, di/dt ≤ 100 A/μs, $V_{DD} \leq V_{DSS}$ $T_J \leq$ 150°C, R_G = 2 Ω		5	V/ns
P_D	T_C = 25°C		500	W
T_J			-55 ... +150	°C
T_{JM}			150	°C
T_{stg}			-55 ... +150	°C
T_L	1.6 mm (0.063 in.) from case for 10 s		300	°C
M_d	Mounting torque	TO-264	0.4/6	Nm/lb.in.
Weight		PLUS 247	6	g
		TO-264	10	g

Symbol	Test Conditions		Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
V_{DSS}	V_{GS} = 0 V, I_D = 250uA		900			V
$V_{GS(th)}$	$V_{DS} = V_{GS}$, I_D = 4mA		2.5		4.5	V
I_{GSS}	V_{GS} = ±20 V, V_{DS} = 0				±100	nA
I_{DSS}	$V_{DS} = V_{DSS}$				100	μA
	V_{GS} = 0 V	T_J = 125°C			2	mA
$R_{DS(on)}$	V_{GS} = 10 V, $I_D = 0.5 \bullet I_{D25}$ Note 1				0.45	Ω

Features
- IXYS advanced low Q_g process
- Low gate charge and capacitances
  - easier to drive
  - faster switching
- International standard packages
- Low $R_{DS(on)}$
- Rated for unclamped Inductive load switching (UIS) rated
- Molding epoxies meet UL 94 V-0 flammability classification

Applications
- DC-DC converters
- Battery chargers
- Switched-mode and resonant-mode power supplies
- DC choppers
- AC motor control
- Temperature and lighting controls

Advantages
- PLUS 247™ package for clip or spring mounting
- Space savings
- High power density

© 2000 IXYS All rights reserved


Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
g_{fs}	V_{DS} = 10 V; I_D = 0.5 • I_{D25} Note 1	16	22		S
C_{iss}	V_{GS} = 0 V, V_{DS} = 25 V, f = 1 MHz		5900		pF
C_{oss}			650		pF
C_{rss}			130		pF
$t_{d(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25} R_G = 1 Ω (External),		25		ns
t_r			21		ns
$t_{d(off)}$			60		ns
t_f			12		ns
$Q_{g(on)}$	V_{GS} = 10 V, V_{DS} = 0.5 • V_{DSS}, I_D = 0.5 • I_{D25}		170		nC
Q_{gs}			38		nC
Q_{gd}			75		nC
R_{thJC}				0.26	K/W
R_{thCK}			0.15		K/W

Source-Drain Diode

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
I_S	V_{GS} = 0 V			24	A
I_{SM}	Repetitive; pulse width limited by T_{JM}			96	A
V_{SD}	$I_F = I_S$, V_{GS} = 0 V, Note 1			1.5	V
t_{rr}	$I_F = I_S$,-di/dt = 100 A/μs, V_R = 100 V			250	ns
Q_{RM}			1.4		μC
I_{RM}			9		A

Note: 1. Pulse test, t ≤ 300 μs, duty cycle d ≤ 2 %


PLUS 247™ Outline

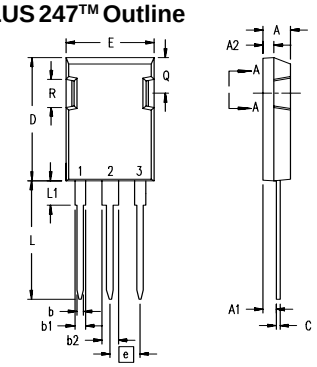

Terminals: 1 - Gate
2 - Drain (Collector)
3 - Source (Emitter)
4 - Drain (Collector)

Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.83	5.21	.190	.205
A_1	2.29	2.54	.090	.100
A_2	1.91	2.16	.075	.085
b	1.14	1.40	.045	.055
b_1	1.91	2.13	.075	.084
b_2	2.92	3.12	.115	.123
C	0.61	0.80	.024	.031
D	20.80	21.34	.819	.840
E	15.75	16.13	.620	.635
e	5.45 BSC		.215 BSC	
L	19.81	20.32	.780	.800
L1	3.81	4.32	.150	.170
Q	5.59	6.20	.220	0.244
R	4.32	4.83	.170	.190

TO-264 AA Outline



Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.82	5.13	.190	.202
A1	2.54	2.89	.100	.114
A2	2.00	2.10	.079	.083
b	1.12	1.42	.044	.056
b1	2.39	2.69	.094	.106
b2	2.90	3.09	.114	.122
c	0.53	0.83	.021	.033
D	25.91	26.16	1.020	1.030
E	19.81	19.96	.780	.786
e	5.46 BSC		.215 BSC	
J	0.00	0.25	.000	.010
K	0.00	0.25	.000	.010
L	20.32	20.83	.800	.820
L1	2.29	2.59	.090	.102
P	3.17	3.66	.125	.144
Q	6.07	6.27	.239	.247
Q1	8.38	8.69	.330	.342
R	3.81	4.32	.150	.170
R1	1.78	2.29	.070	.090
S	6.04	6.30	.238	.248
T	1.57	1.83	.062	.072

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETS and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,881,106 5,017,508 5,049,961 5,187,117 5,486,715 4,850,072 4,931,844 5,034,796 5,063,307 5,237,481 5,381,025