
IXYS

High Voltage IGBT

IXGH 32N170A
IXGT 32N170A


V_{CES} = 1700 V
I_{C25} = 32 A
$V_{CE(sat)}$ = 5.0 V
$t_{fi(typ)}$ = 50 ns




Symbol	Test Conditions	Maximum Ratings	
V_{CES}	T_J = 25°C to 150°C	1700	V
V_{CGR}	T_J = 25°C to 150°C; R_{GE} = 1 MΩ	1700	V
V_{GES}	Continuous	±20	V
V_{GEM}	Transient	±30	V
I_{C25}	T_C = 25°C	32	A
I_{C90}	T_C = 90°C	21	A
I_{CM}	T_C = 25°C, 1 ms	110	A
SSOA (RBSOA)	V_{GE} = 15 V, T_{VJ} = 125°C, R_G = 5Ω Clamped inductive load	I_{CM} = 70 @ 0.8 V_{CES}	A
t_{SC}	T_J = 125°C, V_{CE} = 1200 V; V_{GE} = 15 V, R_G = 10Ω	10	µs
P_C	T_C = 25°C	350	W
T_J		-55 ... +150	°C
T_{JM}		150	°C
T_{stg}		-55 ... +150	°C
M_d	Mounting torque (M3) (TO-247)	1.13/10	Nm/lb.in.
Maximum lead temperature for soldering 1.6 mm (0.062 in.) from case for 10 s		300	°C
Weight	TO-247 TO-268	6 4	g g

Symbol	Test Conditions	Characteristic Values (T_J = 25°C, unless otherwise specified) min.	typ.	max.	
BV_{CES}	I_C = 250 µA, V_{GE} = 0 V	1700			V
$V_{GE(th)}$	I_C = 250 µA, V_{CE} = V_{GE}	3.0		5.0	V
I_{CES}	V_{CE} = 0.8 • V_{CES} T_J = 25°C V_{GE} = 0 V Note 1 T_J = 125°C			50 2	µA mA
I_{GES}	V_{CE} = 0 V, V_{GE} = ±20 V			±100	nA
$V_{CE(sat)}$	I_C = I_{C90}, V_{GE} = 15 V T_J = 25°C T_J = 125°C		4.0 4.8	5.0	V V

TO-268 (IXGT)



TO-247 AD (IXGH)



G = Gate, C = Collector,
E = Emitter, TAB = Collector

Features
- International standard packages JEDEC TO-268 and JEDEC TO-247 AD
- High current handling capability
- MOS Gate turn-on
  - drive simplicity
- Rugged NPT structure
- Molding epoxies meet UL 94 V-0 flammability classification

Applications
- Capacitor discharge & pulser circuits
- AC motor speed control
- DC servo and robot drives
- DC choppers
- Uninterruptible power supplies (UPS)
- Switched-mode and resonant-mode power supplies

Advantages
- High power density
- Suitable for surface mounting
- Easy to mount with 1 screw, (isolated mounting screw hole)

© 2004 IXYS All rights reserved


Symbol	Test Conditions (T_J = 25°C, unless otherwise specified)	min.	typ.	max.	
g_{fs}	$I_C = I_{90}$; V_{CE} = 10 V, Note 2	16	26		S
C_{ies}	V_{CE} = 25 V, V_{GE} = 0 V, f = 1 MHz		3700		pF
C_{oes}			180		pF
C_{res}			43		pF
Q_g	$I_C = I_{C90}$, V_{GE} = 15 V, V_{CE} = 0.5 V_{CES}		155		nC
Q_{ge}			28		nC
Q_{gc}			49		nC
$t_{d(on)}$	**Inductive load, T_J = 25°C**		46		ns
t_{ri}	$I_C = I_{C25}$, V_{GE} = 15 V		57		ns
$t_{d(off)}$	R_G = 2.7 Ω, V_{CE} = 0.5 V_{CES}		260	500	ns
t_{fi}	Note 3		50	100	ns
E_{off}			1.5	2.6	mJ
$t_{d(on)}$	**Inductive load, T_J = 125°C**		48		ns
t_{ri}	$I_C = I_{C25}$, V_{GE} = 15 V		59		ns
E_{on}	R_G = 2.7 Ω, V_{CE} = 0.5 V_{CES}		4.0		mJ
$t_{d(off)}$	Note 3		300		ns
t_{fi}			70		ns
E_{off}			2.4		mJ
R_{thJC}				0.35	K/W
R_{thCK}	(TO-247)		0.25		K/W

Notes: 1. Device must be heatsunk for high temperature leakage current measurements to avoid thermal runaway.

2. Pulse test, t ≤ 300 µs, duty cycle ≤ 2 %


3. Switching times may increase for V_{CE} (Clamp) > 0.8 • V_{CES}, higher T_J or increased R_G.


TO-247 AD Outline



Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.7	5.3	.185	.209
A_1	2.2	2.54	.087	.102
A_2	2.2	2.6	.059	.098
b	1.0	1.4	.040	.055
b_1	1.65	2.13	.065	.084
b_2	2.87	3.12	.113	.123
C	.4	.8	.016	.031
D	20.80	21.46	.819	.845
E	15.75	16.26	.610	.640
e	5.20	5.72	0.205	0.225
L	19.81	20.32	.780	.800
L1		4.50		.177
ØP	3.55	3.65	.140	.144
Q	5.89	6.40	0.232	0.252
R	4.32	5.49	.170	.216
S	6.15 BSC		242 BSC	

TO-268 Outline





Dim.	Millimeter Min.	Max.	Inches Min.	Max.
A	4.9	5.1	.193	.201
A_1	2.7	2.9	.106	.114
A_2	.02	.25	.001	.010
b	1.15	1.45	.045	.057
b_2	1.9	2.1	.75	.83
C	.4	.65	.016	.026
D	13.80	14.00	.543	.551
E	15.85	16.05	.624	.632
E_1	13.3	13.6	.524	.535
e	5.45 BSC		.215 BSC	
H	18.70	19.10	.736	.752
L	2.40	2.70	.094	.106
L1	1.20	1.40	.047	.055
L2	1.00	1.15	.039	.045
L3	0.25 BSC		.010 BSC	
L4	3.80	4.10	.150	.161

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065B1 6,683,344 6,727,585 4,850,072 5,017,508 5,063,307 5,381,025 6,259,123B1 6,534,343 6,710,405B2 6,759,692 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463

Fig. 1. Output Characteristics @ 25 Deg. C

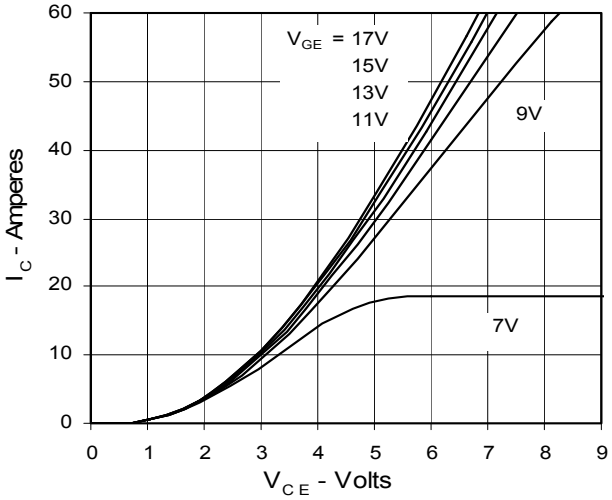


Fig. 2. Extended Output Characteristics @ 25 deg. C

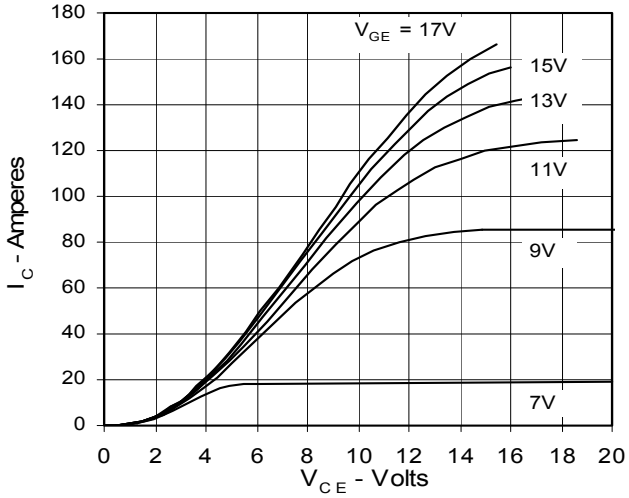


Fig. 3. Output Characteristics @ 125 Deg. C

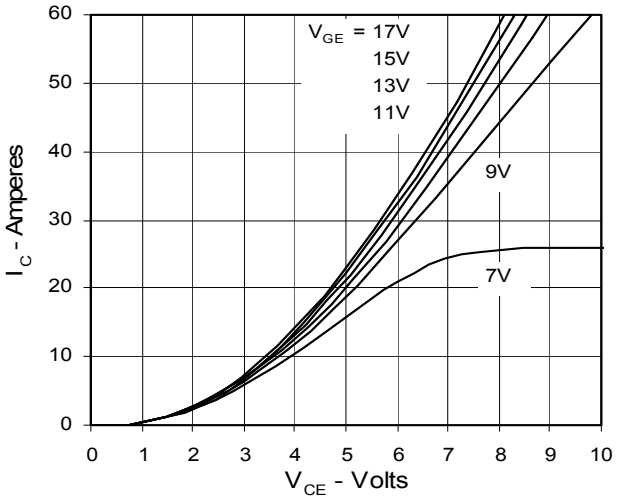


Fig. 4. Dependence of $V_{CE(sat)}$ on Temperature

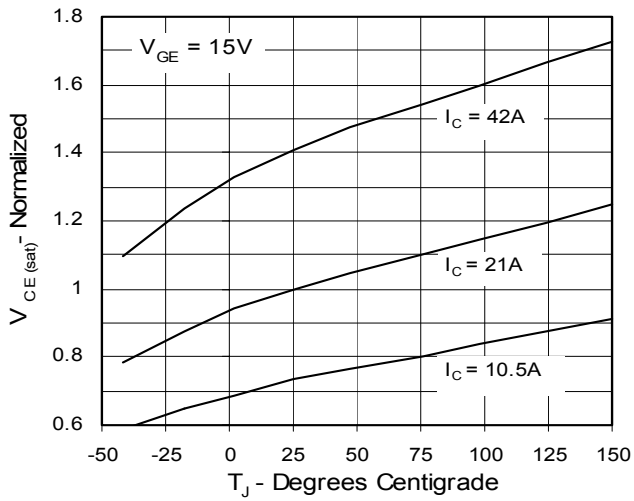


Fig. 5. Collector-to-Emitter Voltage vs. Gate-to-Emiiter voltage


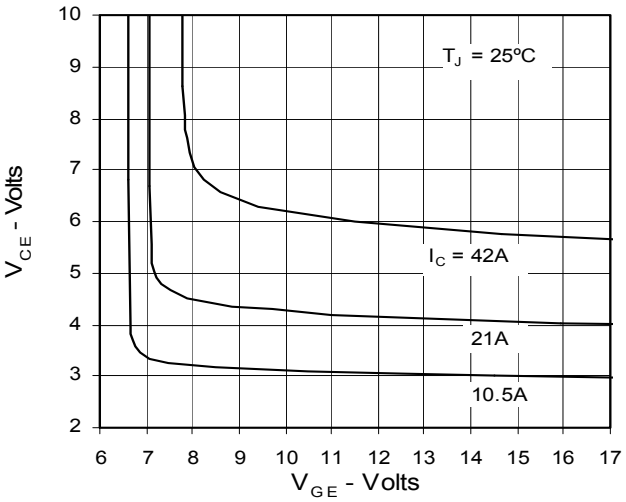


Fig. 6. Input Admittance

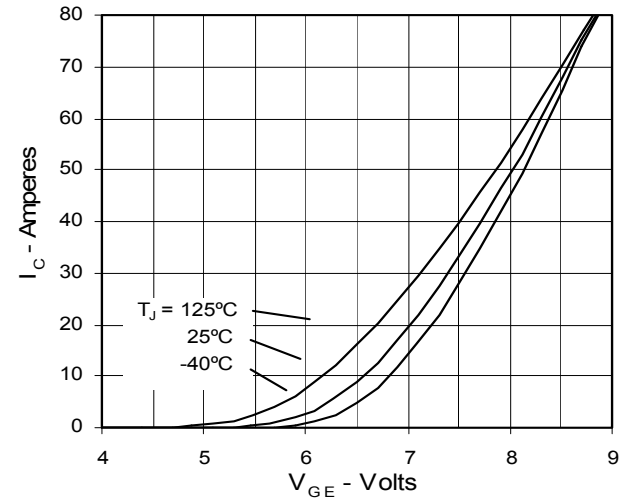

© 2004 IXYS All rights reserved

Fig. 7. Transconductance

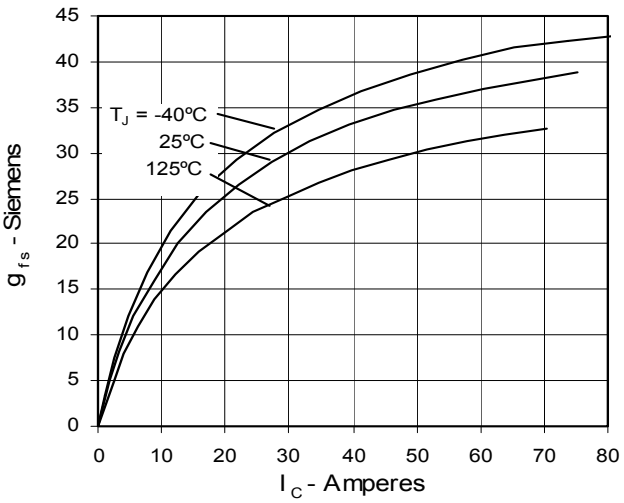


Fig. 8. Dependence of E_{off} on R_G

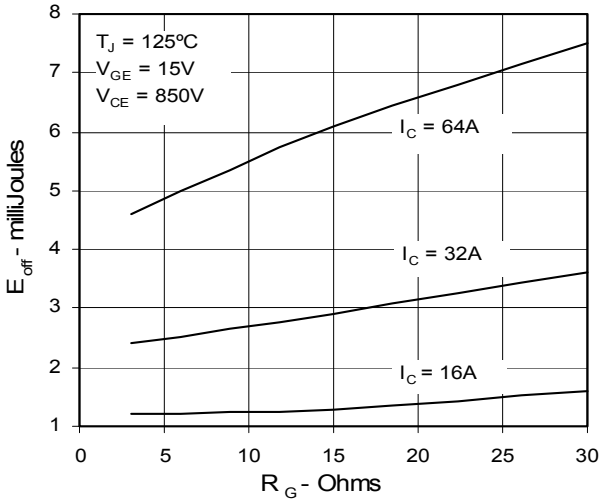


Fig. 9. Dependence of E_{off} on I_c

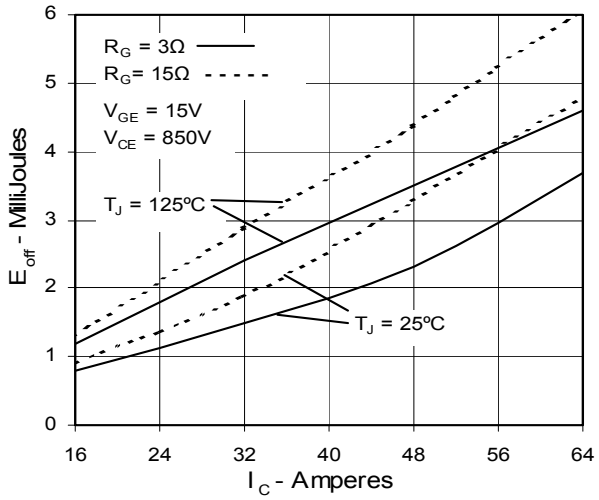


Fig. 10. Dependence of E_{off} on Temperature

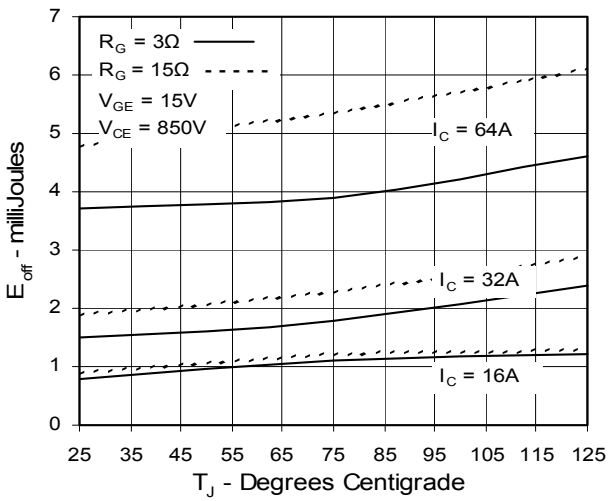


Fig. 11. Gate Charge


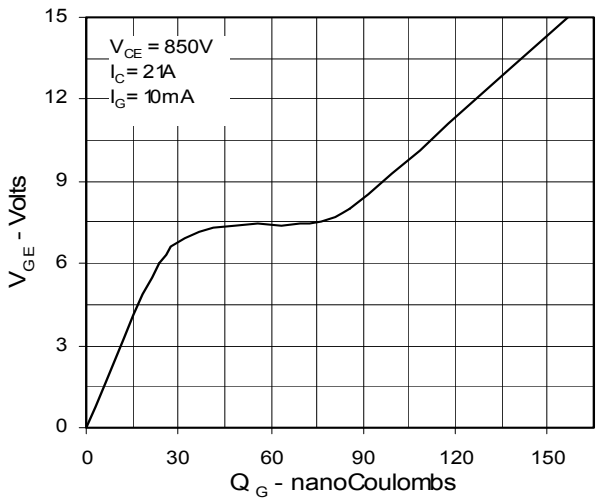



Fig. 12. Capacitance

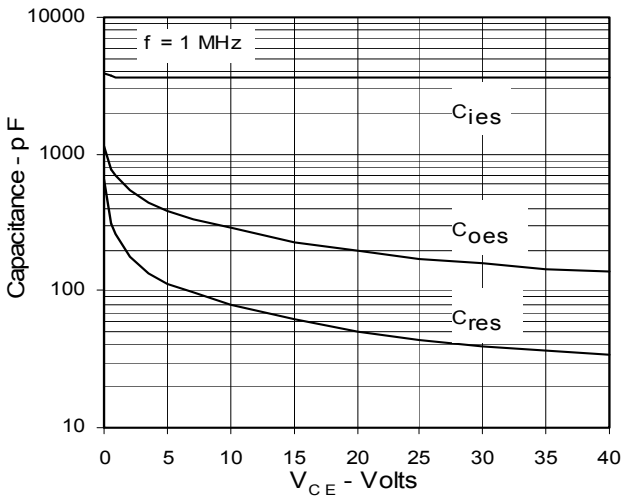

IXYS reserves the right to change limits, test conditions, and dimensions.

IXYS MOSFETs and IGBTs are covered by one or more of the following U.S. patents: 4,835,592 4,931,844 5,049,961 5,237,481 6,162,665 6,404,065B1 6,683,344 6,727,585 4,850,072 5,017,508 5,063,307 5,381,025 6,259,123B1 6,534,343 6,710,405B2 6,759,692 4,881,106 5,034,796 5,187,117 5,486,715 6,306,728 B1 6,583,505 6,710,463

Fig. 13. Maximum Transient Thermal Resistance

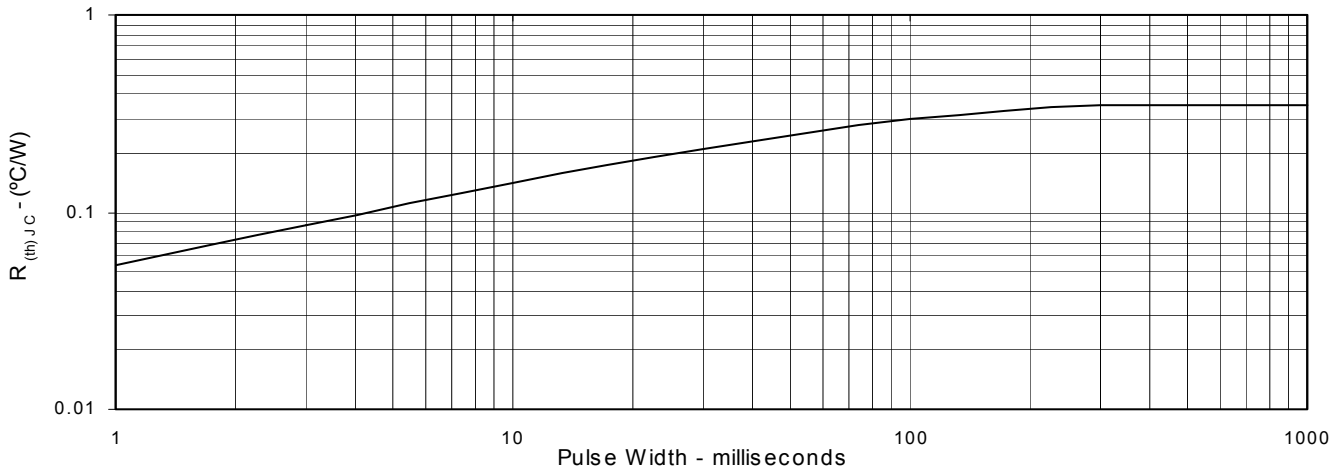

© 2004 IXYS All rights reserved



Disclaimer Notice - Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications.Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.