
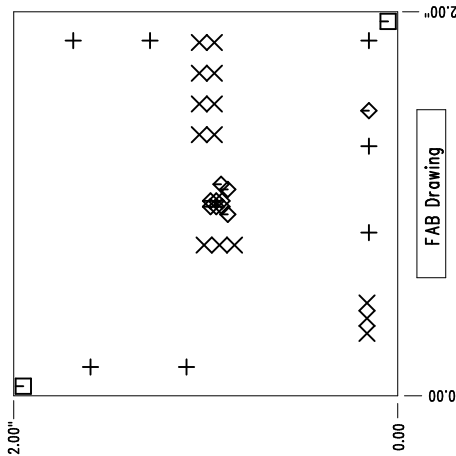


REVISIONS		
REV	DESCRIPTION	DATE

NOTES : Unless Otherwise Specified


1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.  
2 OZ. COPPER FINISHED ON OUTER LAYERS.  
1 OZ. COPPER FINISHED ON INNER LAYERS.  
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.  
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. SIZE: DIMENSIONS AND TOLERANCES SHOWN.  
0.00 ARE PRIMARY DATUMS.
4. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER. .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.  
HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER
5. FINISH: SMOBC USING LPI BOTH SIDES COLOR GREEN.  
WHITE TIN IMMERSION (OMIKRON) BOTH SIDES.
6. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
7. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.

8. SCORING:



SIZE	QTY	SYM	PLTD
95	7	+	PLTD
35	14	X	PLTD
70	2	□	NPLTD
10	10	◇	PLTD

FAB DRAWING

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOLERANCES ON ANGLE ±1 2 PLACE ±.01 3 PLACE ±.005 INTERPRET DIM AND TOL PER ASME Y14.5M - 1994				APPROVALS		<div>LINEAR TECHNOLOGY</div> <div>1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900</div>	
		DRAWN		INIT		DATE	
		CHECK					
		DESIGN		JUNE WU		10/15/04	
		ENGR		Tom Gross		10/15/04	
				SIZE		A	
				IDEMO		DC833A	
				REV.		A	
TITLE:				LTC3026DED, Low Input Voltage VLD0 Linear Regulator			
SCALE = NONE				DES-230719		SHT 1 of 1	