


SIZE	QTY	SYM	PLTD
95	5	+	PLTD
15	20	X	PLTD
20	27	□	PLTD
70	2	⊗	NPLTD

NOTES : Unless Otherwise Specified

1. FAB PER IPC-A-600.
2. MATERIAL: EPOXY FIBERGLASS, NEMA GRADE FR-4.  
2 OZ. COPPER FINISHED ON OUTER LAYERS.  
1 OZ. COPPER FINISHED ON INNER LAYERS.  
THICKNESS .062 +/- .006 TOTAL OF 4 LAYERS.  
FLAMABILITY RATING: 94 V-0 MINIMUM .
3. DRILLING: DRILL HOLES PER SCHEDULE. PLATE THROUGH HOLES WITH COPPER, .001 INCH THICK MIN. ALL HOLE SIZES ARE SPECIFIED AFTER PLATING.  
HOLE LOCATION TOLERANCES ARE +/- .003 INCH IN RELATION TO CENTER
4. SOLDER MASK : SMOBC USING LPI BOTH SIDES COLOR RED.  
GOLD IMMERSION BOTH SIDES.
5. SILKSCREEN : USING WHITE NON-CONDUCTIVE EPOXY INK.
6. DO NOT ALTER ARTWORK e.g. TO ADD LOGO OR DATE CODE.
7. SCORING:

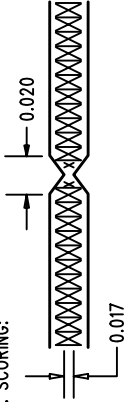

FAB DRAWING

APPROVALS		LINEAR TECHNOLOGY		1630 McCarthy Blvd. Milpitas, CA 95035 PH: (408)432-1900	
DRAWN	INIT	DATE			
CHECK					
DESIGN	JUNE WU	2/18/03	TITLE: LTC3803ES6, Telecom DC/DC Converter		
ENGR	G. Perica	2/18/03			
			SIZE	DEM	REV. A
			A	DC649A	A
SCALE = NONE			DES-230609		SHT 1 of 1